THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

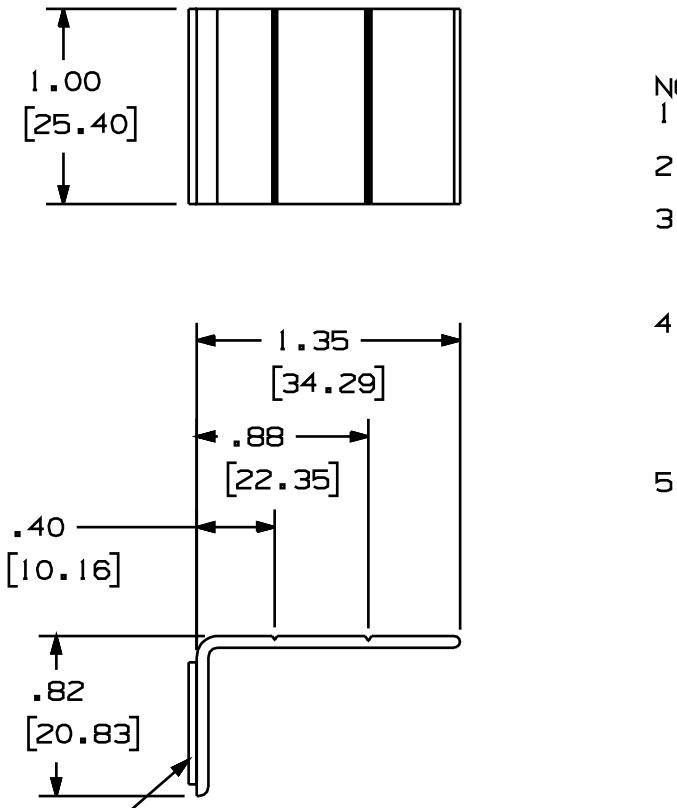

NOTE.
1. SEE CURRENT CATALONG FOR PART NO. SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
2. PART IS DESIGNED TO SUPPORT 31LBS[141g] MAX. WEIGHT PER 1.00[25.4mm] ON A CLEAN, DRY, SMOOTH SURFACE.
3. TO APPLY:
   a. REMOVE PROTECTIVE LINER.
   b. PLACE IN DESIRED LOCATION.
   c. APPLY PRESSURE TO THE RETAINER.
4. USE RETAINER AT FULL HEIGHT FOR BEST WIRE RETENTION WITHIN 2" WIDE PANDUIT SOLID WALL DUCT SIZES. SNAP RETAINER AT .88"[22.35mm] HEIGHT FOR BEST WIRE RETENTION WITHIN 1.5" WODE PANDUIT SOLID WALL DUCT SIZES. SNAP RETAINER AT .40"[10.16] HEIGHT FOR BEST WIRE RETENTION WITHIN 1" WIDE PANDUIT SOLID WALL DUCT SIZES.
5. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITION UNDER WHICH THESE MOUNTS MAY BE APPLED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
R	9-17-01	JCST	JKG	RELEASED TO PRODUCTION	36402-11	JKG	JKG

CAD FILENAME/LAYERS: D364002BJ_DC_WRS-A_00A.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

SOLID WALL DUCT WIRE RETAINER (WRS-A) CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± .1 (.XXX) ± .005
(.XX) ± .01 ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: JCST
DATE: 9-17-01
CHK'D: JKG
MAT'L: POLYVINYL CHLORIDE
SCALE: FULL
DRAWING NO.: 36402-11
SIZE: A