

LOC		DIST		REVISIONS					
FX		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				D		REVISED PER ECO-09-011983	19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1




OPTION "A"




OPTION "B"

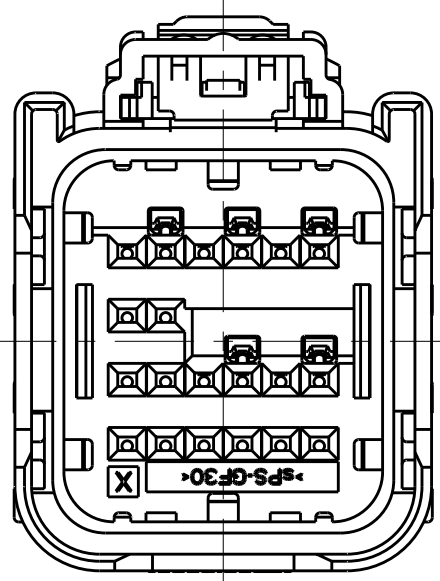


OPTION "C"

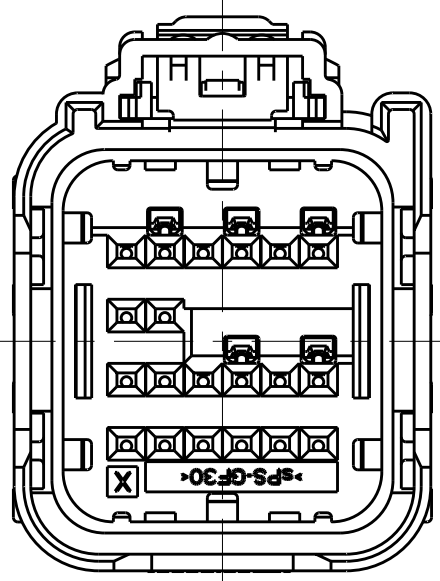

OPTION "D"

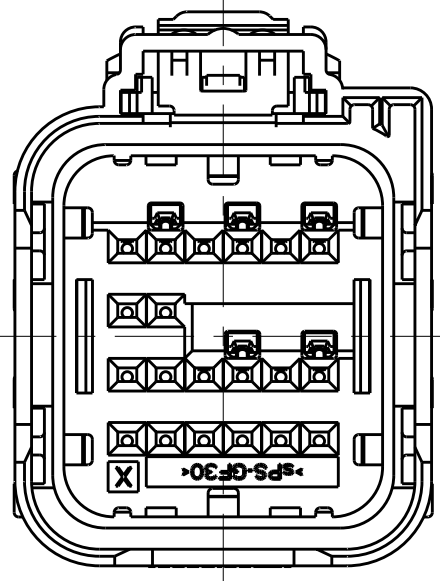

OPTION "E"

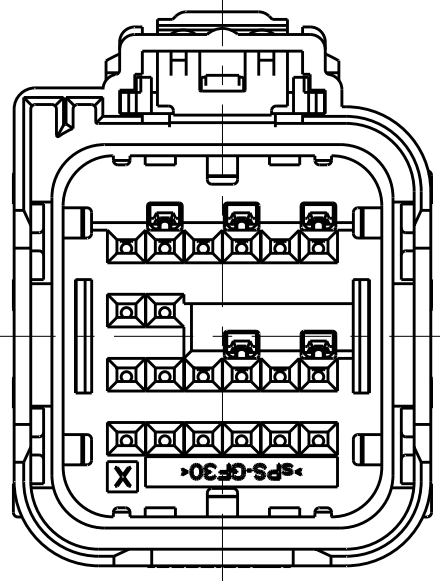



OPTION "F"




SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

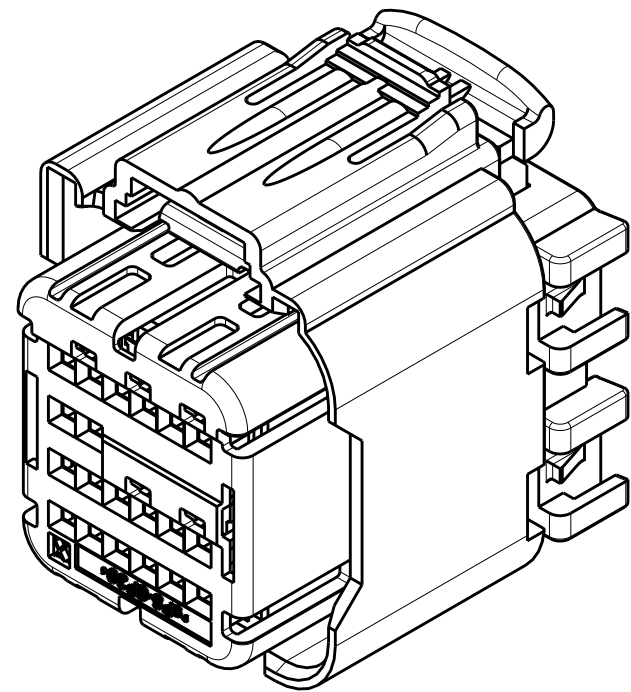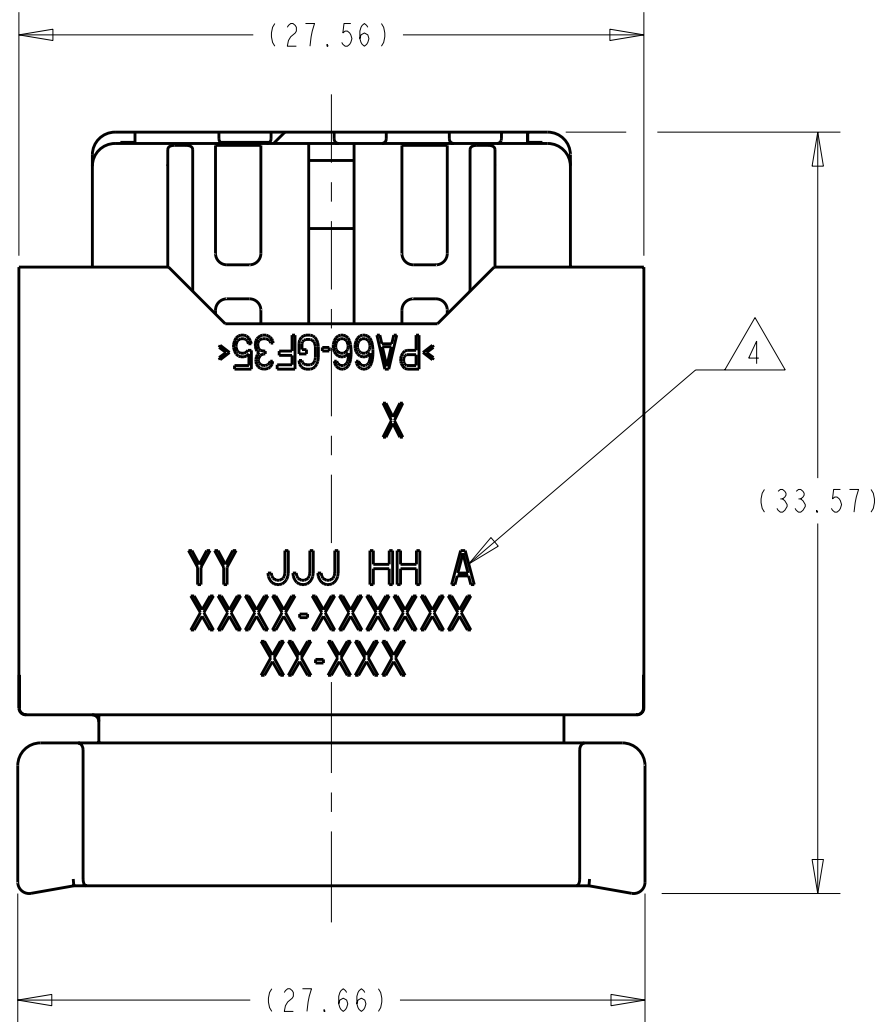

SCALE 2:1

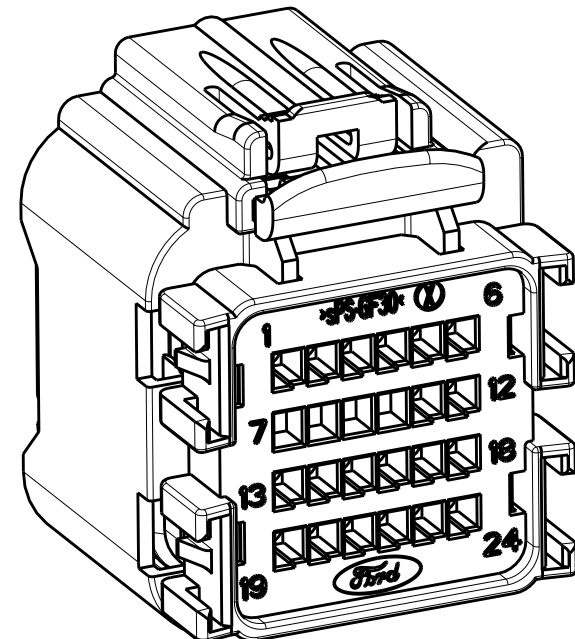

SCALE 2:1

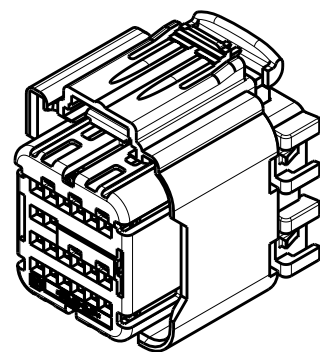

SCALE 1:1

KEYING OPTION "A" SHOWN

		SCALE 1:1		KEYING OPTION "A" SHOWN			
		ASSEMBLY PART NUMBER					
3-1924672-1	1	1	1	7	CPA	PBT-GF15	RED
1924681-1	1	1	1	6	PERIMETER SEAL	SILICONE	GREEN
1924680-1	1	1	1	5	GROMMET	SILICONE	BROWN
3-1924672-4	1	1	1	4	SHORTING BAR	S.S.	SEE COMPONENT DRAWING
3-1924672-3	1	1	1	3	COVER	PA66 35% GF	BLACK
3-1924672-2	1	1	1	2	SPACER FOR SHORTING BAR APPLICATIONS	sPS 30% GF	NATURAL
5-1924670-1	1	1	1	1	PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
5-1924670-0	1	1	1		PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-9	1	1	1		PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-8	1	1	1		PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
4-1924670-7	1	1	1				
4-1924670-6	1	1	1				
4-1924670-5	5	5	5				
4-1924670-4	5	5	5				
4-1924670-3	5	5	5				
4-1924670-2	5	5	5				
4-1924670-1	5	5	5				
4-1924670-0	5	5	5				
3-1924670-9	5	5	5				
3-1924670-8	5	5	5				
3-1924670-7	5	5	5				
3-1924670-6	5	5	5				
3-1924670-5	5	5	5				
3-1924670-4	5	5	5				
3-1924670-3	5	5	5				
3-1924670-2	5	5	5				
1924671-5	5	5	5				
1924671-4	5	5	5				
1924671-3	5	5	5				
3-1924670-0	5	5	5				
3-1924672-0	5	5	5				
2-1924672-9	5	5	5				
2-1924672-8	5	5	5				
2-1924672-7	5	5	5				
2-1924672-6	5	5	5				
2-1924672-5	5	5	5				
2-1924672-4	5	5	5				
2-1924672-3	5	5	5				
2-1924672-2	5	5	5				
2-1924672-1	5	5	5				
2-1924672-0	5	5	5				
1-1924672-9	5	5	5				
1924672-8	5	5	5				
1924672-7	5	5	5				
1924672-6	5	5	5				
1924672-5	5	5	5				
1924672-4	5	5	5				
1924672-3	5	5	5				
1924672-2	5	5	5				
1924672-1	5	5	5				
1924671-2	5	5	5				
2-1924670-8	5	5	5				
1924671-1	5	5	5				
2-1924670-7	5	5	5				
2-1924670-6	5	5	5				
2-1924670-5	5	5	5				
2-1924670-4	5	5	5				
2-1924670-3	5	5	5				
2-1924670-2	5	5	5				
2-1924670-1	5	5	5				
2-1924670-0	5	5	5				
1-1924670-9	5	5	5				
1-1924670-8	5	5	5				
1924670-7	5	5	5				
1924670-6	5	5	5				
1924670-5	5	5	5				
1924670-4	5	5	5				
1-1924670-3	5	5	5				
1924670-2	5	5	5				
1924670-1	5	5	5				
1-1924670-0	5	5	5				
1924670-9	5	5	5				
1924670-8	5	5	5				
1924670-7	5	5	5				
1924670-6	5	5	5				
1924670-5	5	5	5				
1924670-4	5	5	5				
1924670-3	5	5	5				
1924670-2	5	5	5				
1924670-1	5	5	5				
1924670-0	5	5	5				
QUANTITY				ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR

					7	8	9	10	11						17	18					23		Y	3-1924672-0	KEY B
					7	8	9	10	11						17	18					23		Y	2-1924672-9	KEY A
					7	8	9	10														Y	2-1924672-8	KEY B	
			5	6	7	8	9	10							17	18	19				23	24	Y	2-1924672-7	KEY A
			5	6	7	8	9	10							17	18	19	20			23	24	Y	2-1924672-6	KEY A
					7	8	9	10							17	18		20	21	22			Y	2-1924672-5	KEY A
					7	8	9	10					15		18		20				23	24	Y	2-1924672-4	KEY A
						7	8	9	10				15		18						23	24	Y	2-1924672-3	KEY A
			5	6	7	8	9	10			13	14			17	18	19				23	24	Y	2-1924672-2	KEY A
			5	6	7	8	9	10			13	14			17	18	19	20			23	24	Y	2-1924672-1	KEY A
			5	6	7	8	9	10			13	14	15		17	18			21		23		Y	2-1924672-0	KEY A
					7	8	9	10					15		17	18					23	24	Y	1-1924672-9	KEY A
					7	8	9	10					15		17	18			21		23	24	Y	1-1924672-8	KEY A
					7	8	9	10								18	19		21		23	24	Y	1-1924672-7	KEY A
					7	8	9	10								18	19				23	24	Y	1-1924672-6	KEY A

[illegible]

PLUG
KEYING OPTION

AMP 4805 REV 31MAR2000