


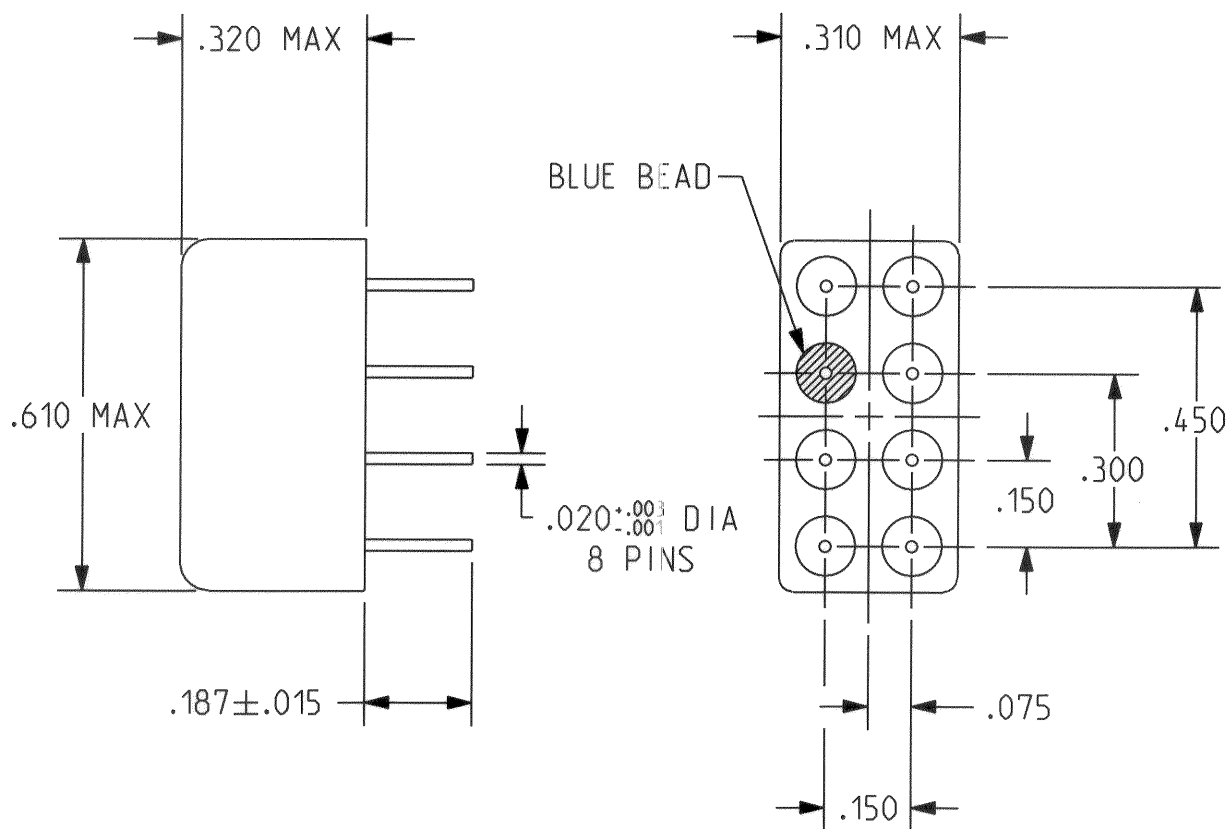

REV. A

DCO 144519

COIL: @ 25°C

RESISTANCE 44 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.4 VDC

MUST RELEASE 1.45 VDC MAX. 0.26 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

BOUNCE 2.0 MS MAX.

CUSTOMER DATA SHEET

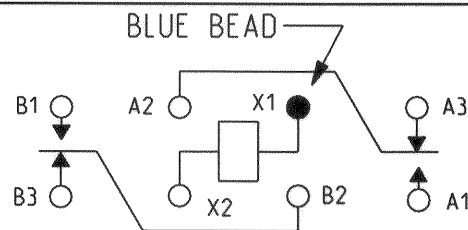

TERMINAL VIEW

CONTACT RATING:
LOW LEVEL TO 2A 28VDC RES.,
100,000 OPS

DR. B.D. 11SEP2008

CM 3 9/11/08

Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL
CUST. NO. M39016/13-073L REV.

TE NUMBER
3-1617072-6

CII PART NUMBER
3SBC 1538A2