


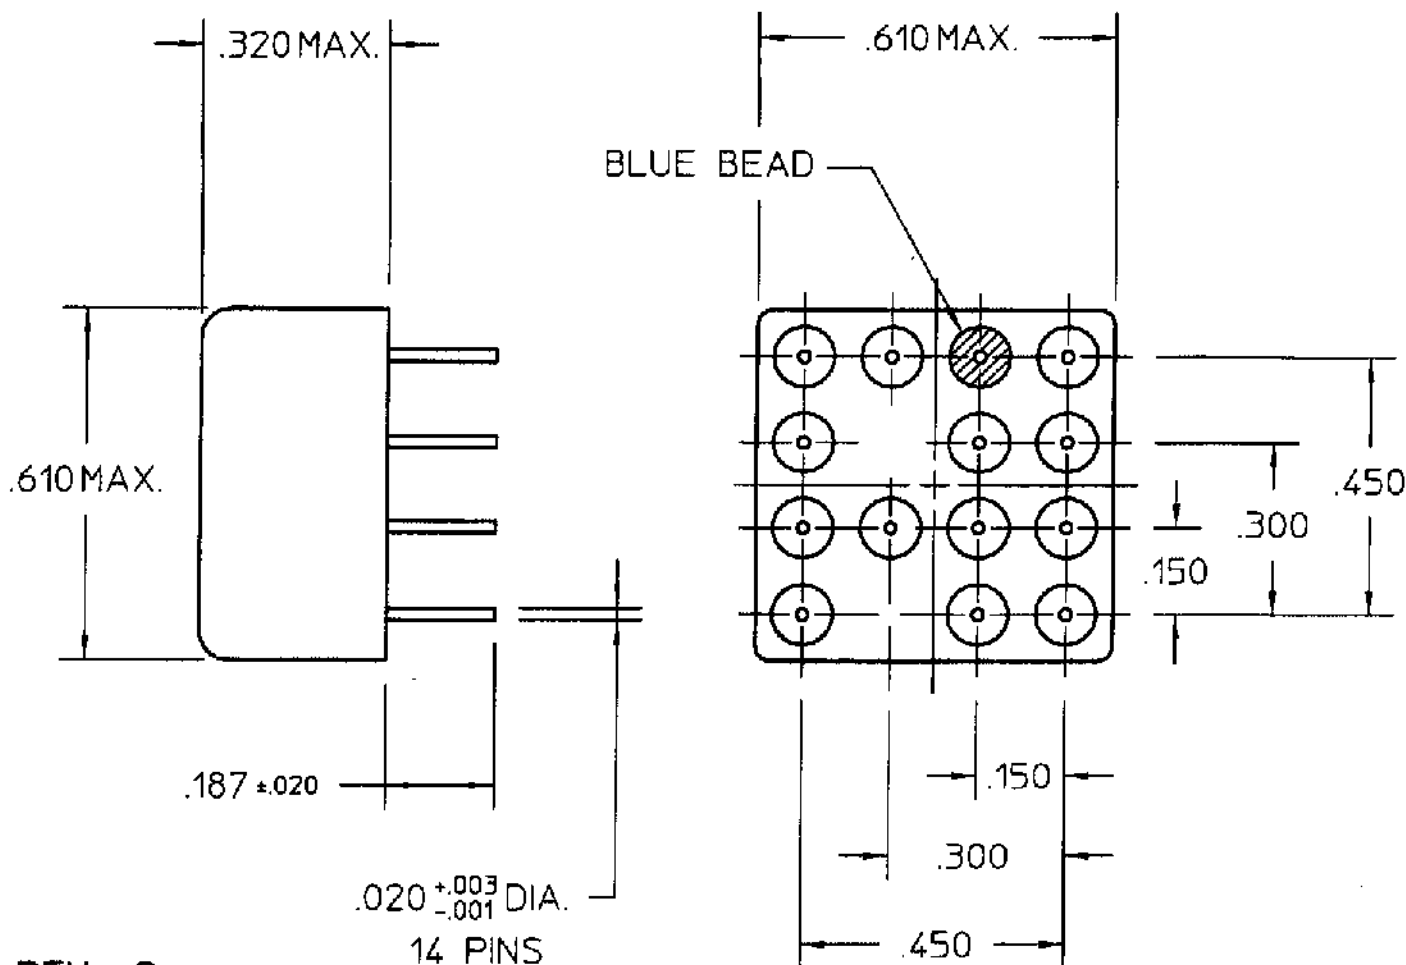

REV. 2
DCO 142664


COIL: @ 25°C
 RESISTANCE 720 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
 RELEASE 6 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

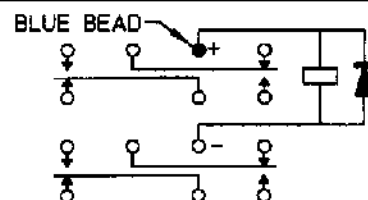

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. PBB 5-3-00

CK.



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/53-012M REV.

3SBH RELAY

3SBH1231A2