

## Heyco® Ergonomic Plugs for Square Tubing

### PSTE Series - Vinyl for Greater Flexibility

| TUBE DIMENSIONS |         |      |      |               | PART NO. | DESCRIPTION  | PART DIMENSIONS |                   |       |      |  |
|-----------------|---------|------|------|---------------|----------|--------------|-----------------|-------------------|-------|------|--|
| Inside          |         |      |      | Typical Gauge |          |              | Black           | A                 |       | B    |  |
| Dimension Range |         |      |      |               |          |              |                 | Outside Dimension | Depth |      |  |
| Minimum         | Maximum |      |      |               |          |              |                 |                   |       |      |  |
| in.             | mm.     | in.  | mm.  |               |          |              | in.             | mm.               | in.   | mm.  |  |
| .58             | 14,7    | .68  | 17,3 | 14 - 20       | G5320    | PST E-75-14  | .75             | 19,1              | .43   | 10,9 |  |
| .73             | 18,5    | .83  | 21,1 | 10 - 14       | G5321    | PST E-100-10 | 1.00            | 25,4              |       |      |  |
| .83             | 21,1    | .93  | 23,6 | 14 - 20       | G5322    | PST E-100-14 |                 |                   |       |      |  |
| 1.08            | 27,4    | 1.18 | 30,0 | 14 - 20       | G5323    | PST E-125-14 | 1.25            | 31,8              | .52   | 13,2 |  |
| 1.23            | 31,2    | 1.33 | 33,8 | 10 - 14       | G5324    | PST E-150-10 | 1.50            | 38,1              |       |      |  |
| 1.33            | 33,8    | 1.43 | 36,3 | 14 - 20       | G5325    | PST E-150-14 |                 |                   |       |      |  |
| 1.73            | 43,9    | 1.83 | 46,5 | 14 - 20       | G5326    | PST E-200-10 | 2.00            | 50,8              |       |      |  |

Standard color black.

## Heyco® Plugs for Rectangular Tubing

### PZT Series - Ribbed Fit

| TUBE DIMENSIONS    |      |             |         |                |                | PART NO. | DESCRIPTION     | PLUG  |                 |      |
|--------------------|------|-------------|---------|----------------|----------------|----------|-----------------|-------|-----------------|------|
| Outside Dimensions |      |             |         | Wall Thickness | Typical Gauge  |          |                 | Black | Depth C         |      |
| A                  |      | B           |         |                |                |          |                 |       | in.             | in.  |
| in.                | mm.  | in.         | mm.     | in.            |                |          |                 | in.   | mm.             |      |
| .50                | 12,7 | 1.00        | 25,4    | .065 - .049    | 16 - 18        | G5330    | PZT 50-100-16   | .43   | 10,9            |      |
|                    |      | 1.50        | 38,1    | .083 - .035    | 14 - 20        | G5331    | PZT 50-150-14   | .50   | 12,7            |      |
| .63                | 15,9 | 1.12        | 28,6    | .083 - .035    | 14 - 20        | G5332    | PZT 63-112-14   | .43   | 10,9            |      |
|                    |      | 1.25        | 31,8    | .083           | 14             | G5334    | PZT 63-125-14   | .50   | 12,7            |      |
|                    |      | 1.38        | 34,9    | .083 - .035    | 14 - 20        | G5335    | PZT 63-138-14   | .43   | 10,9            |      |
| .75                | 19,1 | 1.50        | 38,1    | .083 - .035    | 14 - 20        | G5336    | PZT 75-150-14   | .43   | 10,9            |      |
| 1.00               | 25,4 | 1.25        | 31,8    | .083 - .035    | 14 - 20        | G5337    | PZT 100-125-14  | .50   | 12,7            |      |
|                    |      | 1.50        | 38,1    | .134 - .083    | 10 - 14        | G5338    | PZT 100-150-10  |       |                 |      |
|                    |      |             |         | .083 - .035    | 14 - 20        | G5339    | PZT 100-150-14  |       |                 |      |
|                    |      | 2.00        | 50,8    | .134 - .083    | 10 - 14        | G5340    | PZT 100-200-10  |       |                 |      |
|                    |      |             |         | .083 - .035    | 14 - 20        | G5341    | PZT 100-200-14* |       |                 |      |
|                    |      |             |         | .065           | 16             | G5342    | PZT 100-200-16  | .36   | 9,1             |      |
|                    |      | 2.50        | 63,5    | .083 - .035    | 14 - 20        | G5343    | PZT 100-250-14  | .45   | 11,4            |      |
|                    |      |             |         | .065 - .049    | 16 - 18        | G5344    | PZT 100-250-16  | .50   | 12,7            |      |
| 3.00               | 76,2 | .083 - .035 | 14 - 20 | G5345          | PZT 100-300-14 | .51      | 13,0            |       |                 |      |
| 1.50               | 38,1 | 2.00        | 50,8    | .134 - .083    | 10 - 14        | G5346    | PZT 150-200-10  | .50   | 12,7            |      |
|                    |      | 2.50        | 63,5    | .109 - .065    | 12 - 16        | G5347    | PZT 150-250-12  | .53   | 13,5            |      |
|                    |      | 3.00        | 76,2    | .134 - .083    | 10 - 14        | G5348    | PZT 150-300-10  | .50   | 12,7            |      |
|                    |      | 3.50        | 88,9    | .134 - .083    | 10 - 14        | G5349    | PZT 150-350-10  | .60   | 15,2            |      |
| 1.96               | 49,8 | 3.94        | 100,1   | .203 - .109    | 6 - 12         | G5356    | PZT 196-394-06M | .65   | 16,5            |      |
| 2.00               | 50,8 | 2.50        | 63,5    | .134 - .083    | 10 - 14        | G5351    | PZT 200-250-10  | .52   | 13,2            |      |
|                    |      | 3.00        | 76,2    | .203 - .165    | 6 - 8          | G5352    | PZT 200-300-06  |       |                 |      |
|                    |      |             |         | .134 - .083    | 10 - 14        | G5353    | PZT 200-300-10  |       |                 |      |
|                    |      |             |         | .083 - .035    | 14 - 20        | G5354    | PZT 200-300-14  | .50   | 12,7            |      |
|                    |      |             |         | .203 - .120    | 6 - 11         | G5355    | PZT 200-400-06  | .94   | 23,9            |      |
|                    |      | 4.00        | 101,6   | .134 - .083    | 10 - 14        | G5357    | PZT 200-400-10  | .50   | 12,7            |      |
|                    |      |             |         | .083 - .035    | 14 - 20        | G5358    | PZT 200-400-14  |       |                 |      |
|                    |      |             |         | 5.00           | 127,0          | .165     | 8               | G5359 | PZT 200-500-08* | 1.00 |
|                    |      |             |         | .134           | 10             | G5360    | PZT 200-500-10* |       |                 |      |


Standard color black.

\*Smooth (ie, not ribbed) shank.

|                   |                                          |                   |                                  |
|-------------------|------------------------------------------|-------------------|----------------------------------|
| Material          | PSTE                                     | Material          | LDPE                             |
| Temperature Range | Vinyl<br>26°F (-32°C) to<br>200°F (93°C) | Temperature Range | -94°F (-70°C) to<br>150°F (66°C) |



- **Flexible, ribbed design** allows quick and easy fingertip installation.
- **Removable without the use of tools** (Traditional glides and tube plugs are designed to be permanent. Their rigid design makes removal very difficult).
- Injection molded for intricate detail and design, with **flexibility**.
- See page 6-50 for HEYCaps and Plugs for Round Tubing.
- Material: Vinyl. Vinyl **decreases mobility** or sliding on floors, helping to keep your application in place.

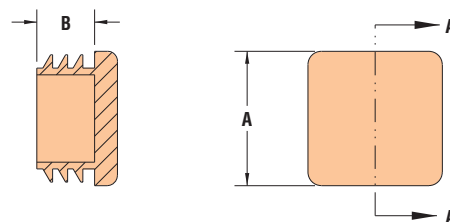

- Featuring the same external rib design of Heyco PSTR Series Plugs for Square Tubing, PZT Series Plugs for Rectangular Tubing are offered in a **broad selection of width-to-length proportions**, to fit many special tubing shapes found on stands for computer terminals, office machines, display fixtures, and similar metal furnishings and equipment.
- **Durable construction** ensures exceptional performance in business and commercial applications.

