



## Heyco® Ergonomic Plugs for Square Tubing

### PSTE Series - Vinyl for Greater Flexibility

TUBE DIMENSIONS Inside					PART NO.	DESCRIPTION	PART DIMENSIONS			
Dimension Range		Typical Gauge	A				B			
Minimum	Maximum		Outside Dimension				Depth			
in.	mm.	in.	mm.		Black	in.	mm.	in.	mm.	
.58	14,7	.68	17,3	14 - 20	<b>G5320</b>	PST E-75-14	.75	19,1	.43	10,9
.73	18,5	.83	21,1	10 - 14	<b>G5321</b>	PST E-100-10	1.00	25,4		
.83	21,1	.93	23,6	14 - 20	<b>G5322</b>	PST E-100-14			1.25	31,8
1.08	27,4	1.18	30,0	14 - 20	<b>G5323</b>	PST E-125-14				
1.23	31,2	1.33	33,8	10 - 14	<b>G5324</b>	PST E-150-10				
1.33	33,8	1.43	36,3	14 - 20	<b>G5325</b>	PST E-150-14	1.50	38,1		
1.73	43,9	1.83	46,5	14 - 20	<b>G5326</b>	PST E-200-10			2.00	50,8

Standard color black.

## Heyco® Plugs for Rectangular Tubing

### PZT Series - Ribbed Fit

TUBE DIMENSIONS					PART NO.	DESCRIPTION	PLUG Depth C		
Outside Dimensions		Wall Thickness	Typical Gauge	Black			in.	mm.	
A	B								
in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.50	12,7	1.00	25,4	.065 - .049	16 - 18	<b>G5330</b>	PZT 50-100-16	.43	10,9
		1.50	38,1	.083 - .035	14 - 20	<b>G5331</b>	PZT 50-150-14	.50	12,7
.63	15,9	1.12	28,6	.083 - .035	14 - 20	<b>G5332</b>	PZT 63-112-14	.43	10,9
		1.25	31,8	.083	14	<b>G5334</b>	PZT 63-125-14	.50	12,7
		1.38	34,9	.083 - .035	14 - 20	<b>G5335</b>	PZT 63-138-14	.43	10,9
.75	19,1	1.50	38,1	.083 - .035	14 - 20	<b>G5336</b>	PZT 75-150-14	.43	10,9
1.00	25,4	1.25	31,8	.083 - .035	14 - 20	<b>G5337</b>	PZT 100-125-14	.50	12,7
		1.50	38,1	.134 - .083	10 - 14	<b>G5338</b>	PZT 100-150-10		
		2.00	50,8	.083 - .035	14 - 20	<b>G5339</b>	PZT 100-150-14	.36	9,1
				.134 - .083	10 - 14	<b>G5340</b>	PZT 100-200-10		
		2.50	63,5	.083 - .035	14 - 20	<b>G5341</b>	PZT 100-200-14*	.45	11,4
				.065	16	<b>G5342</b>	PZT 100-200-16		
1.50	38,1	2.00	50,8	.083 - .035	14 - 20	<b>G5343</b>	PZT 100-250-14	.50	12,7
		2.50	63,5	.065 - .049	16 - 18	<b>G5344</b>	PZT 100-250-16	.50	12,7
		3.00	76,2	.083 - .035	14 - 20	<b>G5345</b>	PZT 100-300-14	.51	13,0
1.96	49,8	2.00	50,8	.134 - .083	10 - 14	<b>G5346</b>	PZT 150-200-10	.50	12,7
		2.50	63,5	.109 - .065	12 - 16	<b>G5347</b>	PZT 150-250-12	.53	13,5
		3.00	76,2	.134 - .083	10 - 14	<b>G5348</b>	PZT 150-300-10	.50	12,7
		3.50	88,9	.134 - .083	10 - 14	<b>G5349</b>	PZT 150-350-10	.60	15,2
2.00	50,8	3.94	100,1	.203 - .109	6 - 12	<b>G5356</b>	PZT 196-394-06M	.65	16,5
2.00	50,8	2.50	63,5	.134 - .083	10 - 14	<b>G5351</b>	PZT 200-250-10	.52	13,2
		3.00	76,2	.203 - .165	6 - 8	<b>G5352</b>	PZT 200-300-06		
				.134 - .083	10 - 14	<b>G5353</b>	PZT 200-300-10		
		4.00	101,6	.083 - .035	14 - 20	<b>G5354</b>	PZT 200-300-14	.50	12,7
				.203 - .120	6 - 11	<b>G5355</b>	PZT 200-400-06	.94	23,9
				.134 - .083	10 - 14	<b>G5357</b>	PZT 200-400-10	.50	12,7
.083 - .035	14 - 20	<b>G5358</b>	PZT 200-400-14						
5.00	127,0	.165	8	<b>G5359</b>	PZT 200-500-08*	1.00	25,4		
		.134	10	<b>G5360</b>	PZT 200-500-10*				


Standard color black.

\*Smooth (ie, not ribbed) shank.

Material	PSTE	Material	LDPE
Temperature Range	Vinyl 26°F (-32°C) to 200°F (93°C)	Temperature Range	-94°F (-70°C) to 150°F (66°C)



- **Flexible, ribbed design** allows quick and easy fingertip installation.
- **Removable without the use of tools** (Traditional glides and tube plugs are designed to be permanent. Their rigid design makes removal very difficult).
- Injection molded for intricate detail and design, with **flexibility**.
- See page 6-50 for HEYCaps and Plugs for Round Tubing.
- Material: Vinyl. Vinyl **decreases mobility** or sliding on floors, helping to keep your application in place.

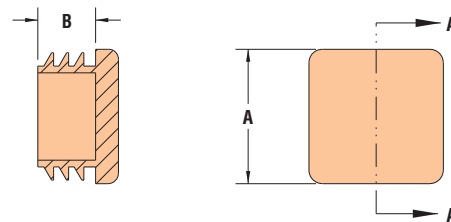

- Featuring the same external rib design of Heyco PSTR Series Plugs for Square Tubing, PZT Series Plugs for Rectangular Tubing are offered in a **broad selection of width-to-length proportions**, to fit many special tubing shapes found on stands for computer terminals, office machines, display fixtures, and similar metal furnishings and equipment.
- **Durable construction** ensures exceptional performance in business and commercial applications.

