

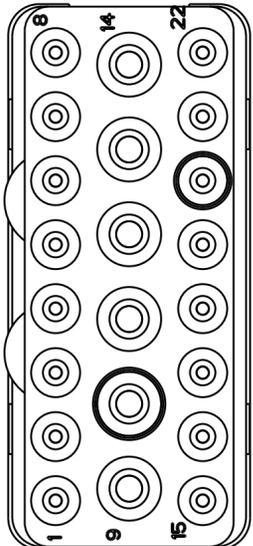
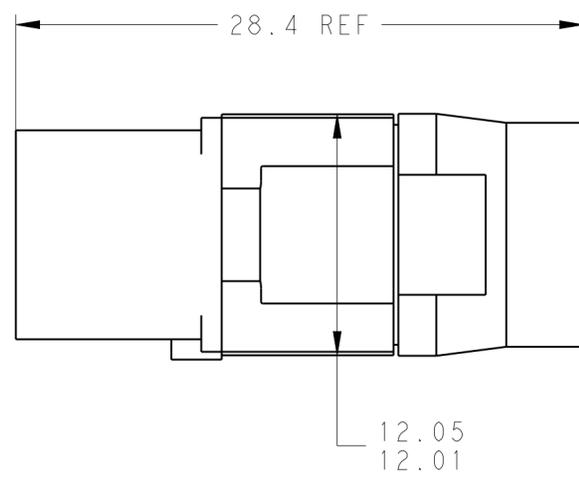


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY - ALL RIGHTS RESERVED.

REVISIONS						
LOC	DIST	P	LTR	DESCRIPTION	DATE	APVD
-	-		B	REVISED PER ECO-12-018187	2NOV2012	CT KH

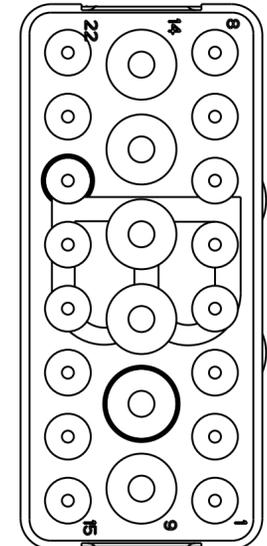

MATING FACE

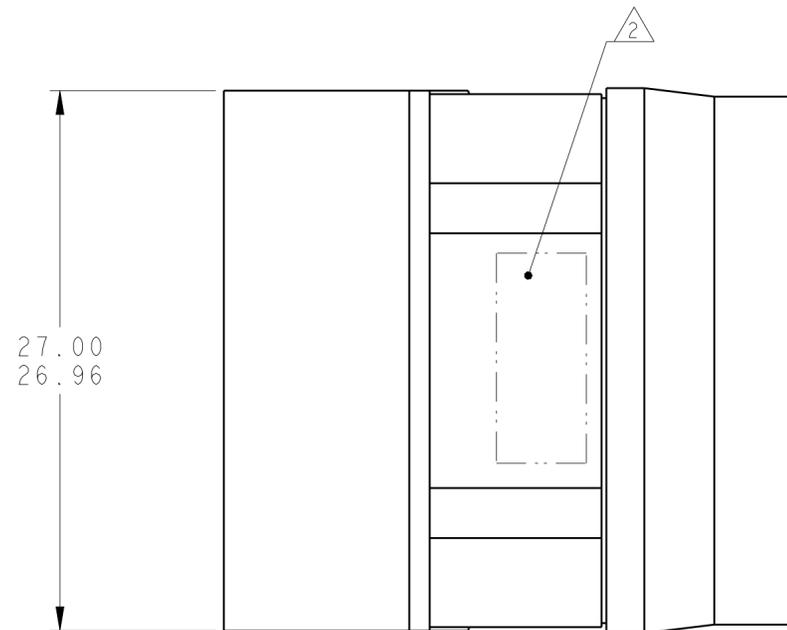

THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

1 FRONT & REAR INSULATORS: HIGH-TEMP THERMOPLASTIC OR THERMOSET EPOXY PER ASTM D5948.
 CONTACT RETENTION CLIPS: STAINLESS STEEL PER AISI 302 OR COPPER ALLOY PER ASTM B194
 REAR GROMMET: FLUOROSILICONE ELASTOMER PER MIL-R-25988 B EXCEPT 4.6.6.1.

2 PART TO MARKED WITH TE IDENTIFICATION, TE PART NO.
 AND DATE CODE: YEAR & WEEK (YY WW) IN APPROXIMATE AREA SHOWN.

3. THIS INSERT CONTAINS: 16 CAVITIES FOR SIZE 20 SOCKET CONTACTS
 6 CAVITIES FOR SIZE 16 SOCKET CONTACTS

4. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALL SA.

NON-ENV	GPRBN22SB	1738154-2
ENVIRONMENTAL	GPRBE22SB	1738154-1
REMARKS	DESCRIPTIVE PART NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 10-8-10	TE Connectivity			
DIMENSIONS:		CHK K. HOGAN 10-8-10				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. HOGAN 10-8-10				
mm		PRODUCT SPEC				
		APPLIC. SPEC	NAME INSERT ASSEMBLY, SOCKET, ARRANGEMENT 22, KEY B, GPRB			
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO.	RESTRICTED TO
		-	A200779	C-1738154	-	-
CUSTOMER DRAWING			SCALE	SHEET	OF	REV
			4:1	1	1	B