
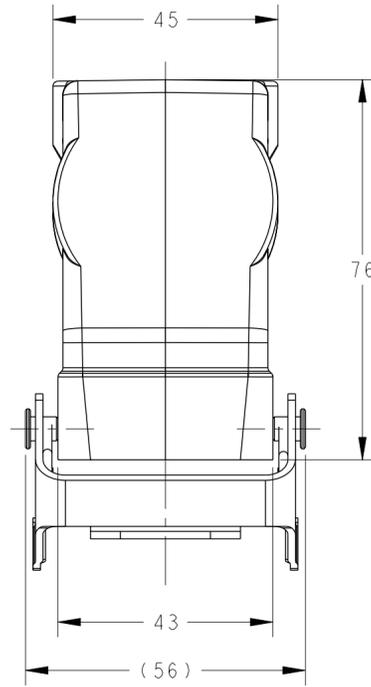




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	INITIAL	06JUN2015	DW CW

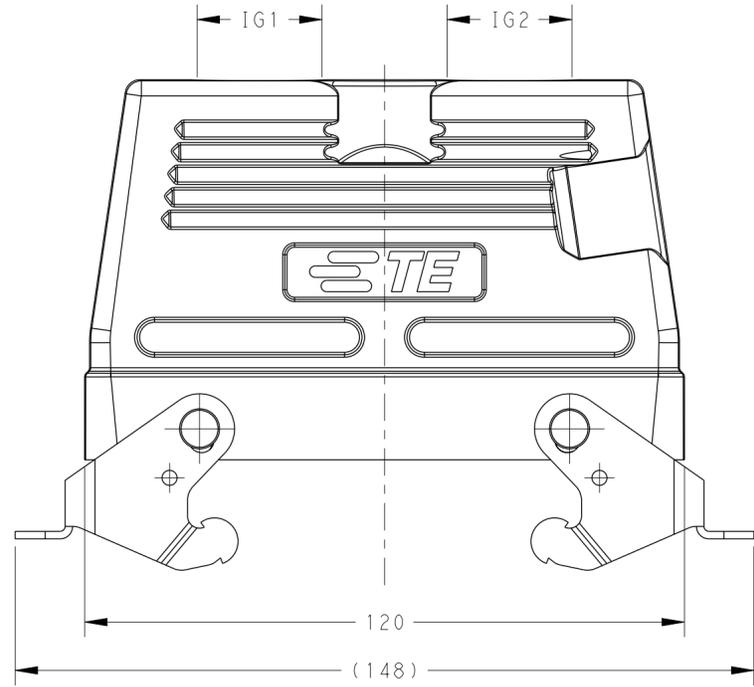

NOTES:  
 1. TECHNICAL CHARACTERISTICS:  
 HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY  
 SURFACE: POWDER COATED, GREY  
 OPERATION TEMPERATURE: -40-+125°C  
 DEGREE OF PROTECTION: IP65 (MATED)

注释:  
 1. 技术参数:  
 上壳材料: 铝合金  
 表面处理: 粉末涂层, 灰色  
 工作温度: -40-+125°C  
 防护等级: IP65(配合)

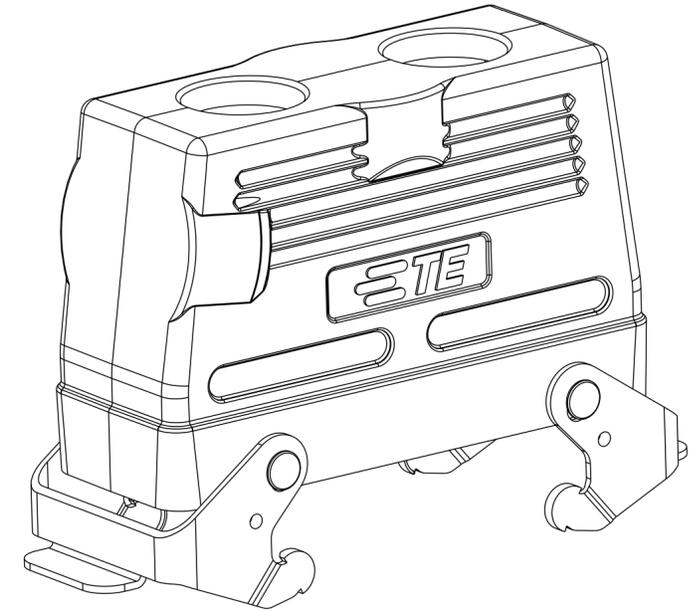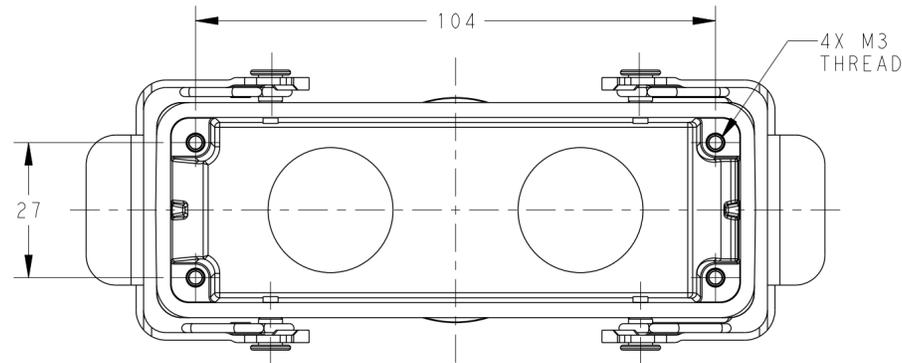

T1280240921-000	H24B-TGBH-PG9/PG21	HIGH CONSTRUCTION	PG9	PG21
T1280242120-000	H24B-TGBH-M20/PG21		M20	PG21
T1280242221-000	H24B-TGBH-2PG21		PG21	PG21
T1280242225-000	H24B-TGBH-2M25		M25	M25
T1280242921-000	H24B-TGBH-PG29/PG21		PG21	PG29
PART NUMBER	DESCRIPTION	TYPE	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 06JUN2015 David Wang	<b>STE</b> TE Connectivity	
		CHK 06JUN2015 Chris Wang		
DIMENSIONS: mm		APVD 06JUN2015 Xiang Xu	NAME H24B-TGBH-M/PG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-137013	RESTRICTED TO	
0 PLC ±		APPLICATION SPEC 114-137013	SIZE A200779	CAGE CODE C-T128024XXXX000
1 PLC ±		WEIGHT -	SCALE 1:1	SHEET 1 OF 1
2 PLC ±		Customer Drawing	REV A	
3 PLC ±				
4 PLC ±				
ANGLES ±				
FINISH -				