



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

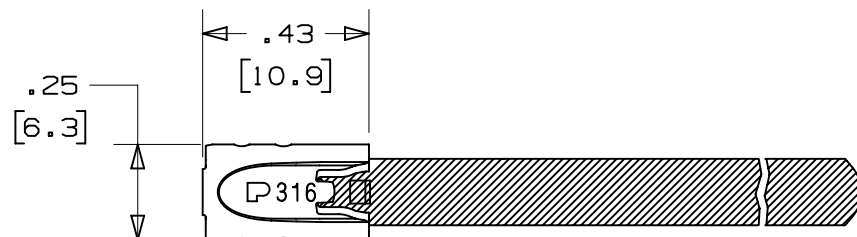


.17 ± .030
[4.3 ± 0.8]

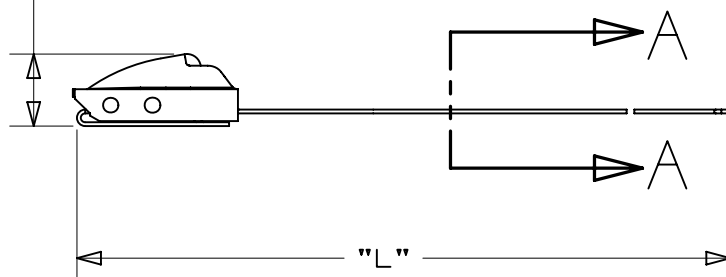

NOTES:

- 1.) APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 100 LBS. (445 NEWTONS)
WHEN TESTED ON A 1.5" MANDREL.
- 3.) BRACKETS [] DENOTES DIMENSION IN MILLIMETERS, AND
ARE FOR REFERENCE ONLY
- 4.) TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
- 5.) MATERIAL: 316 STAINLESS STEEL
- 6.) COATING - POLYESTER
COATING THICKNESS: .002 MIN./ .005 MAX.PER SIDE

PANDUIT PART NO.	MAX BUNDLE DIA.	PACKAGE QTY	LENGTH L ±.3 [7]
MLTFC1.5S-CP316	1.5" [38]	100	6.2" [157]
MLTFC2.5S-CP316	2.5" [64]	100	9.2" [234]
MLTFC3.4S-CP316	3.4" [86]	100	12.2" [310]
MLTFC5.4S-CP316	5.4" [137]	100	18.2" [462]

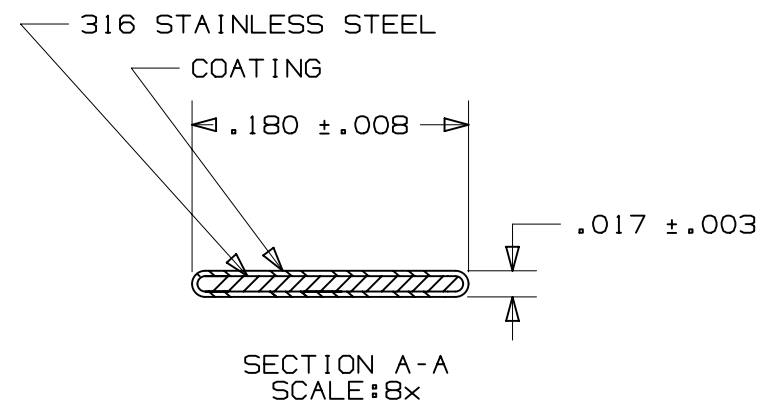

TITLE

METAL LOCKING TIE - COATED STANDARD SERIES

CUSTOMER DRAWING

ITEM REVISION NAME

N41273BS/02

DATASET FILE NAME

N41273BS/02


UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54]

.xxx ± .005 [.127]

.xx ± .01 [.25]

ANGLES ± 5 °



THIRD ANGLE
PROJECTION

MATERIAL:

316 STAINLESS STEEL

DRAWING NUMBER:

N41273BS_DC

02 02.24.15 BDK SKB RGR0 UPDATED TITLE BLOCK AND BORDER

N41273BS_DC

REV DATE BY CHK APR DESCRIPTION

ECN

DRAWN BY

DATE

02.24.15

CHK

EJD

SCALE

2:1

SHT 1 OF 1

SIZE

A