

4







3

2

1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 20		ALL RIGHTS RESERVED.	


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	05JUL2015	DL	CW

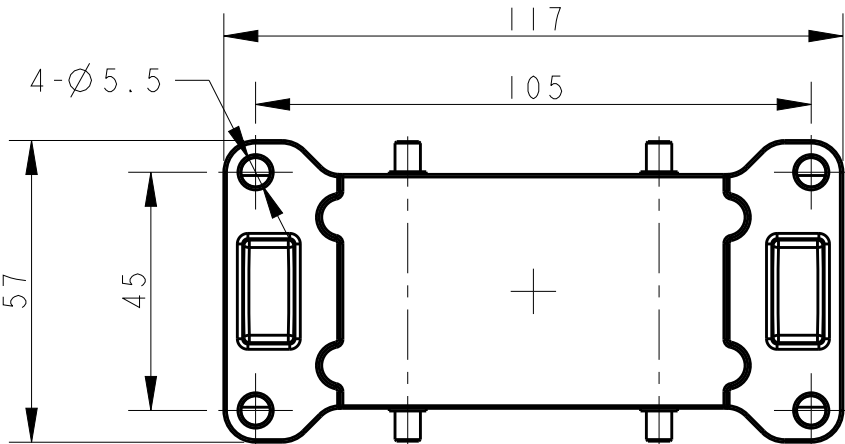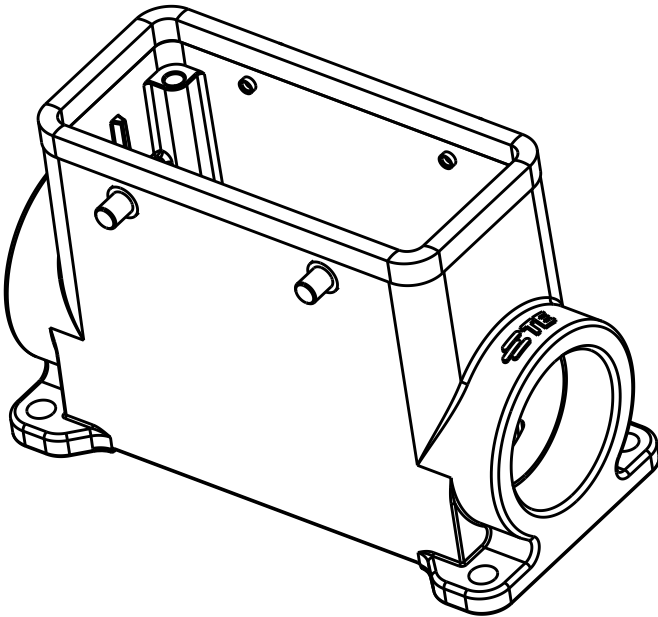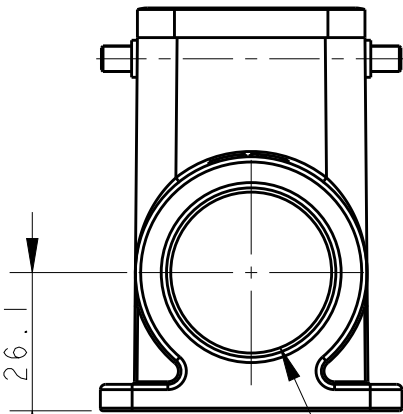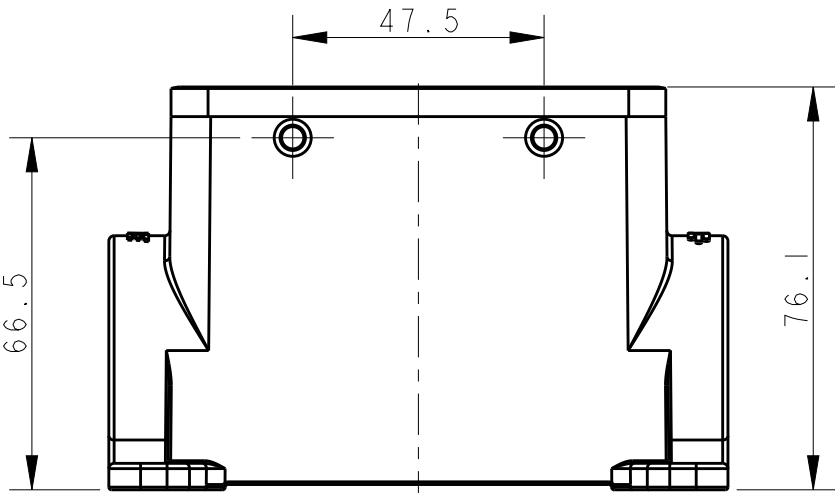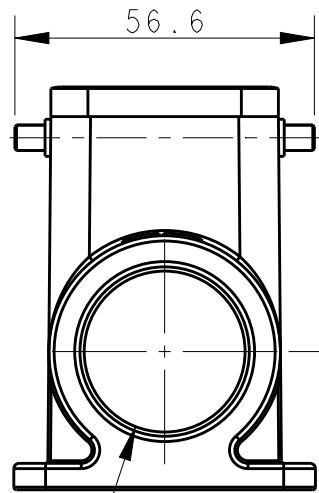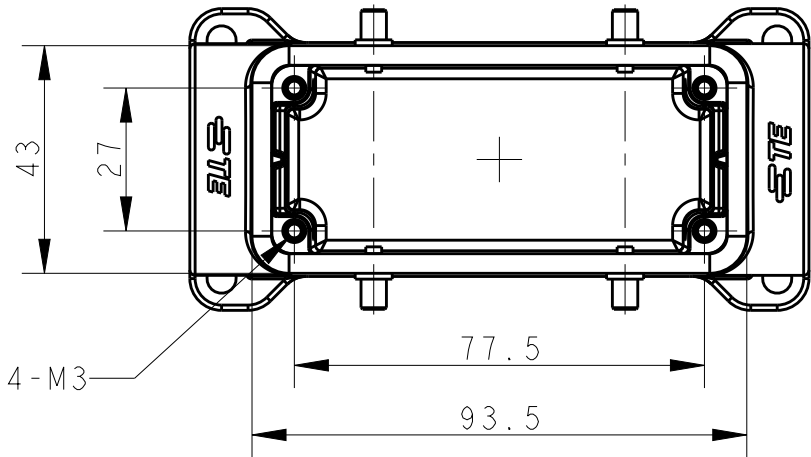

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

T1480160232-000	H16B-SGRH-BO-2M32	M32	M32
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 05JUL2015		 TE Connectivity			
		CHK CHRIS WANG 05JUL2015					
DIMENSIONS: mm		APVD XU XIANG 05JUL2015		NAME H16B-SGRH-BO-2M32			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-137013			
		0 PLC ±-		APPLICATION SPEC 114-137013			
		1 PLC ±-		SIZE A3			
		2 PLC ±-		CAGE CODE -			
		3 PLC ±-		DRAWING NO C-T1480160232000			
		4 PLC ±-		RESTRICTED TO -			
MATERIAL TBD		FINISH -		WEIGHT -			
		-		CUSTOMER DRAWING			
				SCALE 7:10		SHEET 1 OF 1	
						REV A	