
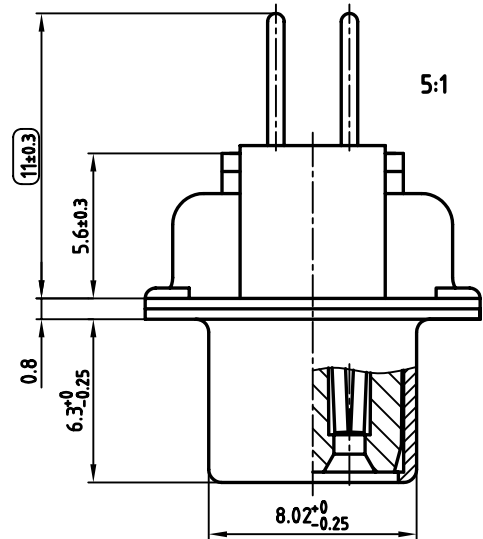

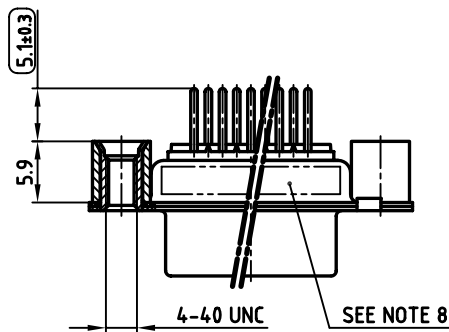


used for: D-SUB

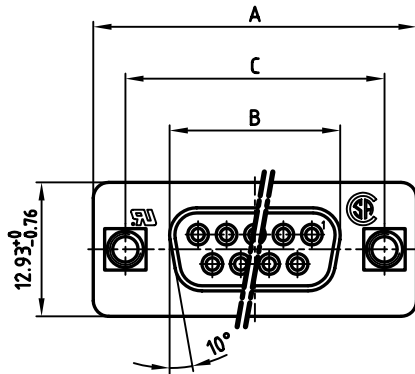

No. of Pos.	A -0.76	B -0.25	C	Part No.
9	31.19	16.46	25.00 +0.12/-0.13	164A12029X
15	39.52	24.79	33.30 +0.15/-0.1	164A12039X
25	53.42	38.50	47.04 ±0.13	164A12049X
37	69.70	54.96	63.50 ±0.13	164A12059X

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED REAR SPACER: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- SLEEVE: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		 dim. in mm
2005	date	
drawn	09.06.	name
appd.	09.06.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB FEMALE 9-37pos. SOLDER PIN STRAIGHT with threaded rear spacer	
dwg no:	AutoCAD 2004	DIN-A
	16K2A904	3
part no:	SEE TABLE	
		sh:1/2

