


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT copyright.d8te ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	INITIAL RELEASE	08FEB2018	GY CW

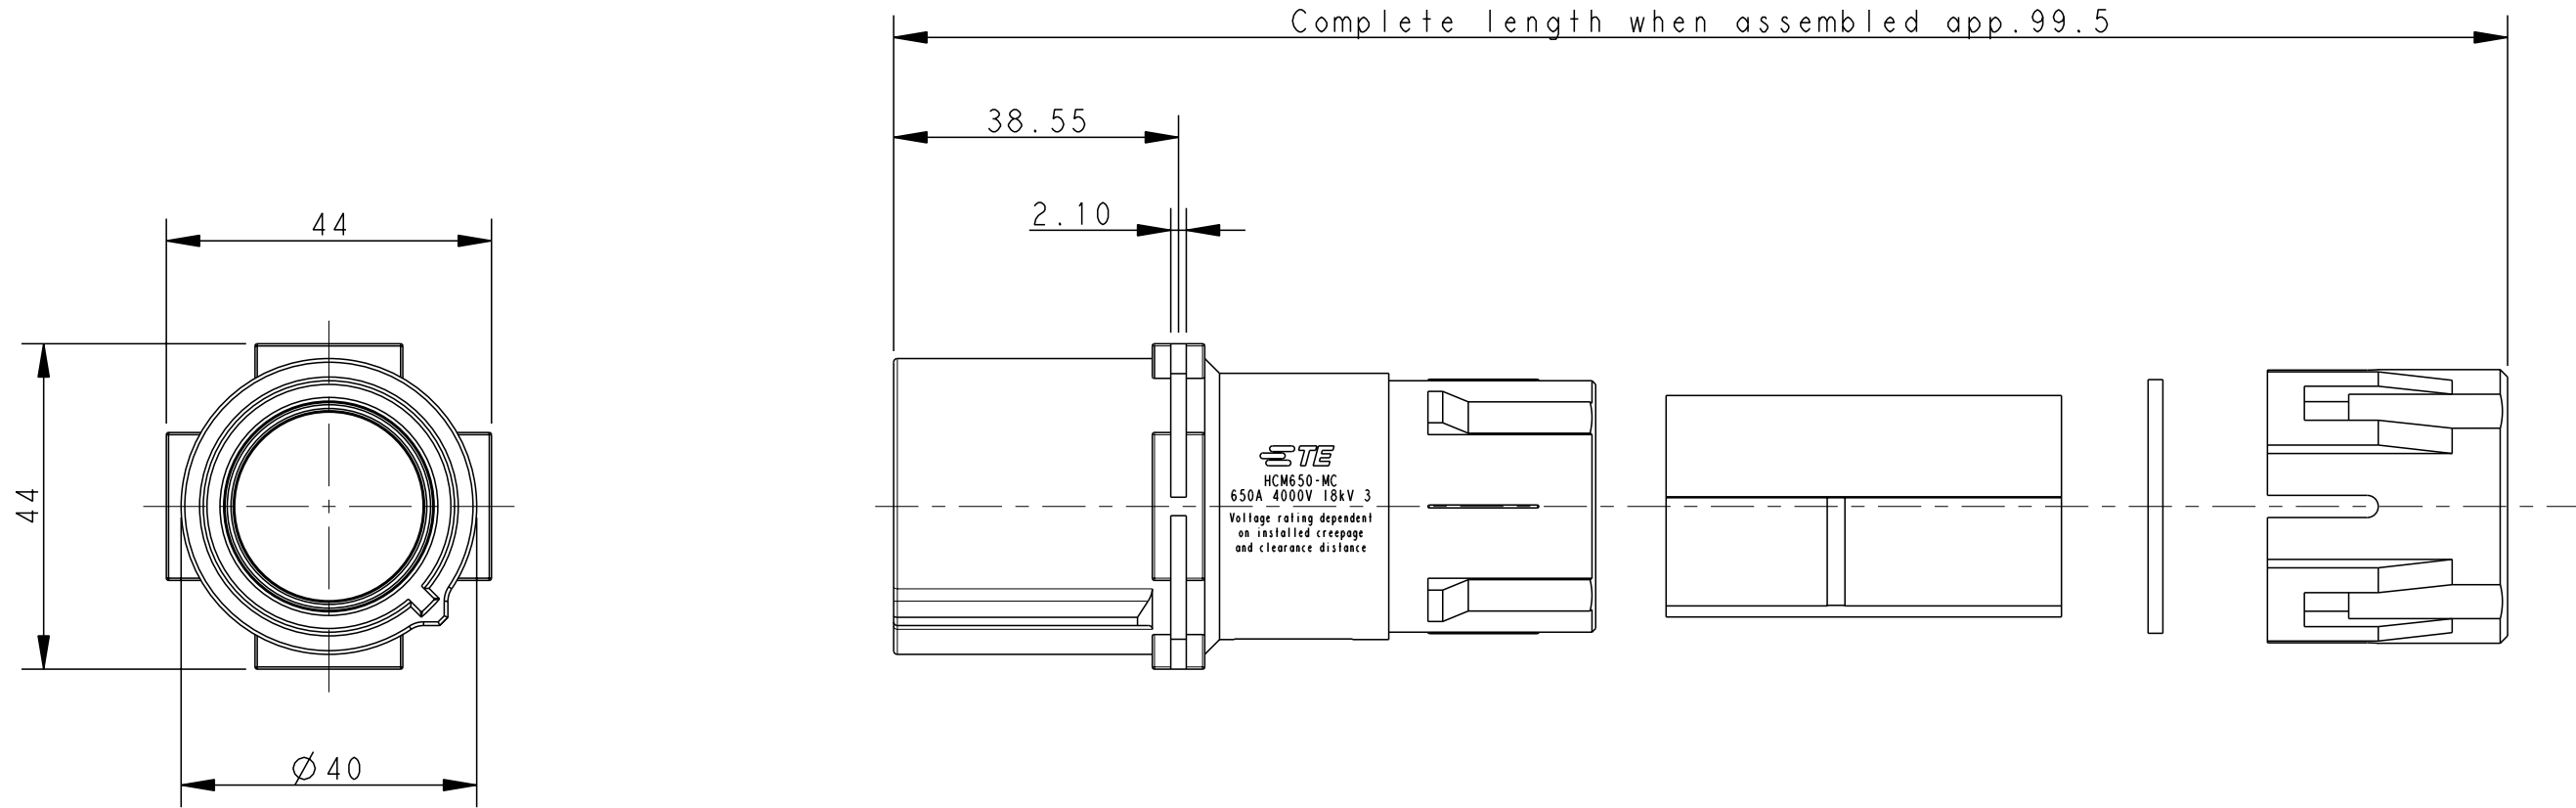


NOTES:

- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PA
 RATED VOLTAGE: 4000V
 RATED CURRENT: 650A
 RATED IMPULSE VOLTAGE: 18KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 WIRE RANGE: 70-240 mm²
 CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
 (ORDER No. REFER TO DRAWING:T2196501XXX00X)

注释:

- 技术参数:
 绝缘材料: PA
 额定电压: 4000V
 额定电流: 650A
 额定脉冲电压: 18KV
 污染等级: 3
 阻燃等级: UL94V-0
 接线范围: 70-240 mm²
 接线类型: 冷压接
- 端子需要单独订购。
 (订货号参考图面: T2196501XXX00X)

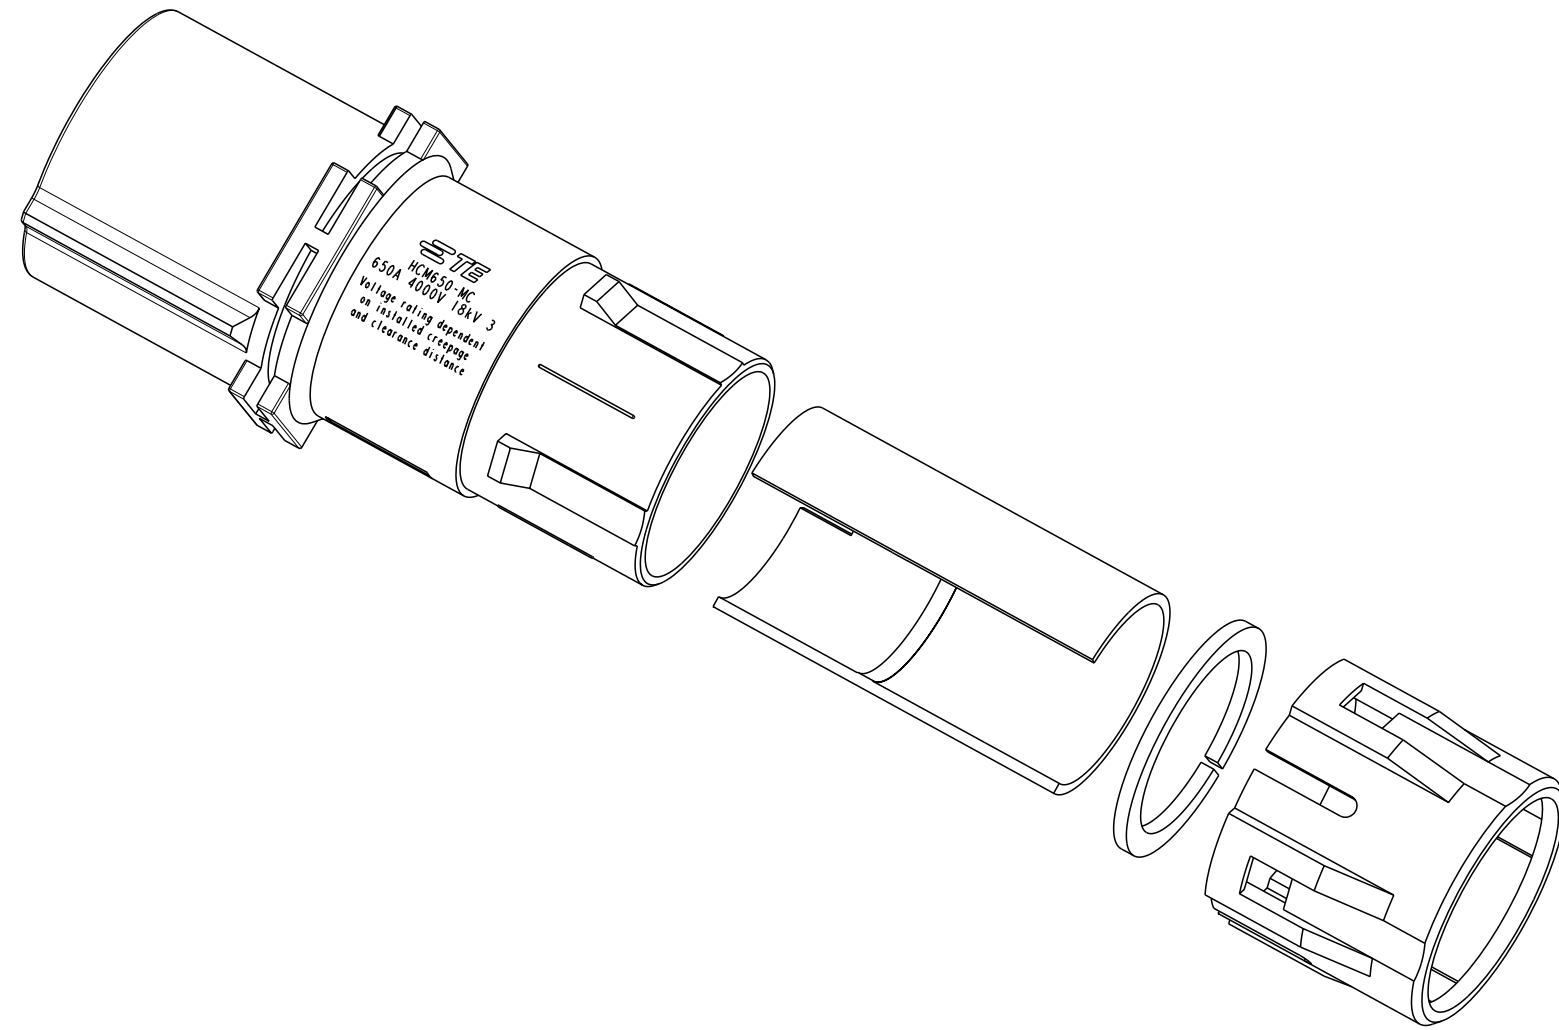

T2196503101-000	HCM650-MC	HCM650 MALE INSERT, CRIMP HCM650 公插, 冷压
PART NUMBER 零件料号	PART DESCRIPTION 零件描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO.YAO 30 JAN 2018	TE Connectivity			
		CHK CHRIS.WANG 30 JAN 2018				
		APVD CHRIS.WANG 30 JAN 2018				
		NAME HCM650-MC				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-137074	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	0 PLC ±-	APPLICATION SPEC 114-137074	A2	00779	C-T2196503101000	-
	1 PLC ±-	WEIGHT	SCALE 1:1		SHEET 1 OF 1	REV A
	2 PLC ±-	CUSTOMER DRAWING				
	3 PLC ±-					
	4 PLC ±-					
	ANGLES ±-					
	FINISH					