





REV.	ECN NO.	DATE	SIGN	DESCRIPTION




⑤ Sealing Nut




④ Clamp Ring






③ Seals B2



② Seals B1

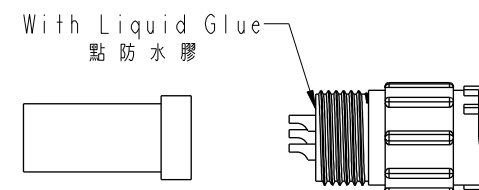

① Connector

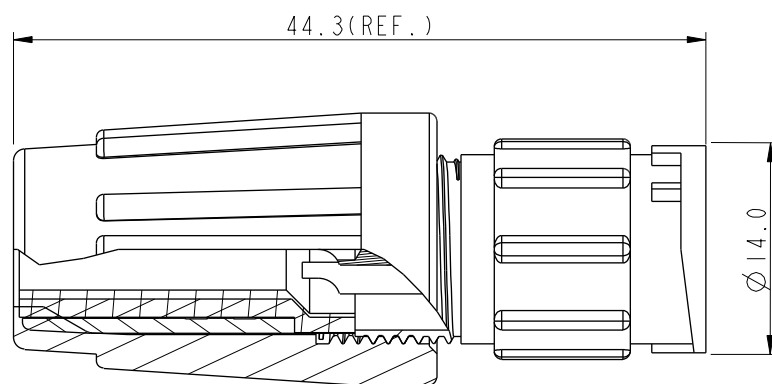Pin Assignments
Front View 前視圖

Note:

- * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * ⓐ Important Dimension.
- * Waterproof Rate : IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Seals: Black, EPDM
- * Clamping Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * PE Bag: 90mm*85mm
- * Liquid Glue: Clear

UNIT: mm		TITILE		ITEM NO		DRAWN BY		DATE	
		Standard, Assy Lock 5Pin M Conn M Pin		BD-05BMMA-LL6001		SamChang		2012-03-21	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ± 0.25		1:1		BD-05BMMA-LL6001		Jeffrey		2012-03-29	
.XX ± 0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ± 0.05		A4		ALTW		Kevin		2012-03-29	
ANGLES $\pm 1^\circ$		REV.		SHEET		OF		FMM10702-01-02A1	
		A		1		1			
		WC-REV.		QC		Inspection item			
		A.2							

Amphenol LTW
安費諾亮泰企業股份有限公司