
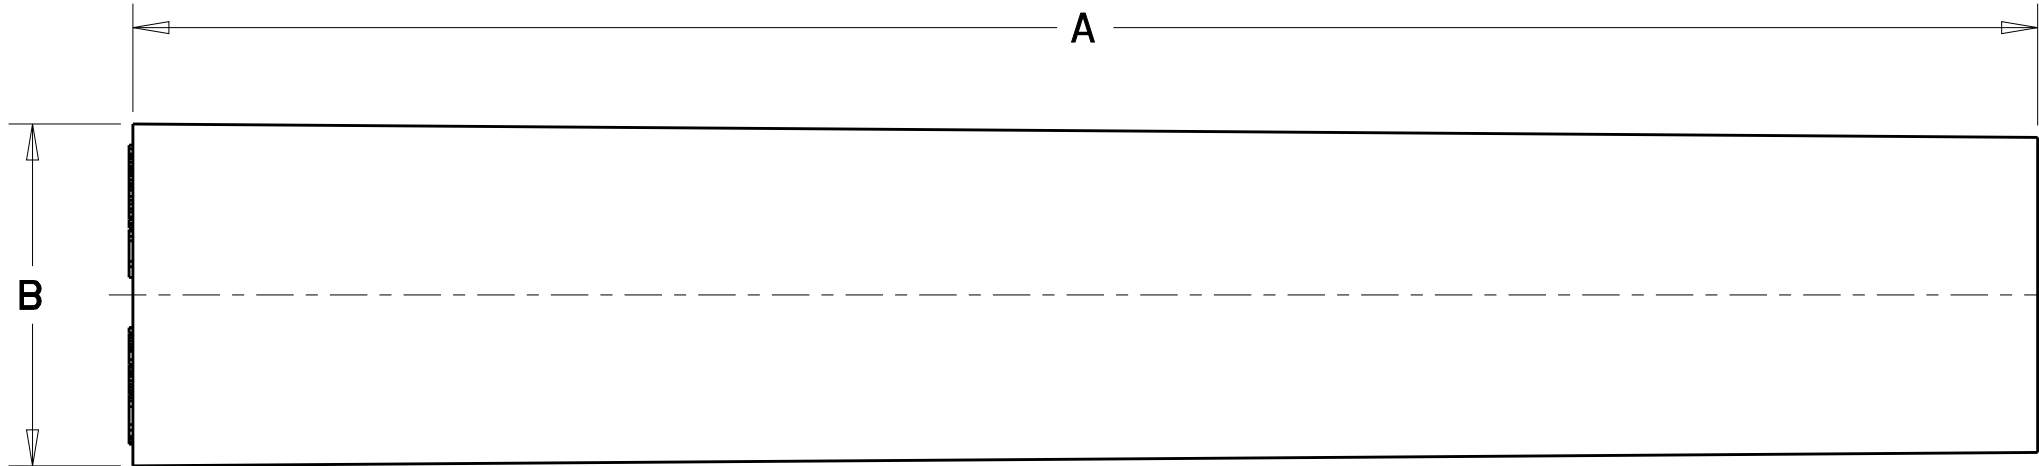


PART NUMBER	A ±.100	B MAX
JS-16-00	2.465 [62.61]	.385 [9.78]
JS-12-00	2.500 [63.50]	.500 [12.70]
JS-04-00	3.437 [87.30]	.765 [19.43]

	E	REDRAWN-REVISED PER E.O. P15306	12JUN1997	DM	AY
	F	REVISED PER E.O. P20435	22FEB2010	JA	RDR
	G	REVISED PER E.O. P20841	09MAR2011	JA	RDR
	H	REVISED PER ECO-16-007298	12MAY2016	JA	DM

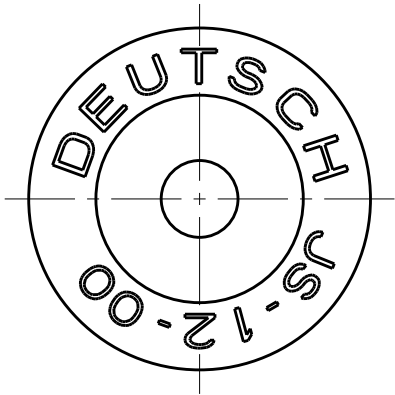

TE INTERNAL PN	DEUTSCH PN
JS-16-00	JS-16-00
JS-12-00	JS-12-00

CONTACT SIZE	MIN. INSUL. O.D. [mm]	MAX. INSUL. O.D. [mm]	WIRE RANGE [mm ²] REF ONLY
16	.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.5]
12	.134 [3.40]	.170 [4.32]	12-14 AWG [3.0-2.0]
4	.280 [7.11]	.292 [7.42]	6 AWG [13.0]

SEE DTHD04-1-4P AND
DTHD06-1-4S FOR REPLACEMENT

- 3 MATERIAL - VMQ (RED-ORANGE)
- 2 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

1. JS-12-00 SHOWN FOR REFERENCE ONLY.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
in [mm]

MATERIAL

3

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±.025 [0.64]

4 PLC ±

ANGLES ±0°30'0"

FINISH

DWN J. QUESADES 28AAPR1997

CHK D. MEYER 09MAR2011

APVD R. REED 09MAR2011

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME JIFFY SPLICE SIZES 16, 12, AND 4 ENVIRONMENTAL

SIZE A3

CAGE CODE 4AFU8

DRAWING NO JS-XX-XX

RESTRICTED TO -

SCALE 4:1

SHEET 1 OF 1

REV H