


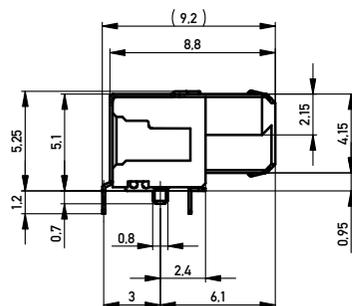





Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
 Tape on Reel Packaging according to DIN IEC 60286-3
 Verpackungseinheit: 500 Stück
 Packaging unit: 500 pcs



Abspulrichtung - Reel off Direction

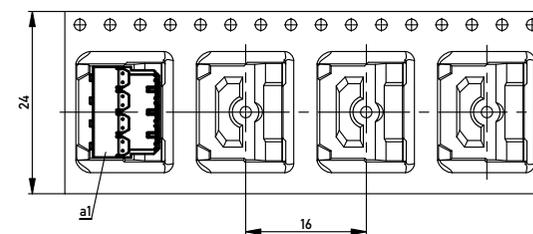

Leiterplatten-Layout Vorschlag / PCB-layout proposal

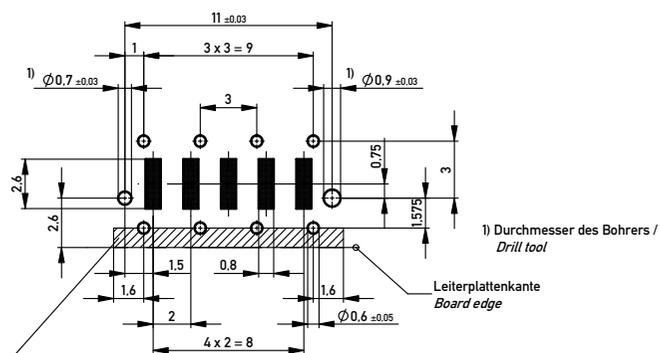

Schirmblechauftragfläche berücksichtigen.
 keine Durchkontaktierungen oder Leitungen möglich!
 Consider shielding contact area, no vias or traces possible!

Anforderungsstufe 1
 Performance Level 1

Kontaktbereich vergoldet
 Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
 Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
 Coplanarity Area of Termination ≤ 0.1 mm

Information:	Tolerances		Scale: 5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	All Dimensions in mm	Designation
d	27.05.2015	ERNI	MSpeed Federl. 90° PM SMD/THR
Index	Date	www.ERNI.com	MSpeed female 90° PM SMD/THR
		364710	I
		Class	A2
		MSPPP	

Copyright by ERNI Production GmbH & Co. KG
 Proprietary notice pursuant to §90 1 Abs. 1 Nr. 10 to be observed

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[364710](#)