



DIMENSIONS mm (inches)

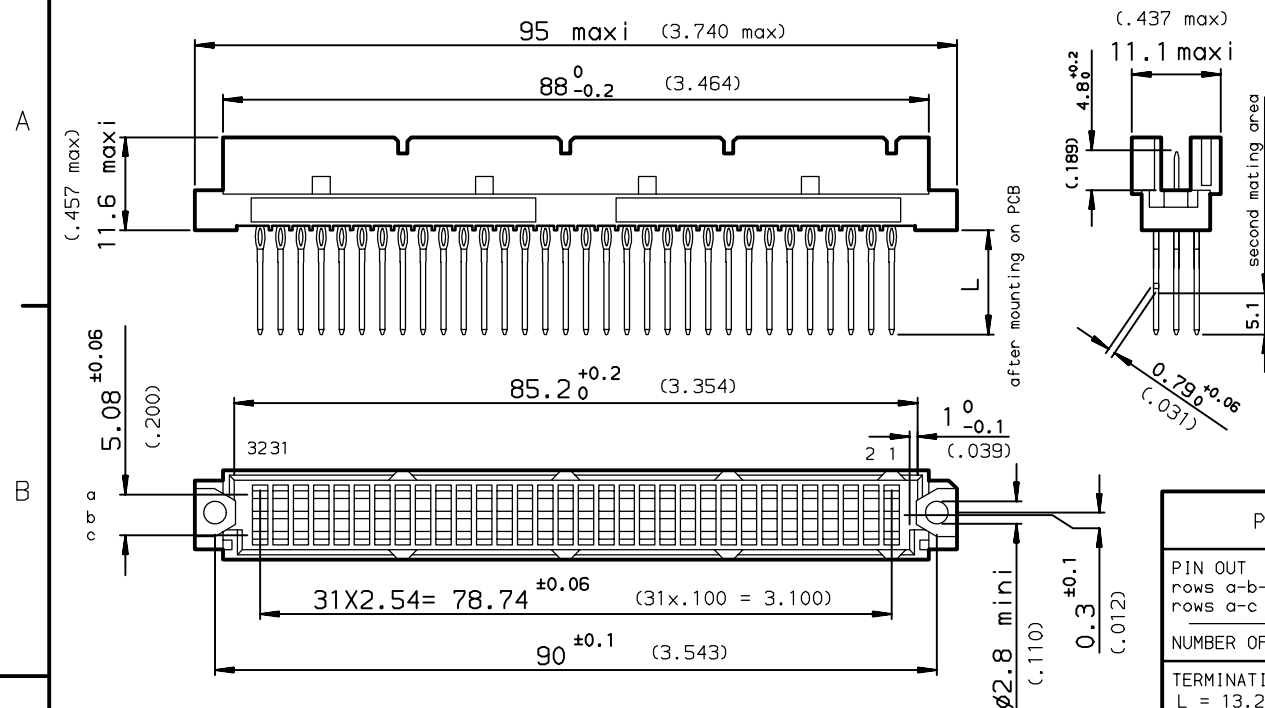

PCB DRILLING

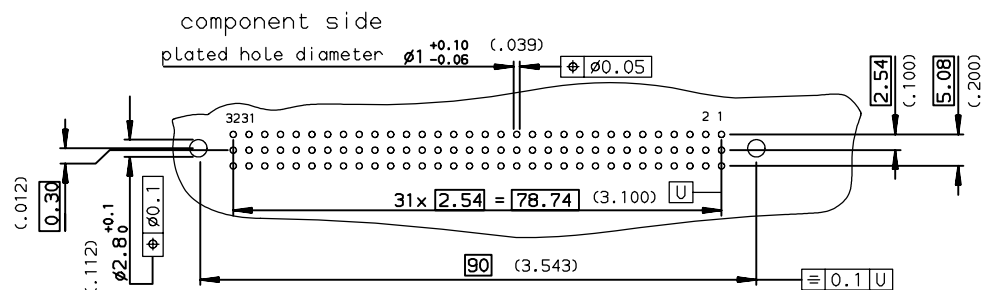

PART NUMBER		8609		78		7		5	
PIN OUT		rows a-b-c		3		96			
		rows a-c		4		64			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)		near plug up				96			
L = 17.25 ±0.25 (.679)		near plug up + 1 wrap				97			
L = 20.00 ±0.25 (.787)		near plug up + 2 wraps				98			
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD								000	
LEAD FREE								LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm		size A3		Scale 1.5	
		TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	ROUILLARD	1992/07/07	ANGULAR	LINEAR	0.X	±0.1	size	A3	ECN	L506-0095	
Eng	TARON	1992/07/07	0.XX	±0.1	0.XX	±0.1	ECN	L506-0095			
Chr	LEGARE	1992/07/07	0.XX	±2	0.XXX	±0.1	ECN	L506-0095			
Appr	LEGARE	1992/07/07	Product family		Din 8609		Spec ref		-		
FCI		title		STRAIGHT MALE - STYLE R		drg no		C-8609-0285		Rev.	
				PRESS FIT REAR PLUG UP						F	
		catalog no		-		CUSTOMER		sheet 1 of 1			

rev	ecn no	dr	date
D	-	ATC	1998/12/09
E	L505-004	JTA	2005/02/26
F	L506-0095	LGO	2006/06/15
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-