

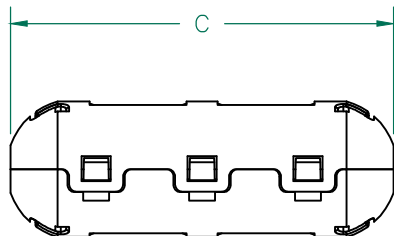


CORE DIMENSIONS

A	15.00 [.591]	+ 0.50 [.020]	-
B	6.55 [.258]	+ 0.30 [.012]	-
C	39.78 [1.566]	+ 0.60 [.024]	-
D	7.16 [.282]	+ 0.35 [.014]	-

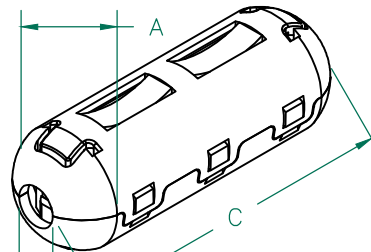


CASE DIMENSIONS:

A	18.75 [.738]	+ REF.	-
B	6.75 [.266]	+ REF.	-
C	52.91 [2.083]	+ REF.	-
D	18.75 [.738]	+ REF.	-
E	3.24 [.128]	+ REF.	-

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	186 Ω	407 Ω	575 Ω
Minimum	- Ω	305 Ω	- Ω

Z vs. FREQUENCY (REF. ONLY)

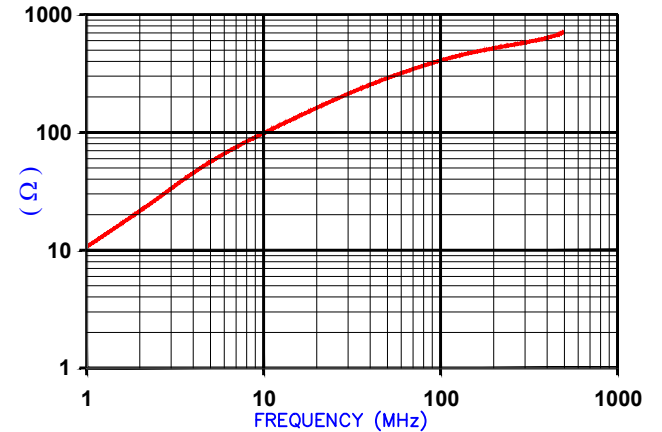

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 4095

UNCONTROLLED DOCUMENT

NOTES:

- ASSEMBLED PART #: 28A0593-0A2
- CASE COLOR: BLACK-0A2.
- CASE FLAMMABILITY RATING: UL94 V-2.
- CASE MATERIAL: Halogen Free Nylon

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.				
K	UPDATED CORE TOL	12/23/15	Jcai	PROJECT/PART NUMBER: 28A0593-0A2	REV	K	PART TYPE: FERRITE SNAP-ON	DRAWN BY: TMB
J	UPDATED Z SPEC	11/24/14	Jcai		SCALE:	N.T.S.	MATERIAL:	Ferrite
H	UPDATED NOTE 3	09/15/10	JUN	DATE:	04/28/04	TOOL #	-	
G	ADD NOTES 3 AND 4	01/27/09	JRK	CAD #	28A0593-0A2-K			
F	ADD MISSING DIM CALLOUTS "D & E" TO CASE UPDATE COMPANY LOGO	05/07/08	TMB	REV				
E	UPDATE 100MHZ MINIMUM VALUE UPDATE COMPANY LOGO TOLERANCES TO REF VIEWS UPDATE NOTES	06/26/07	TMB					
D	REV CASE DIM C TO MATCH CASE PRINT	01/11/07	TMB					
REV	DESCRIPTION	DATE	INT					