

LOC	DIST	REVISIONS					
		REV	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	J		REV PER ECO 08-009474	7/21/2008	DW	JL

- 1

POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:NATURAL
- 2

POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:BLACK
- 3

POLYMETHYLPENTENE, GENERAL PURPOSE.
- 4

ZINC PER QQ-Z-363.
- 5



BERYLLIUM COPPER PER QQ-C-530.
- 6

BRASS PER ASTM-B-453.
- 7


NICKEL PLATE PER QQ-N-290
3.81 μm [.000150] MINIMUM THICK.
- 8

TIN PLATE PER ASTM-B-545
3.81 μm [.000150] MINIMUM THICK.
- 9

GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
10. SEE INSTRUCTION SHEET 2769.

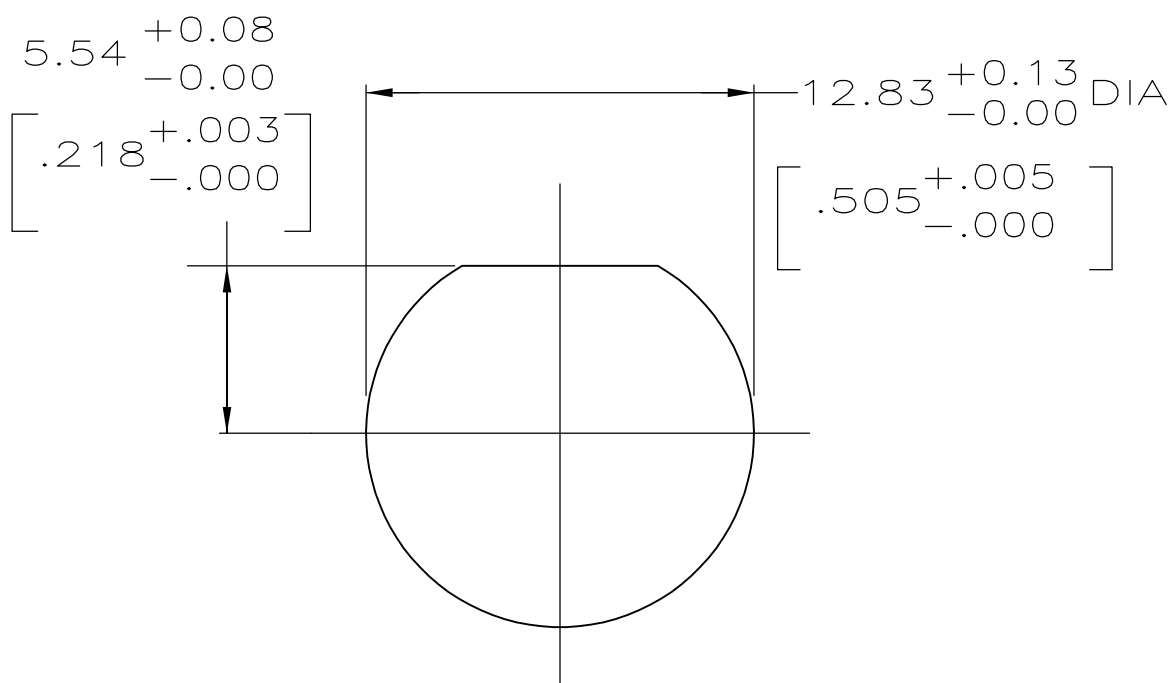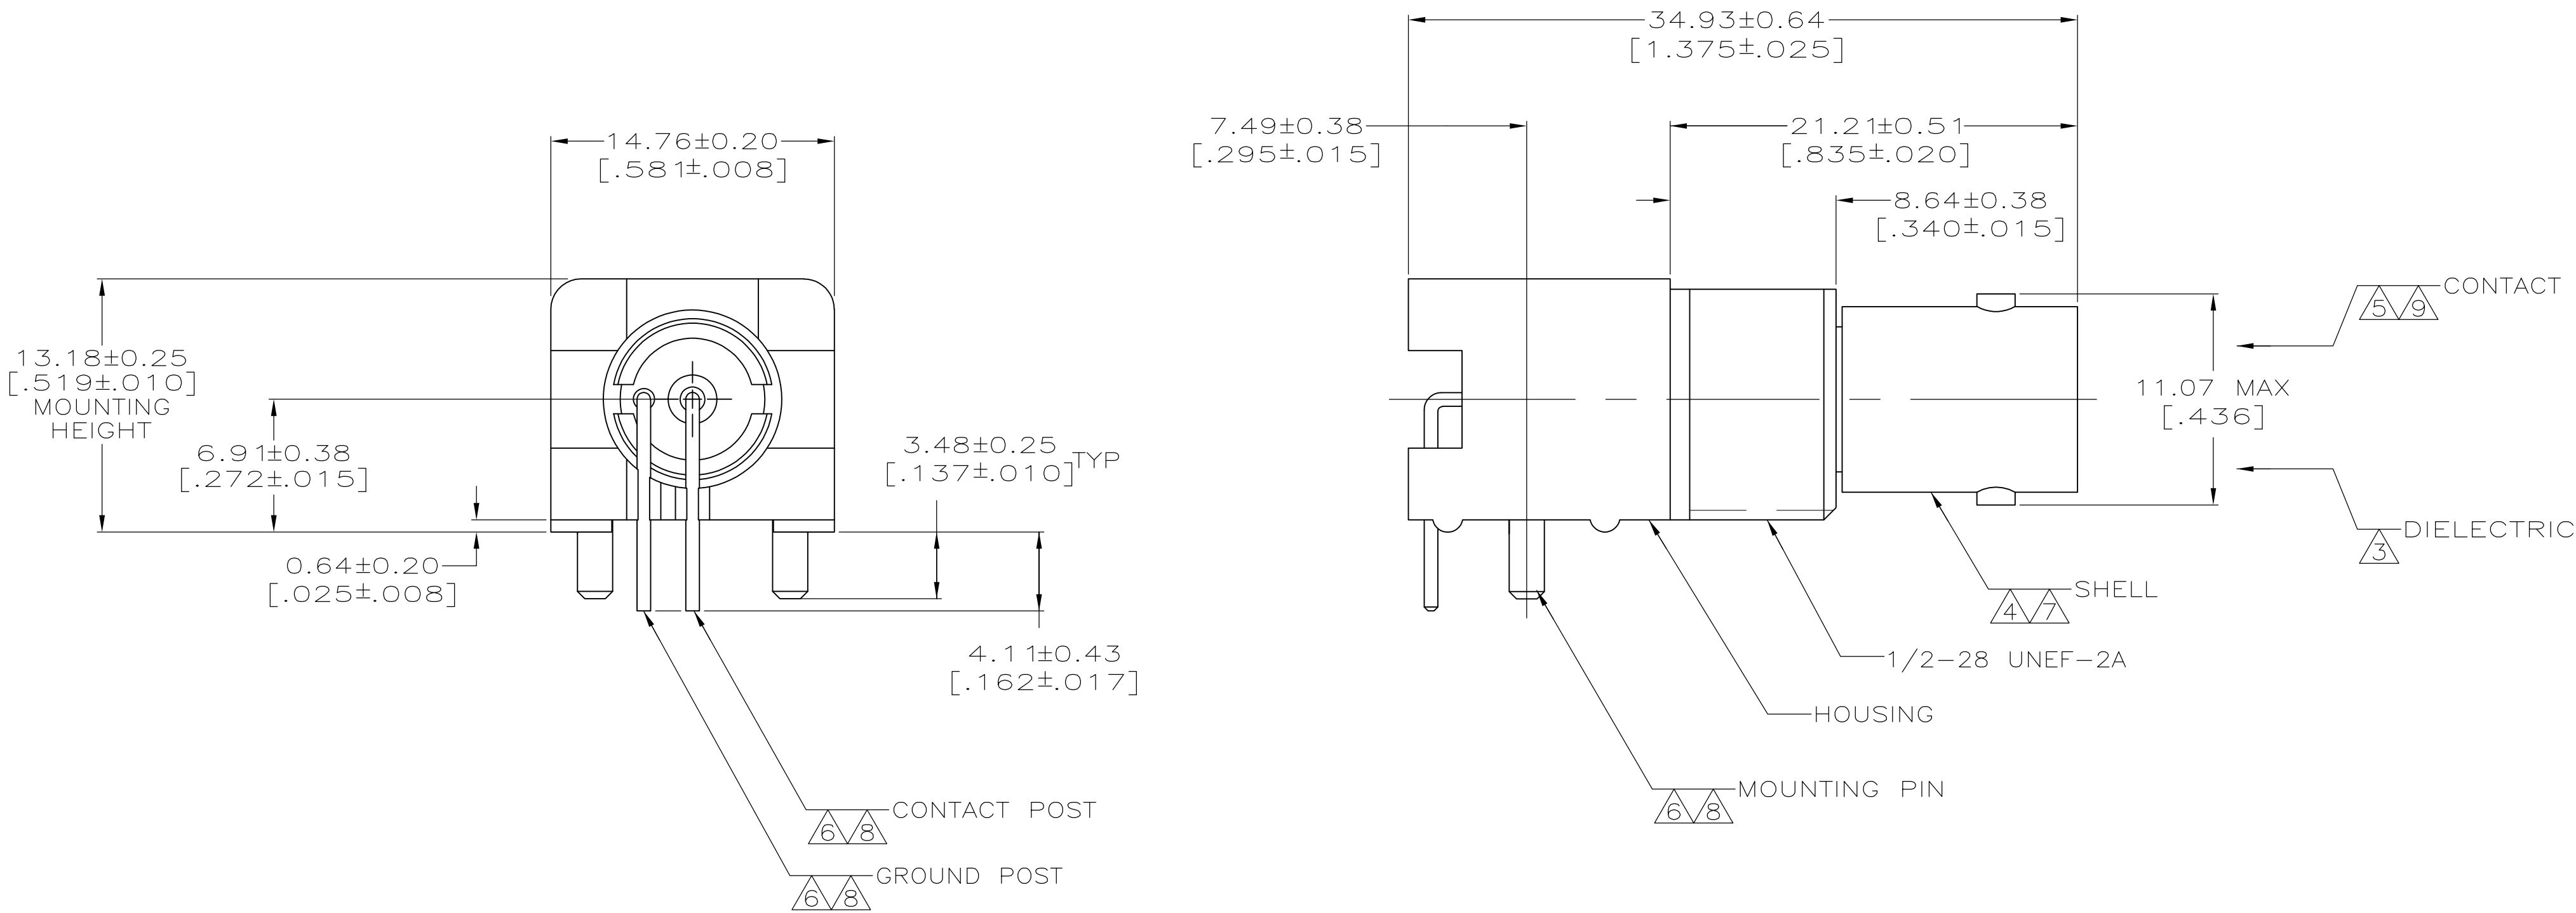

RECOMMENDED PANEL CUTOUT

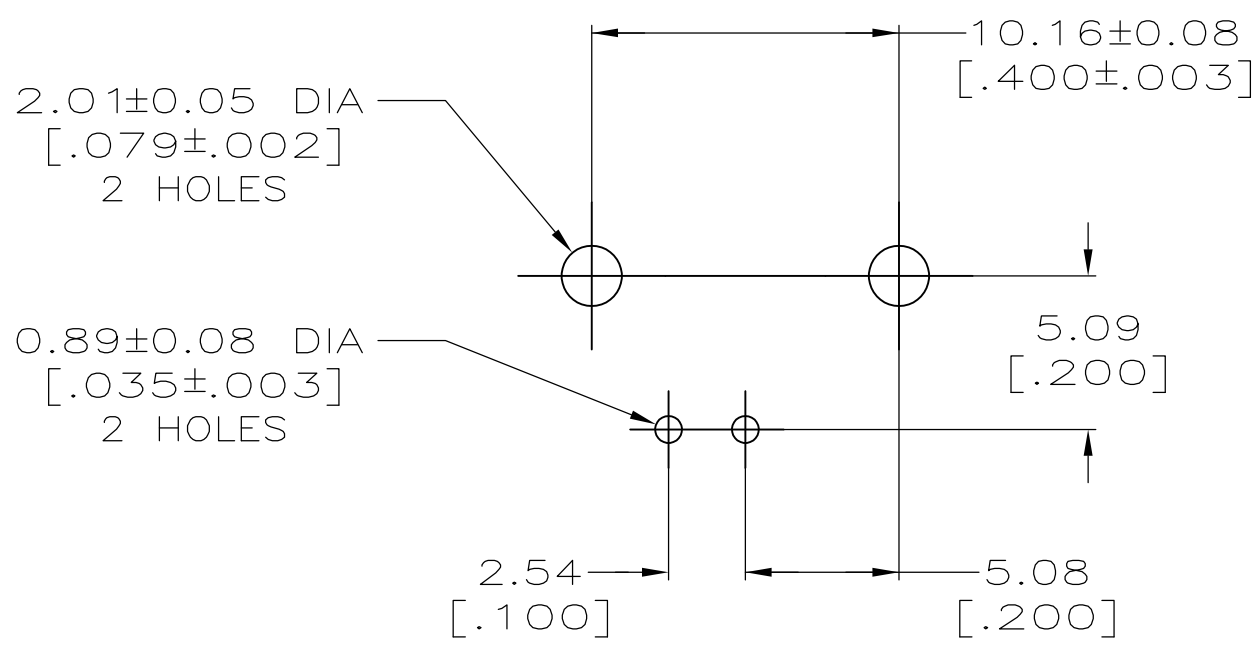

PCB CONFIGURATION

	413194-2
	413194-1
HOUSING MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SCOTT CHK J. LIPPERT	11-29-90 2-1-91	Tyco Electronics Corporation Middletown, PA 17057	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD A. GABANY	2-1-91	NAME	JACK, RIGHT ANGLE, PCB, 75 OHM, BNC
	0. PLC ± -	PRODUCT SPEC	—	SIZE	CAGE CODE DRAWING NO
	1. PLC ± -	APPLICATION SPEC	—	WEIGHT	—
MATERIAL SEE NOTES 1-6	FINISH SEE NOTES 7-9	REVISIONS	—	SCALE	4:1
CUSTOMER DRAWING		SHEET	1	OF	1
		REV	J		