



1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. CERTAIN TERMINALS REQUIRE LUBRICATION. REFER TO THE APPLICATOR INSTRUCTION SHEET FOR MORE INFORMATION.
5. CUT TO LENGTH AT ASSY.

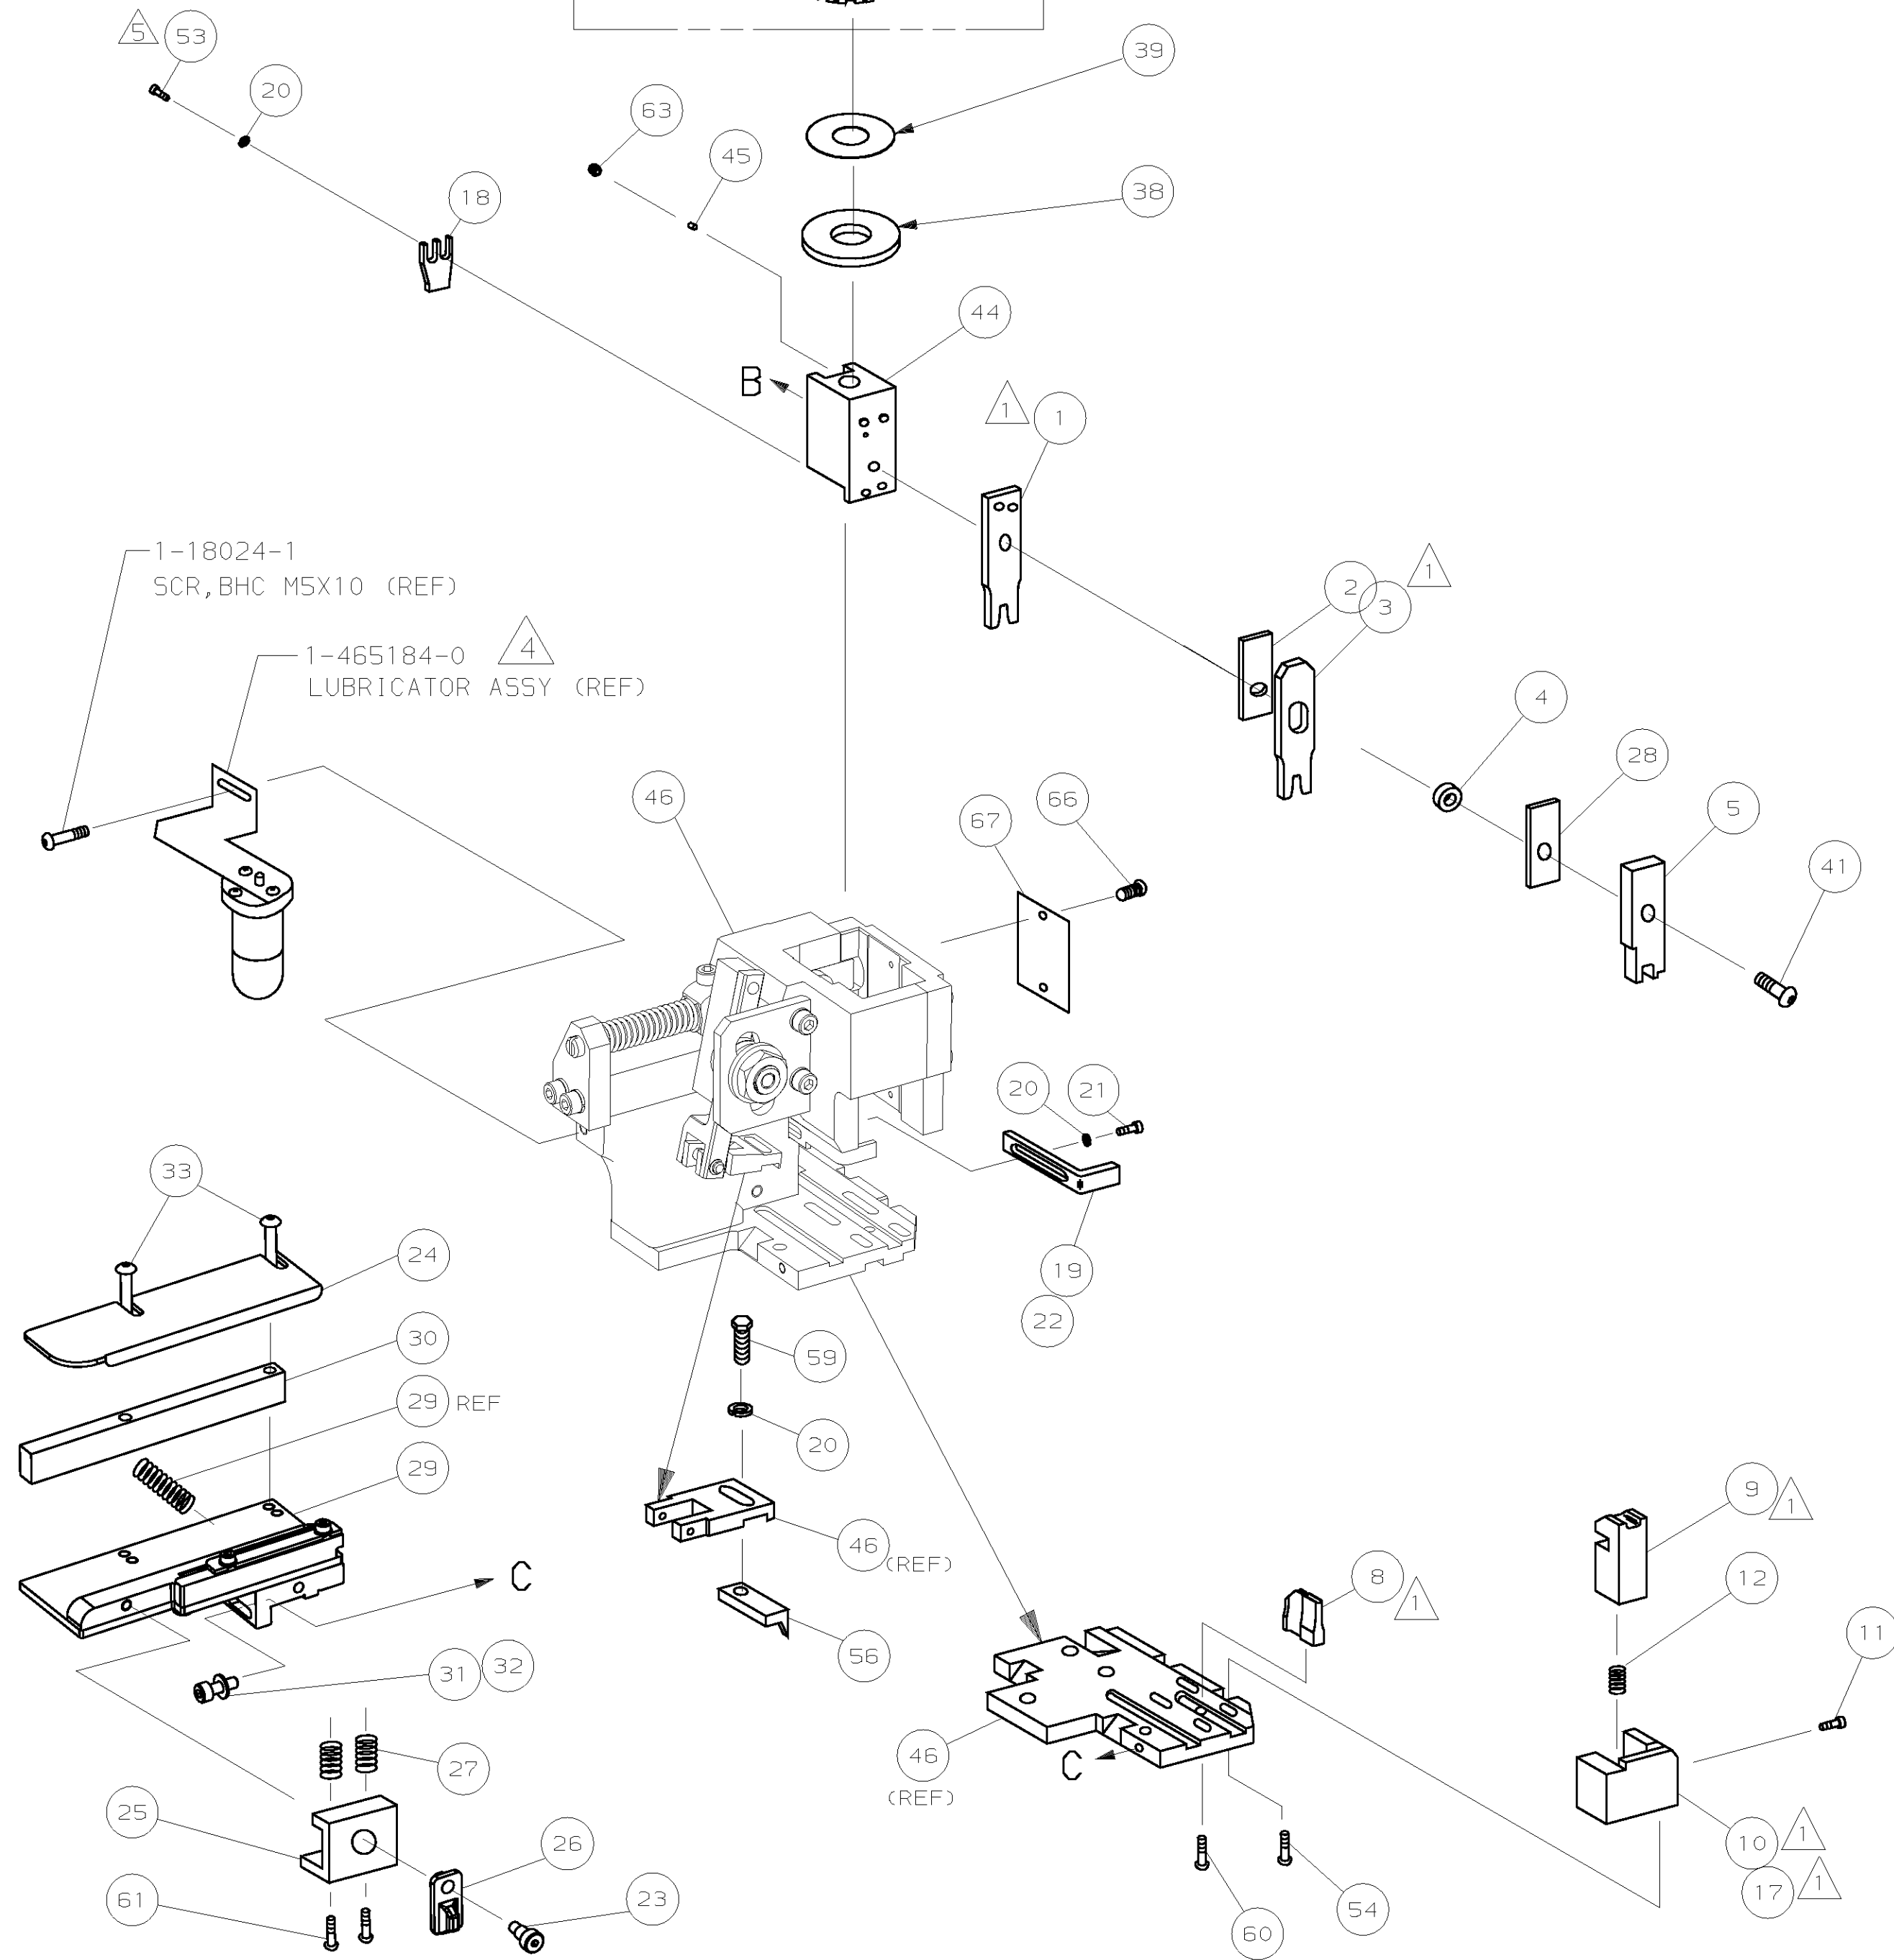

* WARNING:
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS BELOW MIN REQ'D CRIMP
HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

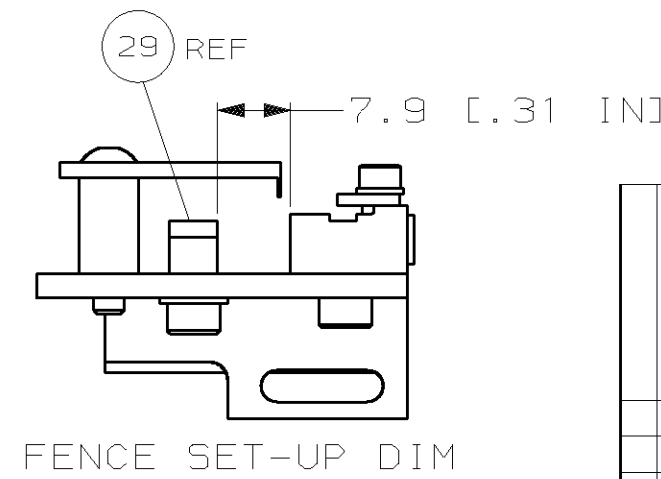

-77	-76	-72	-71	-	-2	-1	PART NO			DESCRIPTION			ITEM NO
							← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)						
QTY REQD PER ASSY							PARTS LIST						
		DIMENSIONS: mm [INCHES] DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC DEC ±0.5 [0.02 IN] 2 PLC DEC ± 3 PLC DEC ±				MATL	-	HT TR	-	FIN	-		
		DR 175EP01 APP 175EP01 L LOFHOUSE F BACKHURST				 AMP Incorporated Harrisburg, PA 17105-3508							
		CHK - REL 230CT01 L LOFHOUSE											
PL	DEC	2	3	1	0	NAME				FINE ADJ SIDE FD HD-I APPL		MACHINE REF HD-I APPL	
D5	03-02	ANGLES ±				SCALE		-	D	DWG NO	1528047	SHEET 1 of 1	REV C
LJL	0CT01	SURF TEXTURE: ✓				REMOVE BURRS, BREAK SHARP EDGES LO.38 MAX							