

**1N4454 SIGNAL DIODE**


**Absolute Maximum Ratings (Ta=25°C)**

Items	Symbol	Ratings	Unit
Reverse Voltage	VR	75	V
Reverse Recovery Time	trr	4	ns
Power Dissipation 3.33mW/°C (25°C)	P	400	mW
Forward Current	IF	225	mA
Junction Temp.	Tj	-65 to 175	°C
Storage Temp.	Tstg	-65 to 175	°C

**Mechanical Data**

Items	Materials
Package	DO-35
Case	Hermetically sealed glass
Lead/Finish	Double stud/Solder Plating
Chip	Glass Passivated

**Dimensions (DO-35)**

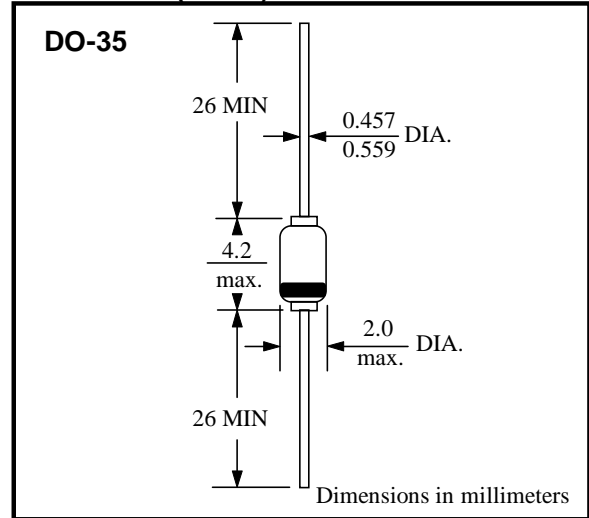

**Electrical Characteristics (Ta=25°C)**

Ratings	Symbol	Ratings	Unit
Minimum Breakdown Voltage IR= 5.0uA IR= 100uA	BV	75 100	V
Peak Forward Surge Current PW= 1sec.	IFsurge	0.5	A
Maximum Forward Voltage IF= 10mA	VF	1.0	V
Maximum Reverse Current VR= 50V VR= 50V, Tj= 150°C	IR	0.10 100.0	uA
Maximum Junction Capacitance VR= 0, f= 1 MHz	Cj	4	pF
Maximum Reverse Recovery Time IF= 10mA, VR= 6V, IRR= 1mA, RL= 100Ω	trr	4	ns