


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,8]	W ± .01 [0,3]	C ± .015 [0,4]	M ± .03 [0,8]	H ± .01 [0,3]
PMV1-3FB	--	M3	.78 [19,8]	.23 [5,8]	.20 [5,1]	.64 [16,3]	.13 [3,3]
PV18-6FB	#6	M3,5	.78 [19,8]	.30 [7,6]	.20 [5,1]	.64 [16,3]	.15 [3,8]
PV18-6FNB	#6	M3,5	.78 [19,8]	.25 [6,4]	.20 [5,1]	.64 [16,3]	.15 [3,8]
PV18-8FB	#8	M4	.84 [21,3]	.32 [8,1]	.23 [5,8]	.68 [17,2]	.17 [4,3]
PV18-6RNB	#6	M3,5	.75 [19,1]	.23 [5,8]	.19 [4,8]	.63 [16,0]	.15 [3,8]
PV18-10FB	#10	--	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PV18-10FNB	#10	--	.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PMV1-5FB	--	M5	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]
PV18-14FB	1/4"	M6	1.03 [26,2]	.44 [11,2]	.33 [8,4]	.78 [19,9]	.27 [6,9]

NOTES:

- USED FOR:
 - #22-18 AWG [0,5-1,0 mm²] SOLID OR STRANDED COPPER WIRE
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600 V. MAX. VOLTAGE RATING
- INSTALLATION TOOLS:
 - PRESSES: CP-861, CP-862, CP-871
 - APPLICATOR: CA-800EZ, CA9
 - DIE INSERTS: CD-800-1, CD9-1A
- WIRE STRIP LENGTH: 1/4" ^{+1/32}₋₀ [6,4^{+0,8}₋₀]
- MATERIAL:
 - STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - HOUSING: VINYL, RED
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

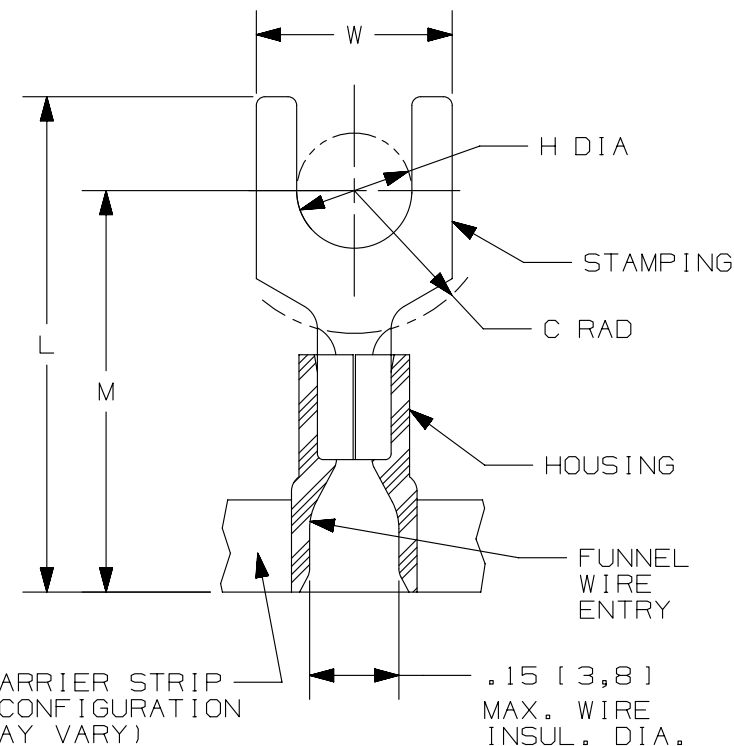

LISTED
587H
E52164



CERTIFIED
LR31212

04	09.17.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41081
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE		FORK TERMINALS, 2 PC. VINYL INSULATED, #22-18	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41081BA/05	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [2.54] .xx ± .01 [.25]		.xxx ± .005 [.13] ANGLES ± 5°	
THIRD ANGLE PROJECTION		SEE NOTES	
DRAWN BY DSM		DATE -	
CHK FS		SCALE N.T.S.	
SHT 1 OF 1		SIZE A	