


# 2.5mm Round microLED<sup>®</sup> Optopipe™

## Optical Light Pipe, Tri-High, Narrow Pitch

# Dialight

## 515-1064

2

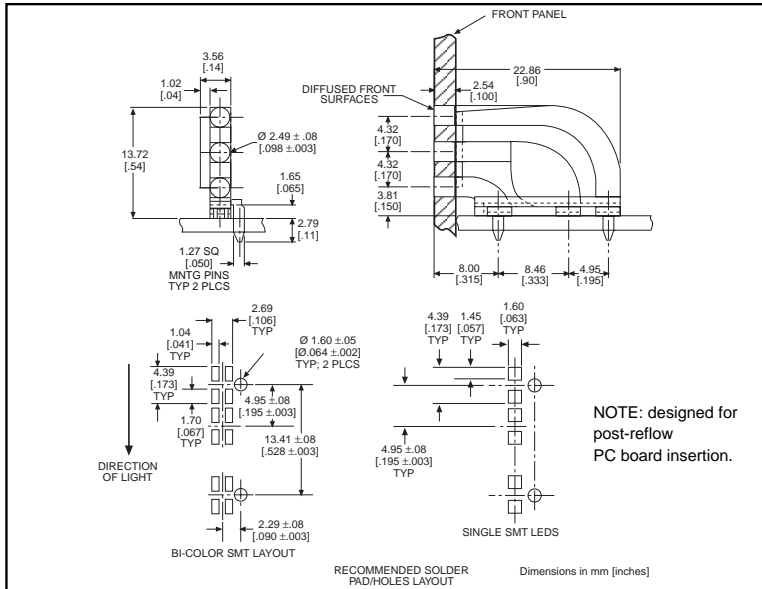

## Recommended MicroLED SMT LEDs for use with 515-1064

PART NO.	COLOR	PAGE #
597-3111-5xx	AlGaAs Red	1-30
597-3211-5xx	Orange	1-30
597-3301-5xx	Green	1-30
597-3401-5xx	Yellow	1-30
597-7701-5xx	Red/Green	1-31
597-7721-5xx	Yellow/Green	1-31

### Features

- Suitable for High Density Arrays (.200 min array pitch)
- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Allows tri-level SMT indicators
- Secures to PCB by press-fit

### Dialight Optopipe Light Pipe Description

This Optopipe™ has 3 vertical 2.5mm diameter elements placed 0.170" apart. They are bright and have good optical isolation. Similar in appearance to our 3mm tri-level 564 Series, they can be placed in arrays with an 0.200" pitch. It can utilize single or multi-color LEDs. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe™ solutions for your applications.

### LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

### Operating/Storage Temperature

-30°C to +100°C