



Drilling Hole



Panel Thickness

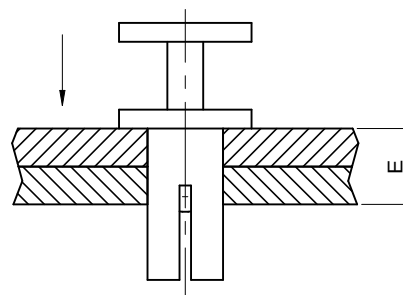

Flammability according to: UL94 V-2

| Order Code | G<br>(mm) | Ø D2<br>(mm) | Ø D1<br>(mm) | L<br>(mm) | E<br>(mm) | Ø f<br>(mm) | Type | Packaging<br>Unit |
|------------|-----------|--------------|--------------|-----------|-----------|-------------|------|-------------------|
| 700970300  | 4,0       | 2,0          | 3,5          | 0,5       | 2,0-3,    | 2,0         | 1    | 1000              |
| 700970500  | 5,0       | 2,0          | 4,8          | 0,75      | 2,5-3,    | 2,0         | 1    |                   |
| 700970600  | 6,0       | 2,0          | 4,8          | 0,75      | 3,5-4,    | 2,0         | 1    |                   |

Würth Elektronik eiSos GmbH & Co. KG  
EMC & Inductive Solutions

Max-Eyth-Str. 1  
74638 Waldenburg  
Germany  
Tel. +49 79 42 945 - 0

www.we-online.com  
eiSos@we-online.com



CREATED  
D. Fandrey

CHECKED  
S. Klingler

PROJECTION  
METHOD

SCALE  
5 : 1

DESCRIPTION  
**AsEXRV  
Snap rivet**

MATERIAL  
Nylon 66, black

GENERAL TOLERANCE  
DIN ISO 2768 T1m

ORDER CODE  
700970x00

WEIGHT STATUS  
Released

REV DATE  
1.0 2016-03-07

DE Revision  
2.0