
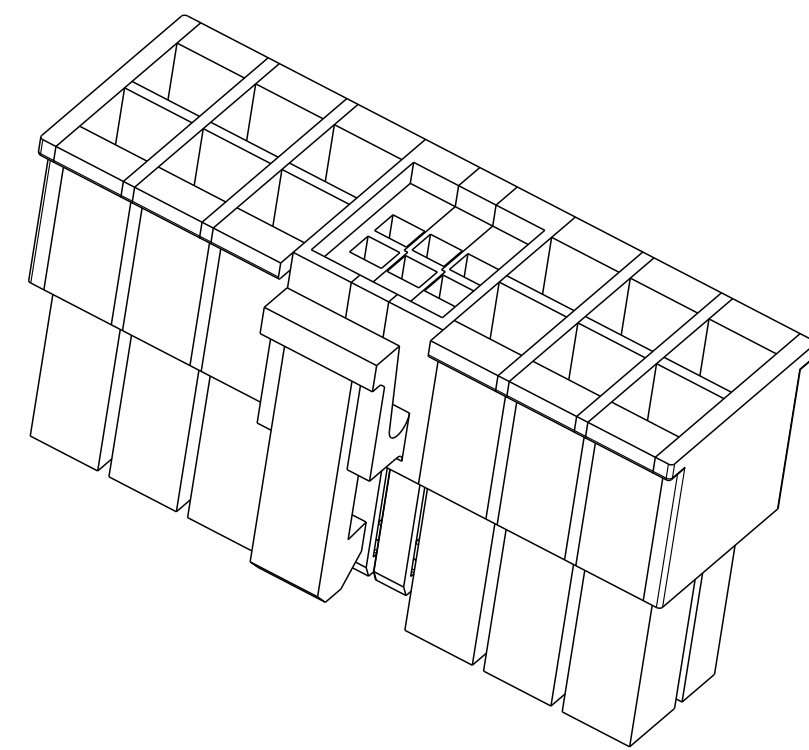
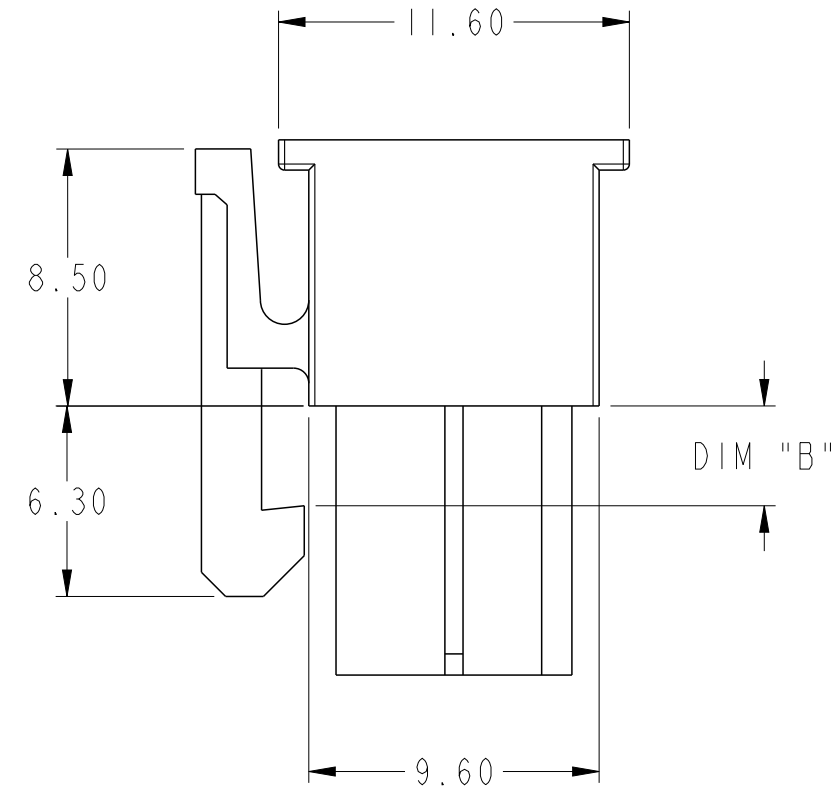
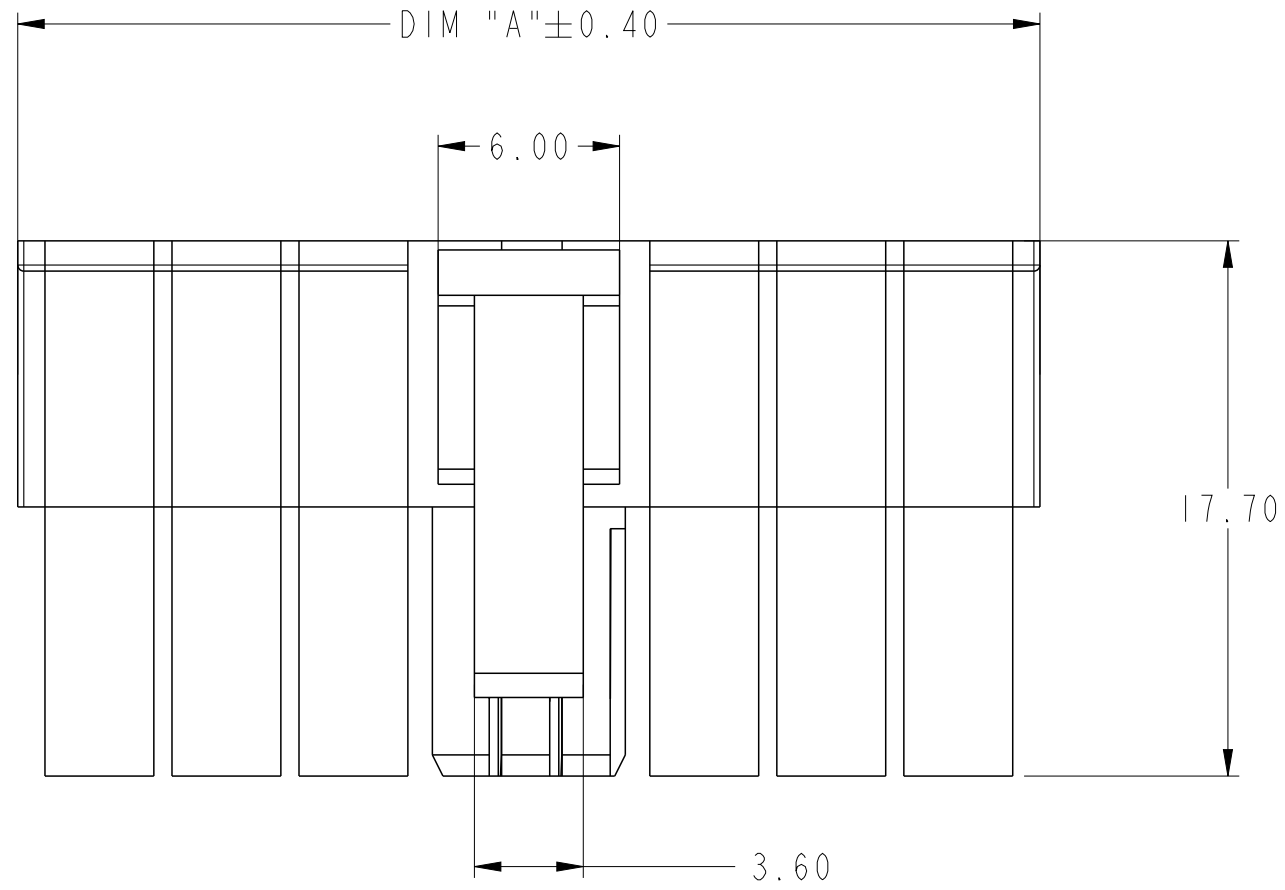


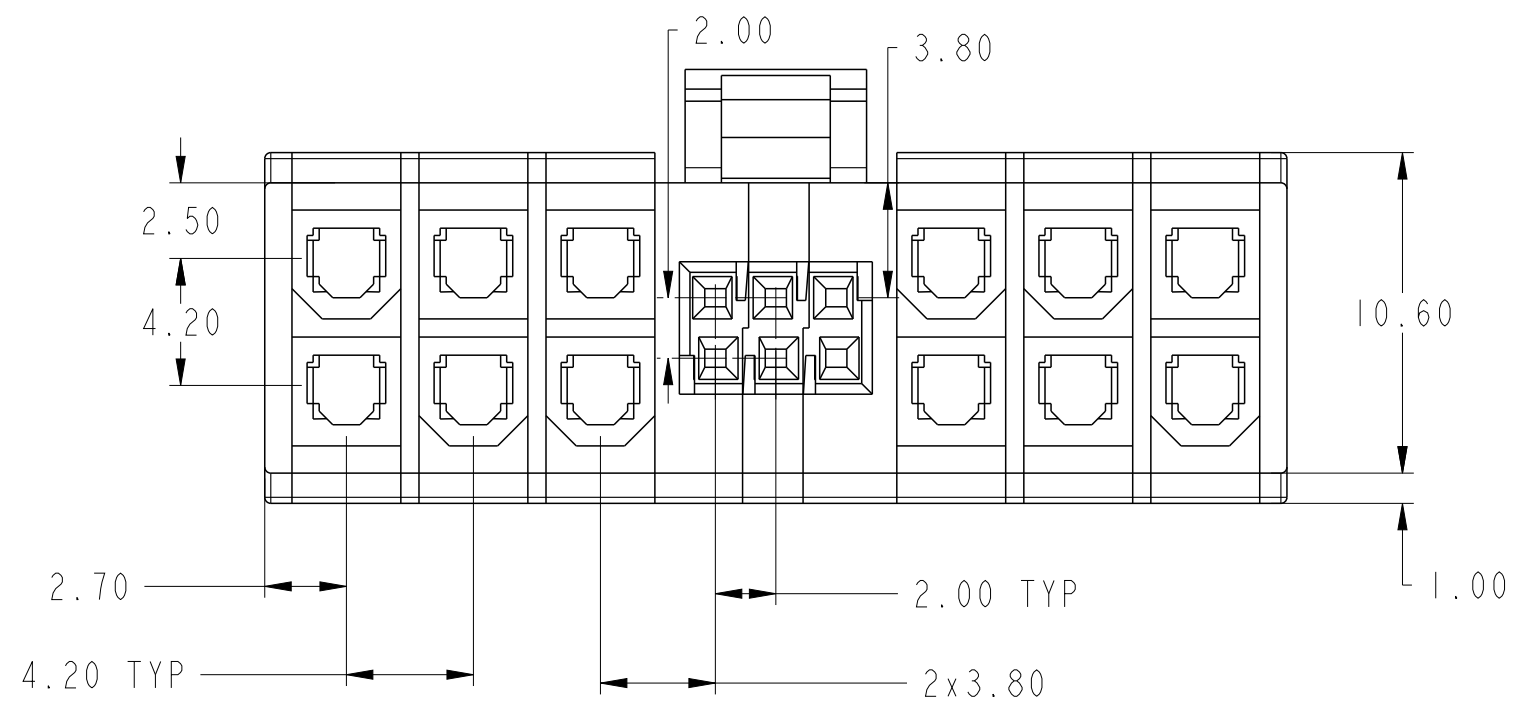


SCALE 3:1


TOTAL NUMBER OF POWER CONTACTS AND NUMBER OF SIGNAL CONTACTS	Dim"A"	DIM " B"
2P2S2P	13.0	3.30
2P4S2P	15.0	3.30
2P6S2P	17.0	3.30
2P8S2P	19.0	3.30
2P10S2P	21.0	3.30
2P12S2P	23.0	3.30
4P2S4P	21.4	3.30
4P4S4P	23.4	3.30
4P6S4P	25.4	3.30
4P8S4P	27.4	3.30
4P10S4P	29.4	3.30
4P12S4P	31.4	3.30
6P2S6P	29.8	3.30
6P4S6P	31.8	3.30
6P6S6P	33.8	3.30
6P8S6P	35.8	3.30
6P10S6P	37.8	3.30
6P12S6P	39.8	3.60
8P2S8P	38.2	3.60
8P4S8P	40.2	3.60
8P6S8P	42.2	3.60
8P8S8P	44.2	3.60
8P10S8P	46.2	3.60
8P12S8P	48.2	3.60
2POS0P(2P)	5.0	3.30
2POS2P(4P)	9.6	3.30
2POS4P(6P)	13.8	3.30
4POS4P(8P)	18.0	3.30
4POS6P(10P)	22.2	3.30
6POS6P(12P)	26.4	3.30
6POS8P(14P)	30.6	3.30
8POS8P(16P)	34.8	3.30

PRELIMINARY									
spec ref		dr		2015/02/16		projection		size	scale
tolerance std		eng		2015/03/25		MM		A2	5:1
ISO 406		chr		-		ecn no		-	
ISO 1101		appr		-		product family		rel level	
surface		linear		0.X	±0.50	FCI		title	
ISO 1302		angular		0°	±3°	www.fci.com		cat. no.	
								Minitex Pwr Hybrid 4.2mm	
								REC HSG ASSY	
								10129815	
								1	
								Product - Customer Drw	
								sheet 1 of 2	


2POS0P(2P)



2POS2P(4P)




2POS4P(6P)

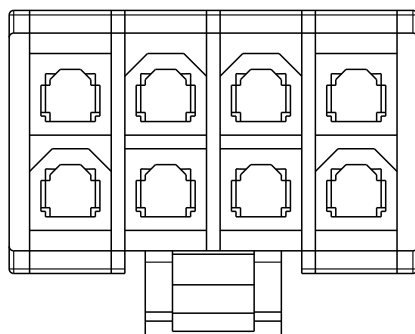


4POS4P(8P)


8POS8P(16P)

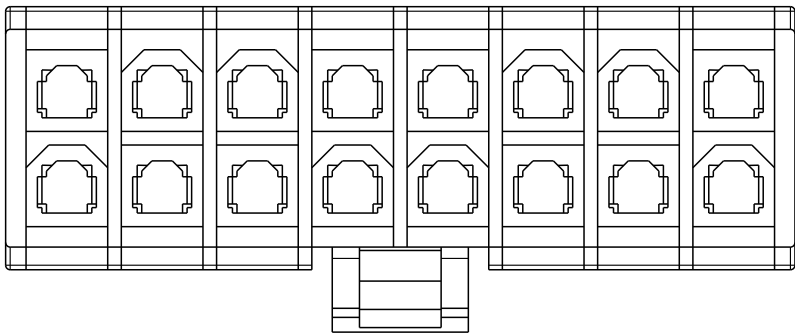


6POS8P(14P)

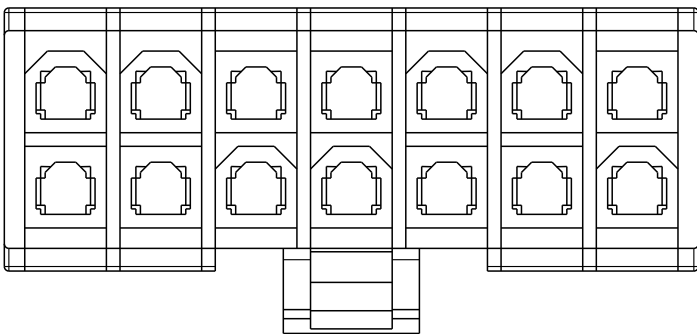


6POS6P(12P)

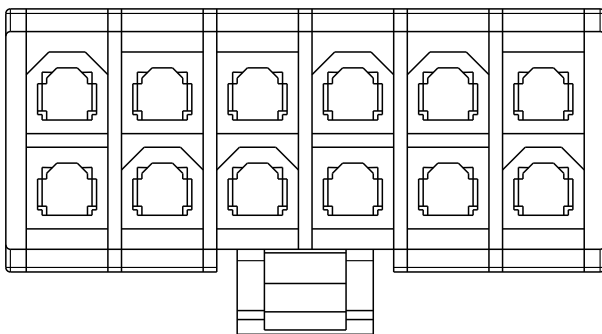

4POS6P(10P)

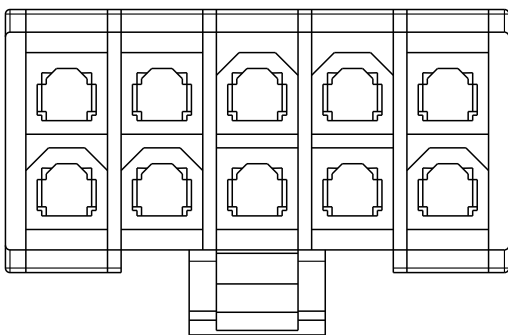

6P2S6P

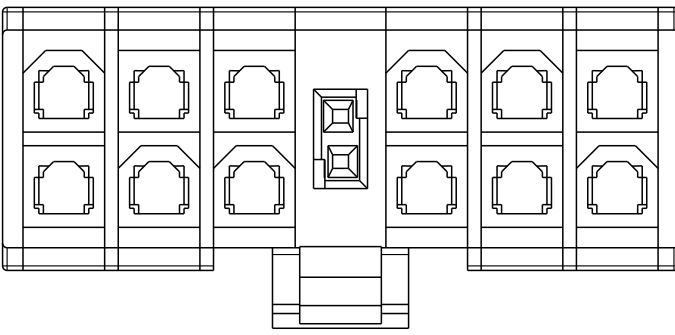

BASE NUMBER

10129815 - X X X X X LF

LEAD FREE

RESERVE NUMBER: 00

NUMBER OF RIGHT POWER PINS : 0,2,4,6,8

NUMBER OF SIGNAL PINS : 0,2,4,6,8,A-10,B-12

NUMBER OF LEFT POWER PINS :2,4,6,8



NOTES:


1. MATERIALS:
NYLON 6/6 , UL94V-0, COLOR: NATURE

3. PRODUCT SPECIFICATION: GS-12-1288.

4. APPLICATION SPECIFICATION: GS-20-0438.

5. PACKAGING SPECIFICATION: GS-14-2450.

POWER PIN LAYOUT (WITH OR WITHOUT SIGNAL PINS)

spec ref				dr		Jes Wu	2015/02/16	projection		MM		size		A2		scale		5:1							
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Jes Wu	2015/03/25					ecn no -									
ISO 406				chr		-	-	product family -																	
ISO 1101				appr		-	-																		
surface						linear		0.X		±0.50				title		Minitex Pwr Hybrid 4.2mm		dwg no		10129815		rev		1	
ISO 1302								0.XX		±0.25															
								0.XXX		±0.10															