


# **DIMENSIONS:** mm (in.)

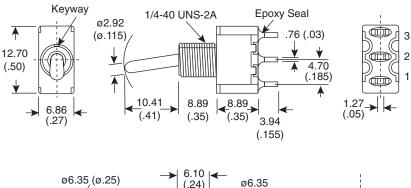



Ø6.35 (Ø.25) Ø2.38 (Ø.094)



Without locking ring

With standard locking ring.

PANEL MOUNTING

PC MOUNTING

POS.1	POS.2
<b>*</b>	
ON	(ON)
2-3	2-1
2 Comm. 3	2 Comm. 3 0

SWITCH FUNCTION

### **Mechanical Specifications:**

• Operating Temperature: -30°C to +85°C

#### Note:

RoHS Compliant by Exemption

### **Electrical Specifications:**

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Rating: 2A/ 250VAC, 5A/ 120VAC or 28VDC
- Dielectric Strength: 1,000 V RMS@ sea level

## **Materials:**

- Case: Diallyl phthalate (DAP)
- Acutuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Terminal/Contact: Silver plated

Toggle Switch
108-1MS2T1B1M2QE-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873