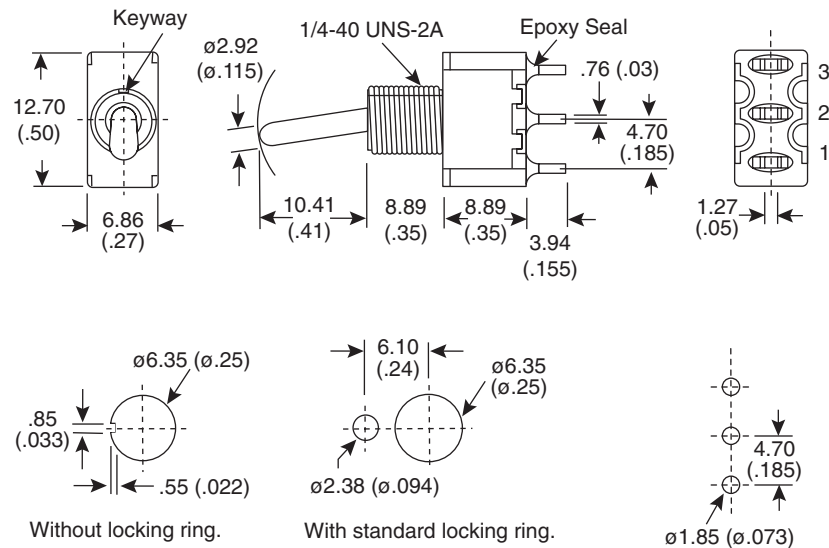


**DIMENSIONS: mm (in.)**

PANEL MOUNTING

PC MOUNTING

POS.1	POS.2
ON	(ON)
2-3	2-1

SWITCH FUNCTION

**Mechanical Specifications:**

- Operating Temperature: -30°C to +85°C

**Note:**

- RoHS Compliant by Exemption

**Electrical Specifications:**

- Contact Resistance: 10m $\Omega$  max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000M $\Omega$  min.
- Rating: 2A/ 250VAC, 5A/ 120VAC or 28VDC
- Dielectric Strength: 1,000 V RMS@ sea level

**Materials:**

- Case: Diallyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Terminal/Contact: Silver plated

**Toggle Switch**  
 108-1MS2T1B1M2QE-EVX

**Mountain**  
**Switch**