


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			N4	REVISED PER ECO-13-019645	14DEC2013	KH	MZ

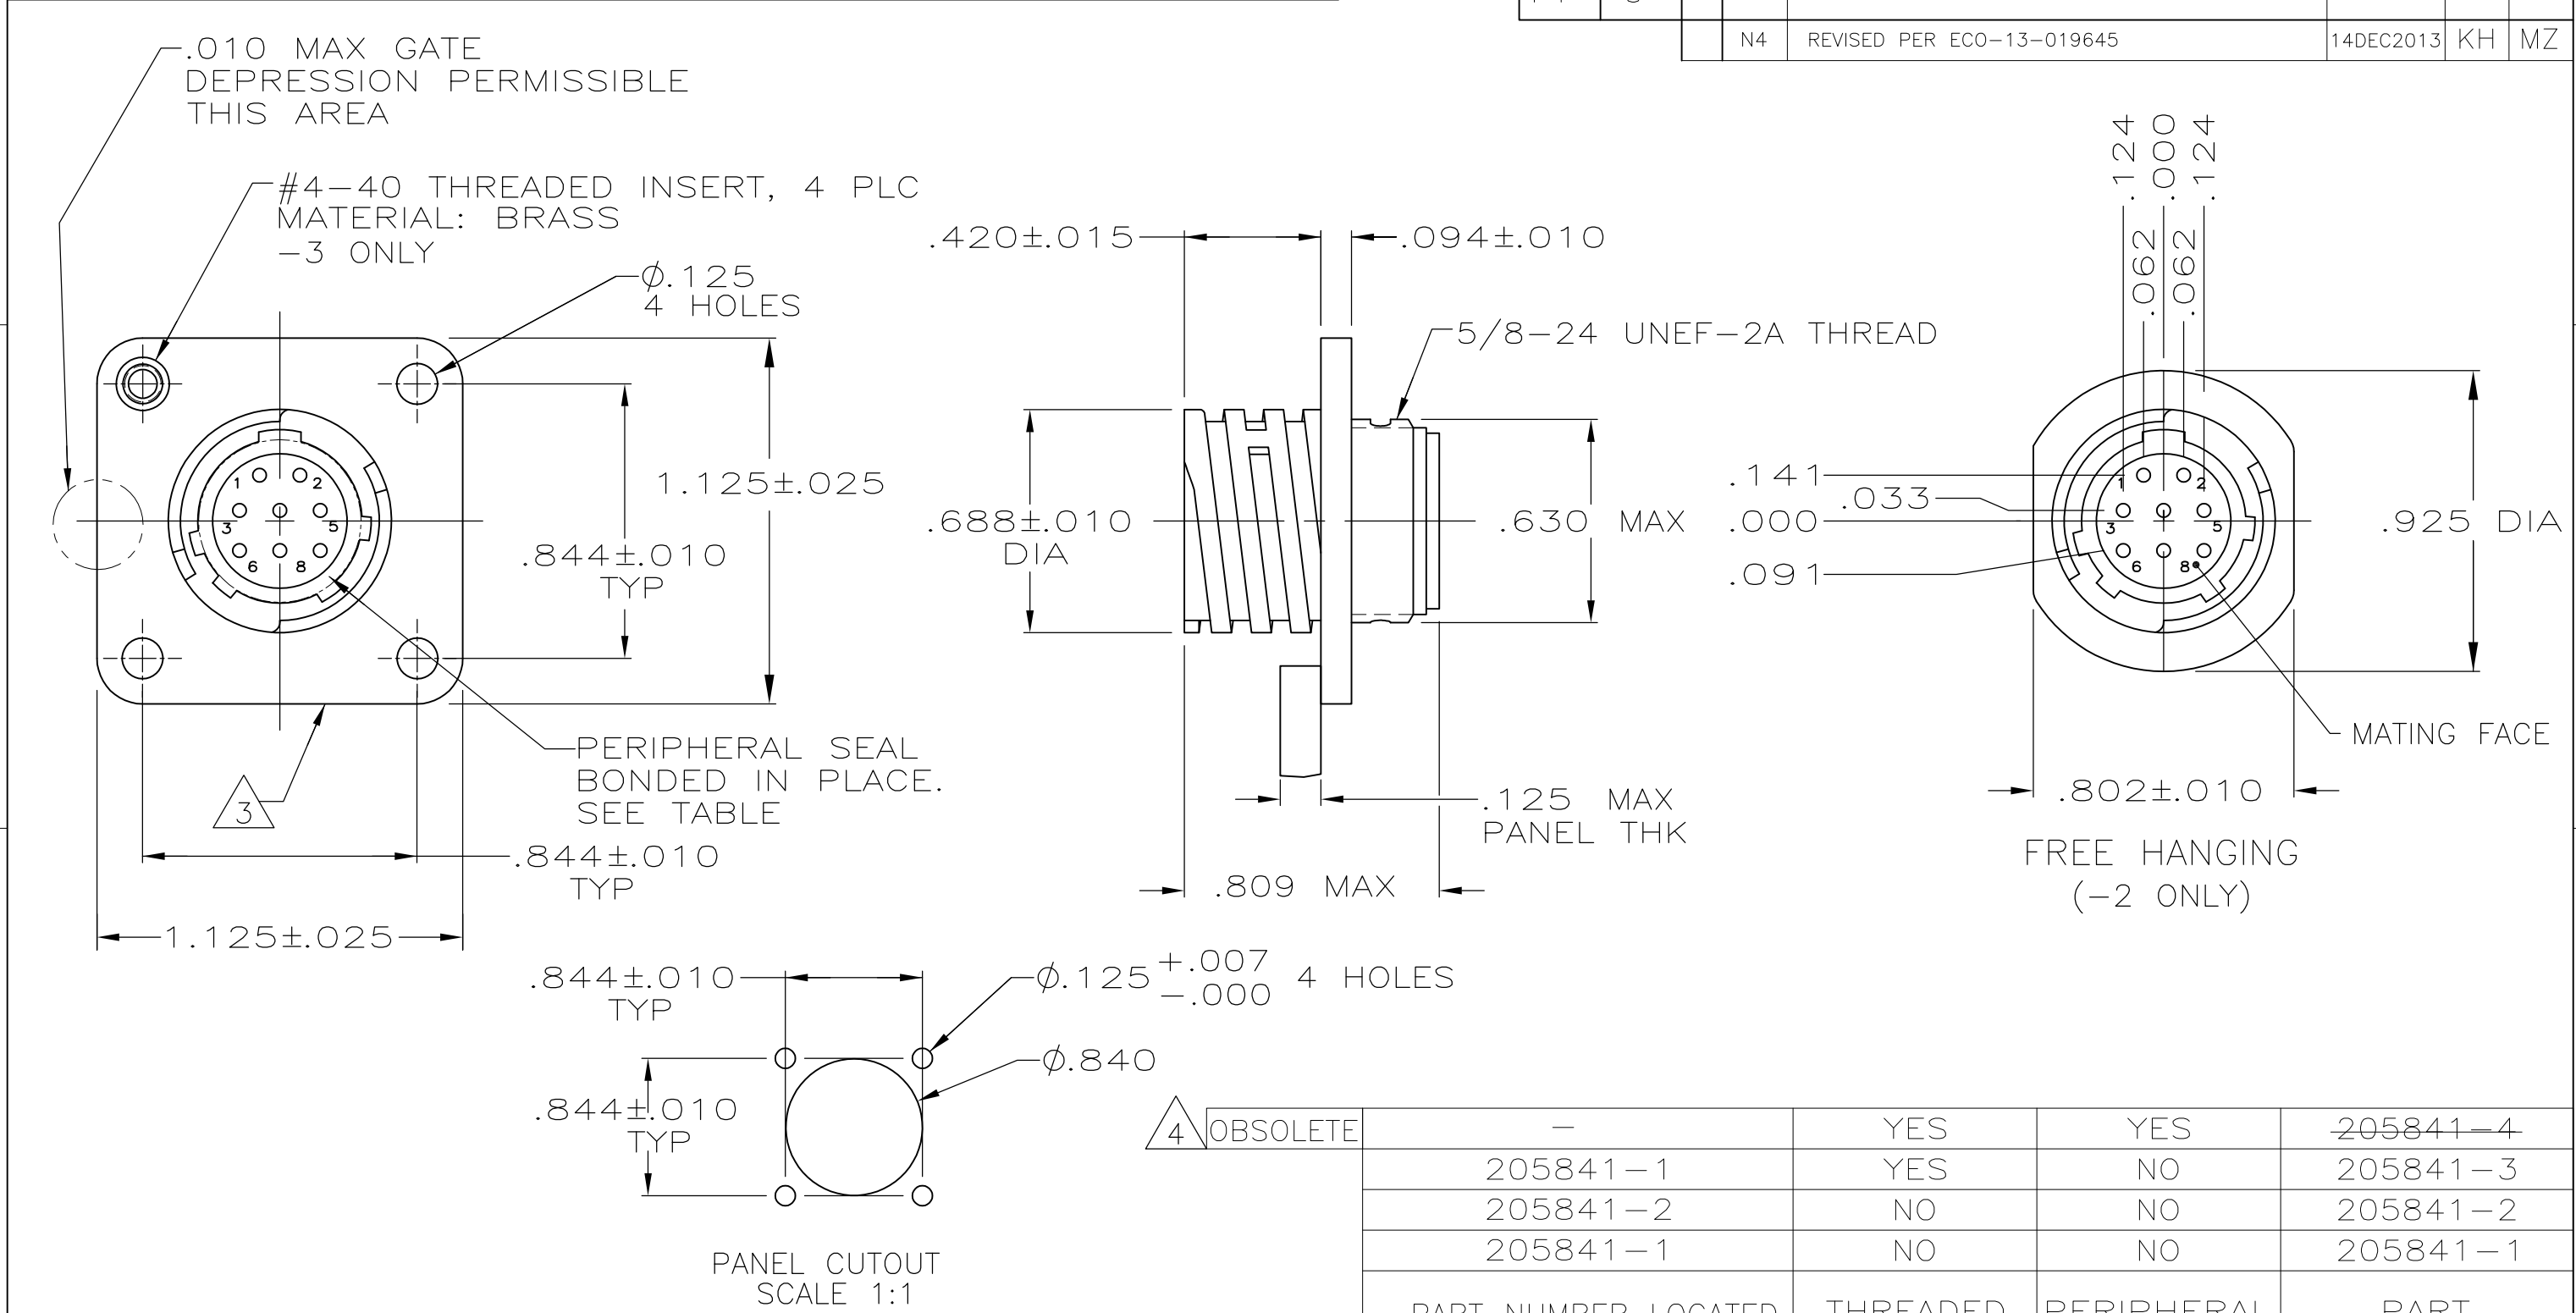


- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 WILL ACCEPT (8) SIZE 20 PIN CONTACTS.
- 3

AMP LOGO AND PART NUMBER LOCATED ON ANY FLANGE EDGE SEE CHART FOR PART NUMBER
- 4

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4 OBSOLETE	-	YES	YES	205841-4
	205841-1	YES	NO	205841-3
	205841-2	NO	NO	205841-2
	205841-1	NO	NO	205841-1
PART NUMBER LOCATED ON FLANGE EDGE		THREADED INSERTS	PERIPHERAL SEAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.STAUB BG 4/5/91		TE TE Connectivity							
		CHK W.G.LENKER 7-24-92									
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -	APVD —	—	NAME RECEPTACLE ASSEMBLY, STD SEX, SERIES 2, 11-8, CPC —							
		PRODUCT SPEC 108-10024									
		APPLICATION SPEC —									
		SIZE	CAGE CODE				DRAWING NO		RESTRICTED TO		
MATERIAL THERMOPLASTIC, BLK	FINISH —	WEIGHT —		A3	00779	C-205841		—			
CUSTOMER DRAWING						SCALE	2:1	SHEET	1 OF 1	REV	N4