

DETAIL ALVEOLES 15
DETAIL CAVITIES 15


8 x 1.00 ± 0.05

0.20 ± 0.05

8 x 1.80 ± 0.05

0.20 ± 0.05

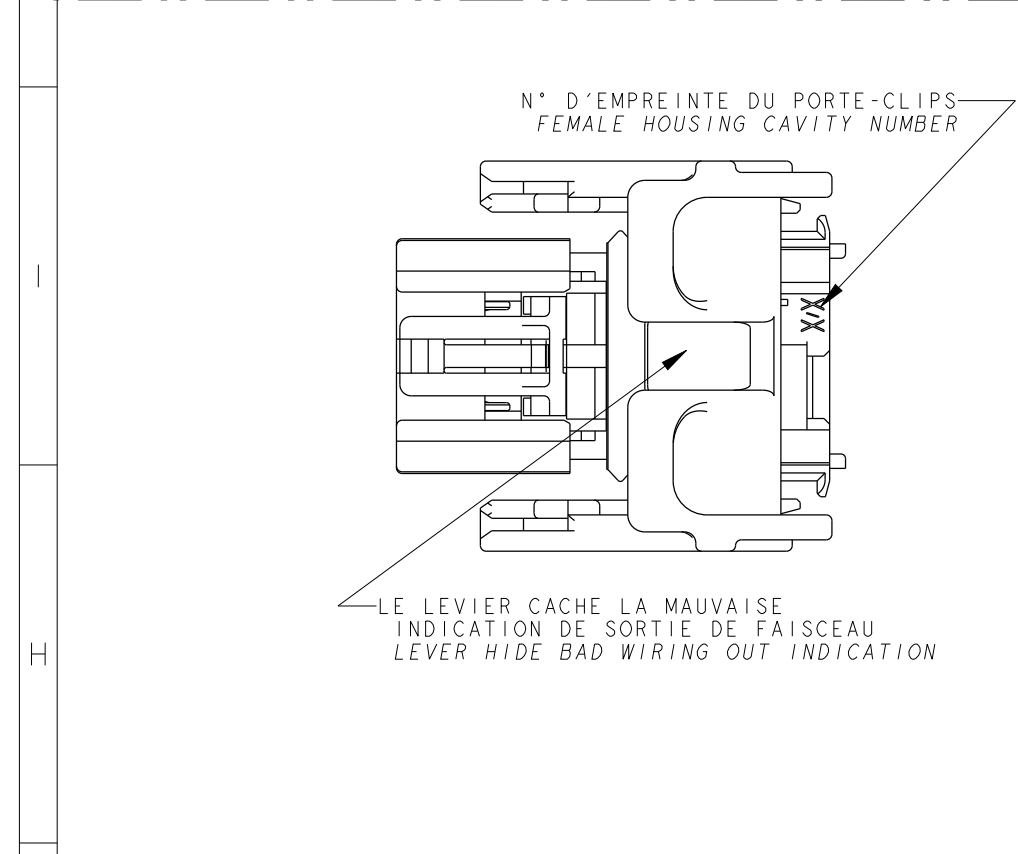
ECHELLE 5:1 / SCALE 5:1








DETAIL ALVEOLES 0.635
DETAIL CAVITIES 0.635

40 x 0.80 ± 0.05
0.20
40 x 0.90 ± 0.05
0.20

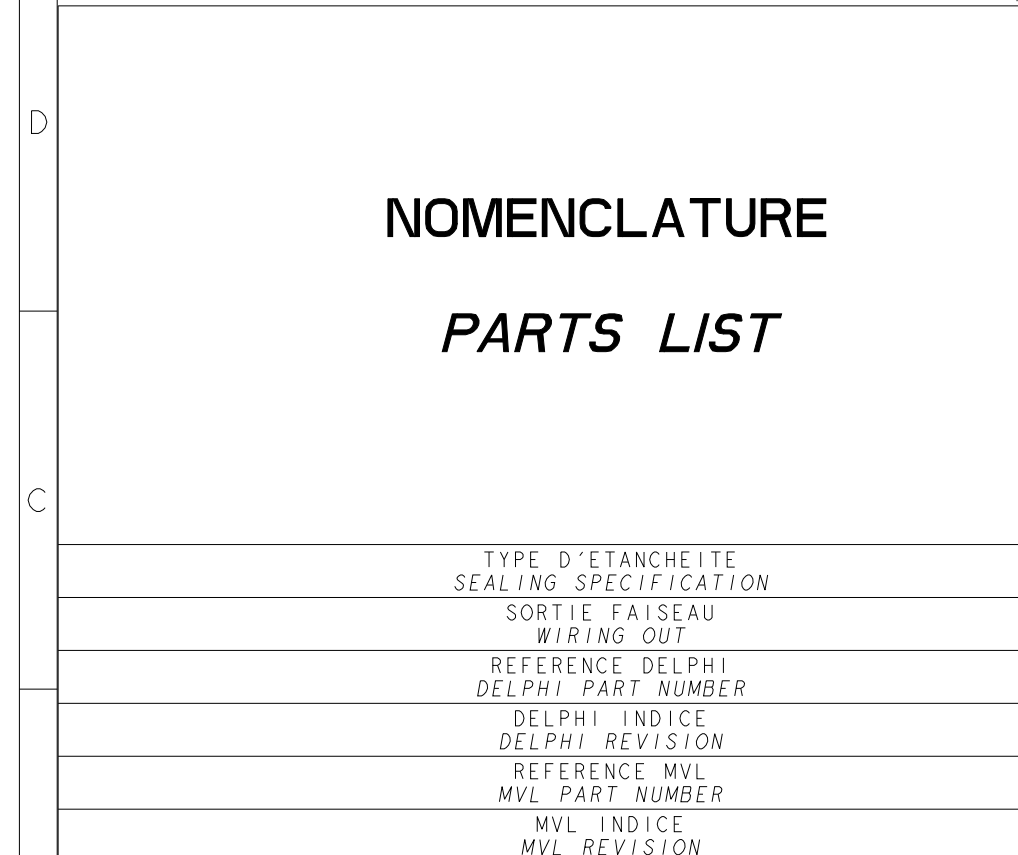ECHELLE 5:1 / SCALE 5:1



B	7	GROMMET MATE SEAL	SILICONE SILICON	GRIS GREY	PP10000425
	6	JOINT INTERFACIAL MATING SEAL	SILICONE SILICON	INCOLORE CRISTALLIN	PP10000428
		LEVIER LEVER	PAGE GF 30	NOIR BLACK	PP10000416
	4	GRILLE ARRIERE ETANCHE SEALED REAR GRID	PBT GF 15	GRIS, CLAIR LIGHT GREY	C188300
	3	GRILLE ARR. NON ETANCHE UNSEALED REAR GRID	PBT GF 15	GRIS FONC DARK GREY	C288300
	2	GRILLE AVANT FRONT GRID	PBT GF 15	NOIR BLACK	PP10000405
		GRILLE AVANT FRONT GRID	PBT GF 15	GRIS GREY	PP10000406
	2	GRILLE AVANT FRONT GRID	PBT GF 15	MARRON BROWN	PP10000407
		GRILLE AVANT FRONT GRID	PBT GF 15	VERT GREEN	PP10000408
	1	ISOLANT PORTE-CLIPS FEMALE HOUSING	PBT GF 15	NOIR BLACK	C088300
A	REP.	DESIGNATION	MATIERE MATERIAL	COULEUR COLOUR	REF. MVL P/N

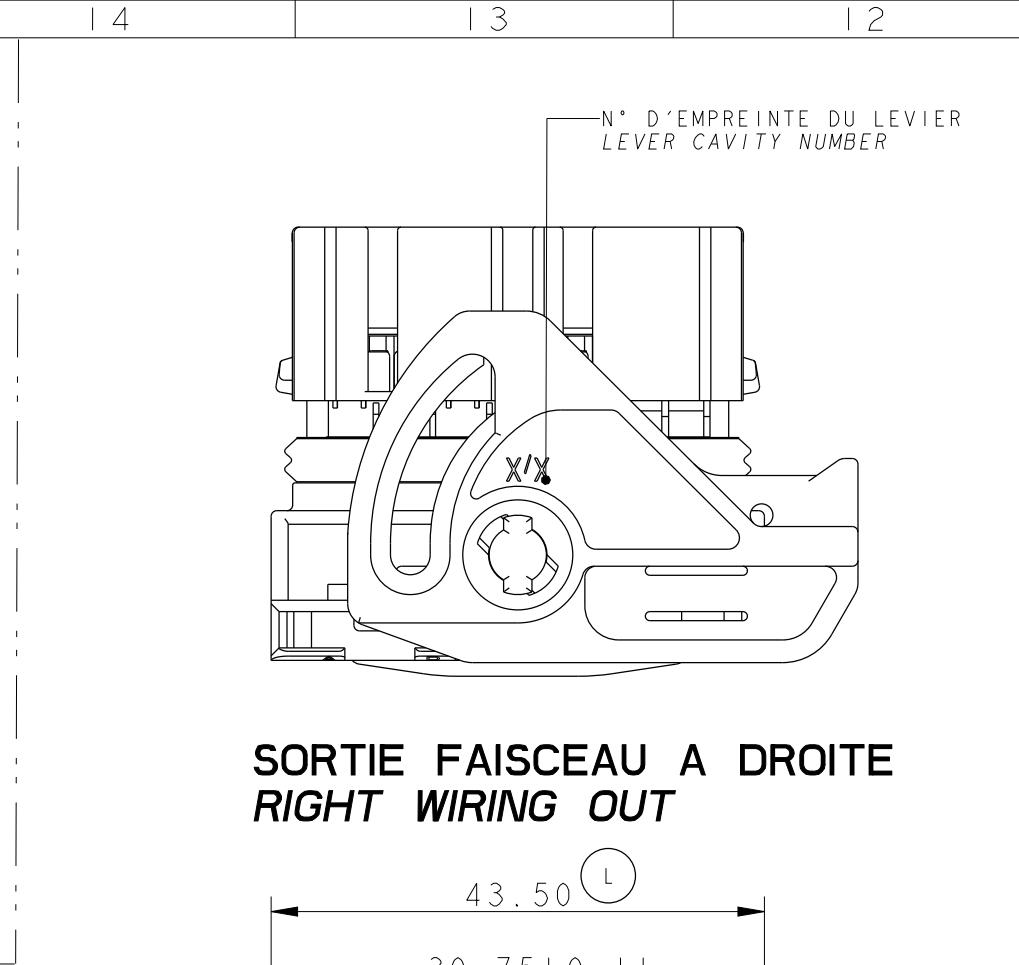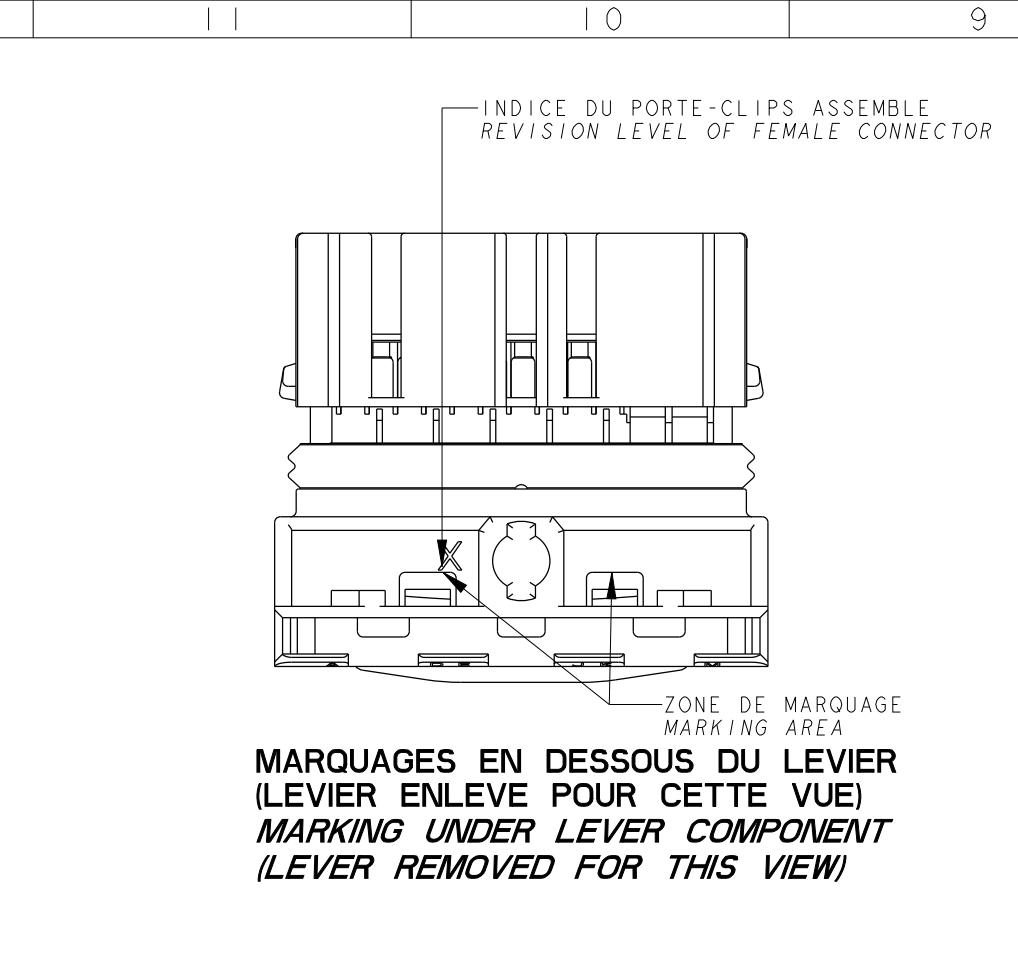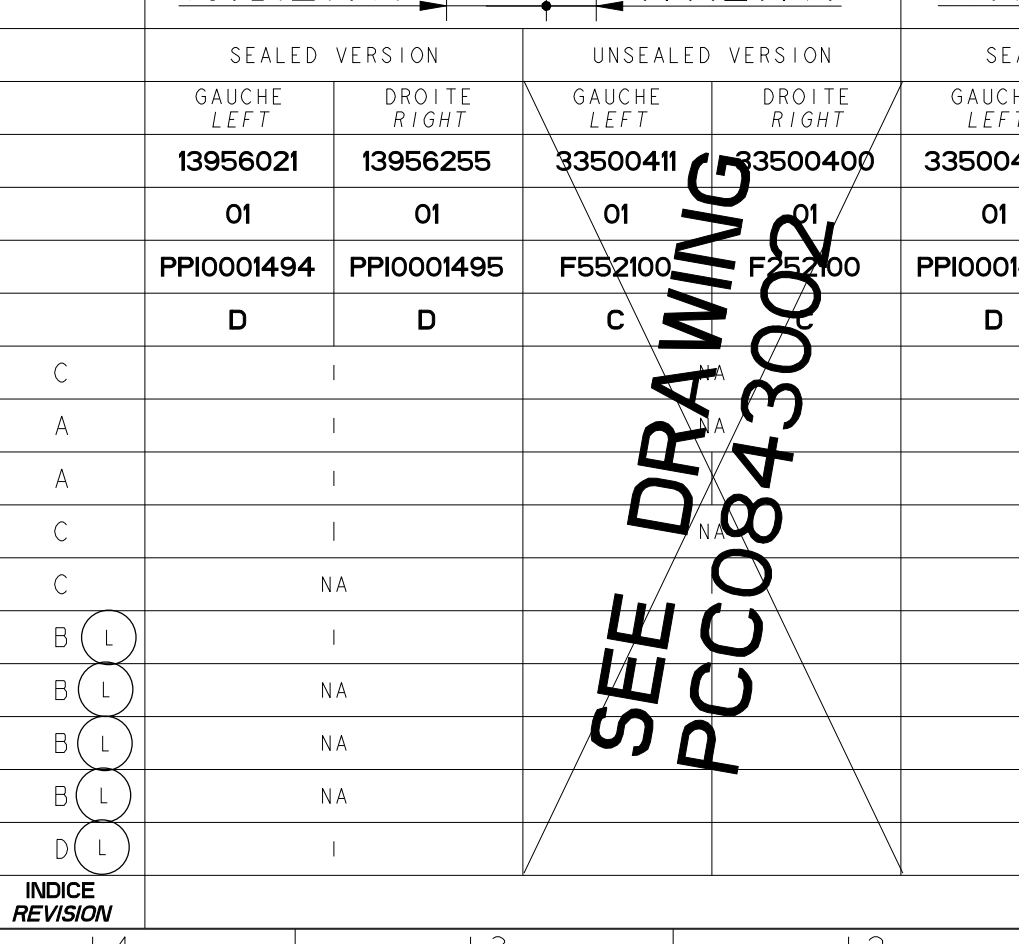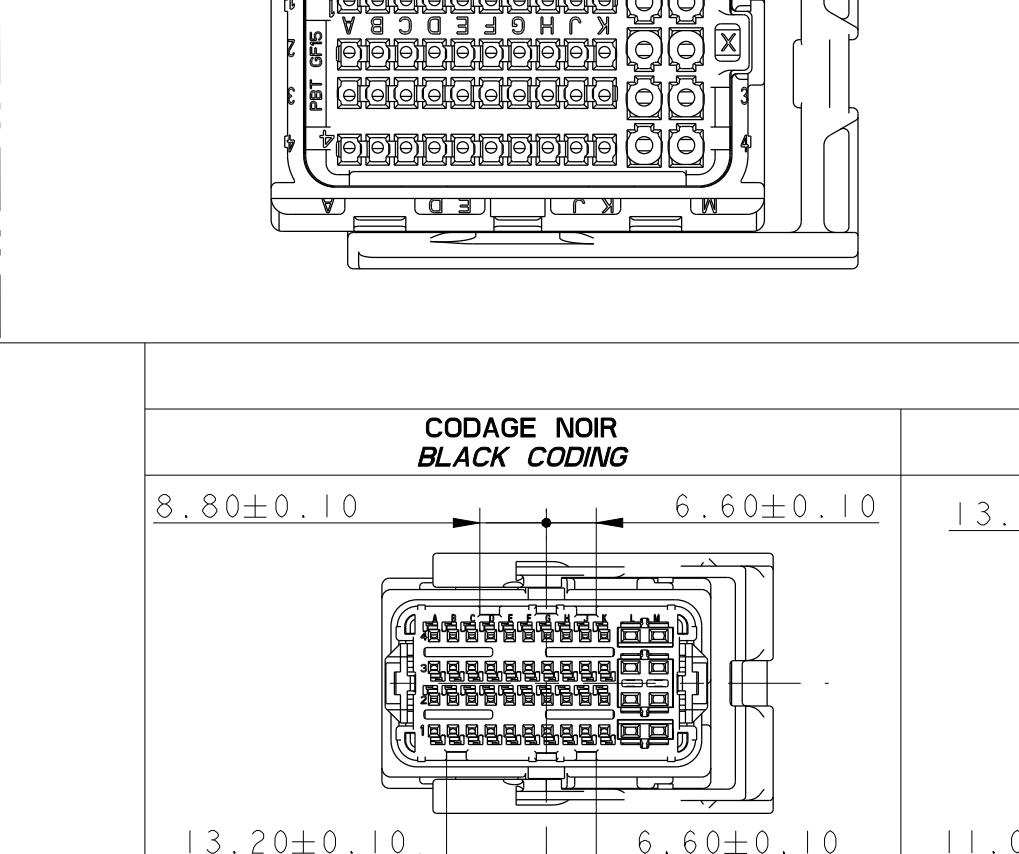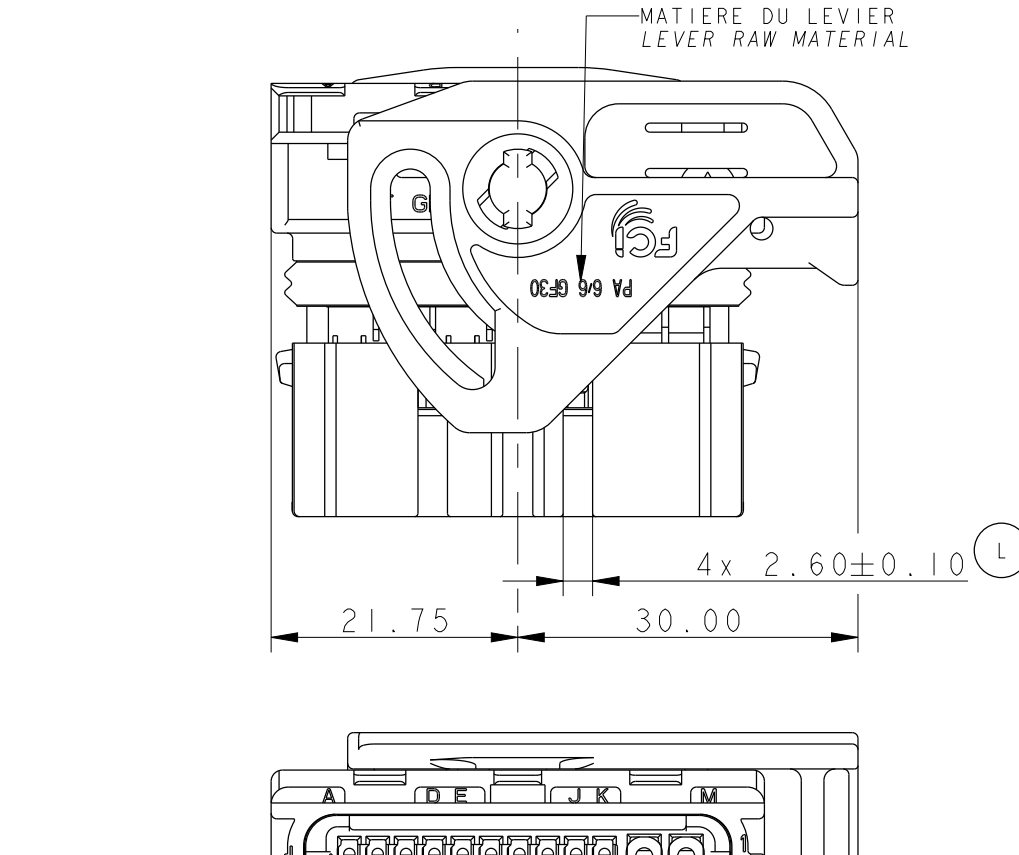[illegible]

Logo DELPHI
DELPHI'S LOGO

INDICATION SORTIE FAISEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

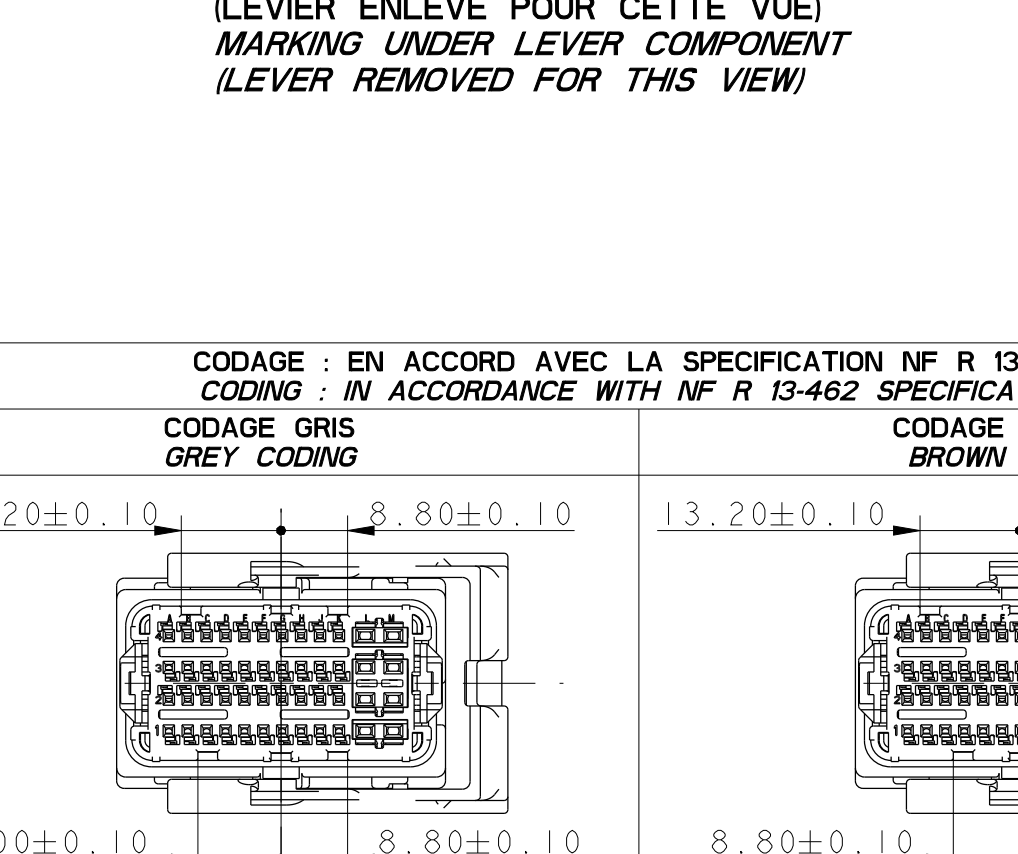
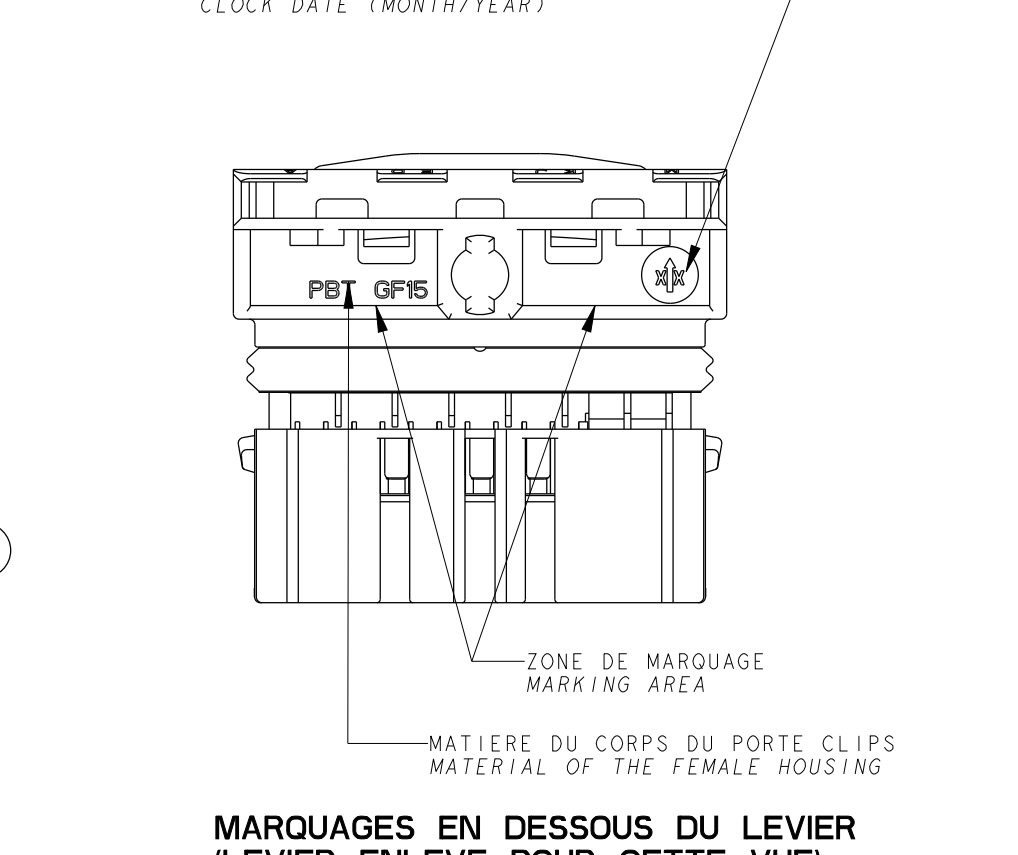
$\varnothing 34 - 40 \pm 0,30$

$38,20 \pm 0,25$

GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)

A



DATEUR (MOIS/ANNEE) _____







SEALED VERSION		UNSEALED VERSION		SEALED VERSION	
GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT
499	33500500	33500417	33500408	33500419	33500420
	01	01	01	01	01
496	PPI0001497	F7521000	F452000	F7650000	F8650000
	D	C		D	D
NA					NA
NA					NA
					NA
NA					
NA					NA

**SEE DRAWING
PCC0843002**

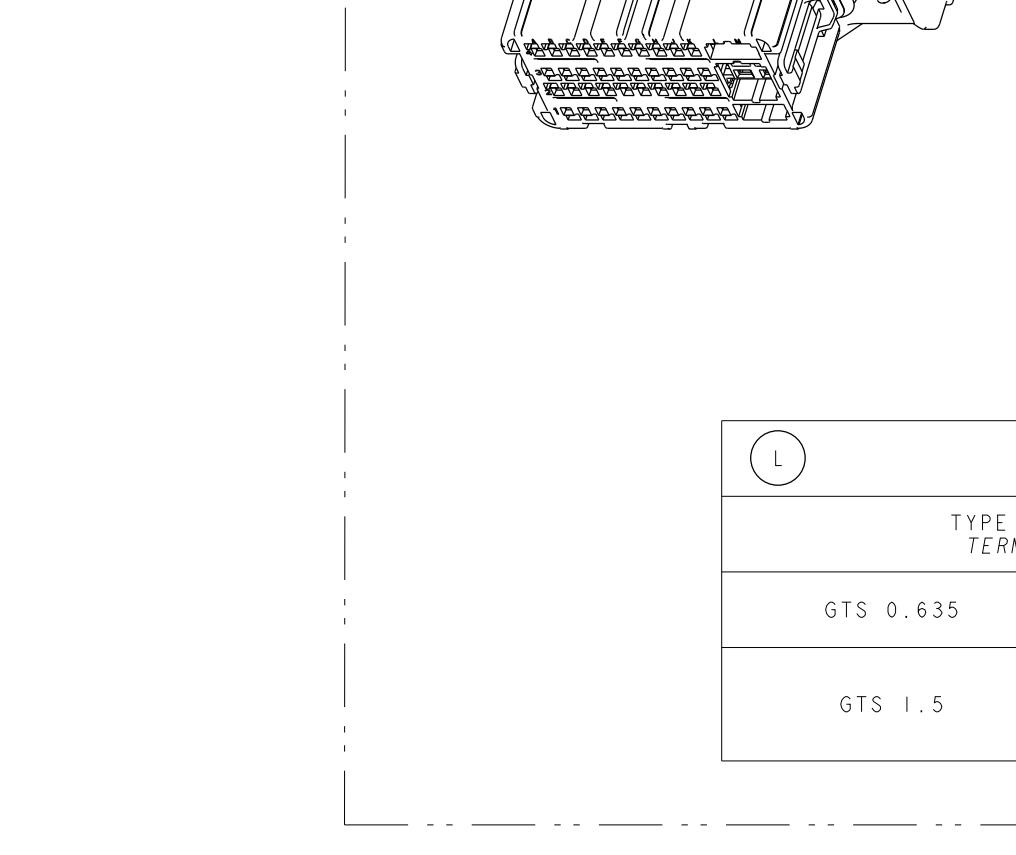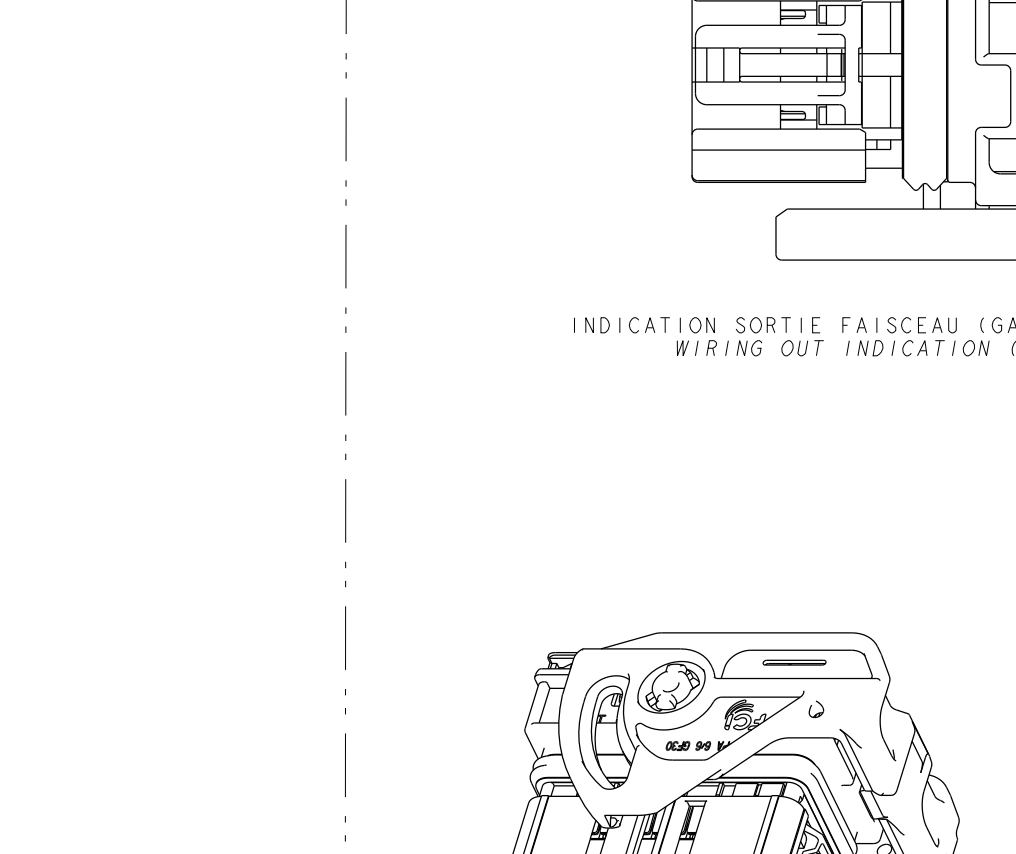


**QTE
ary**



62 DU		
ARRON CODING		
		
	CODAGE VERT GREEN CODING 	

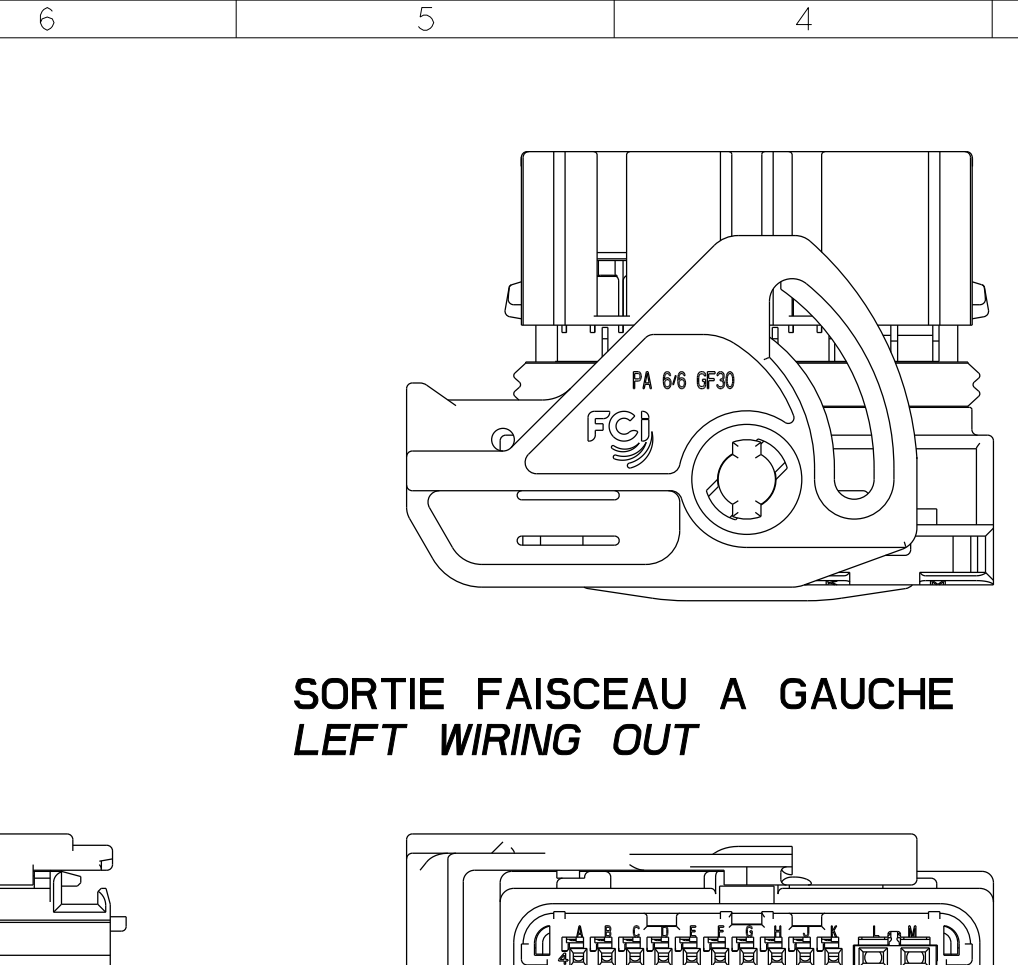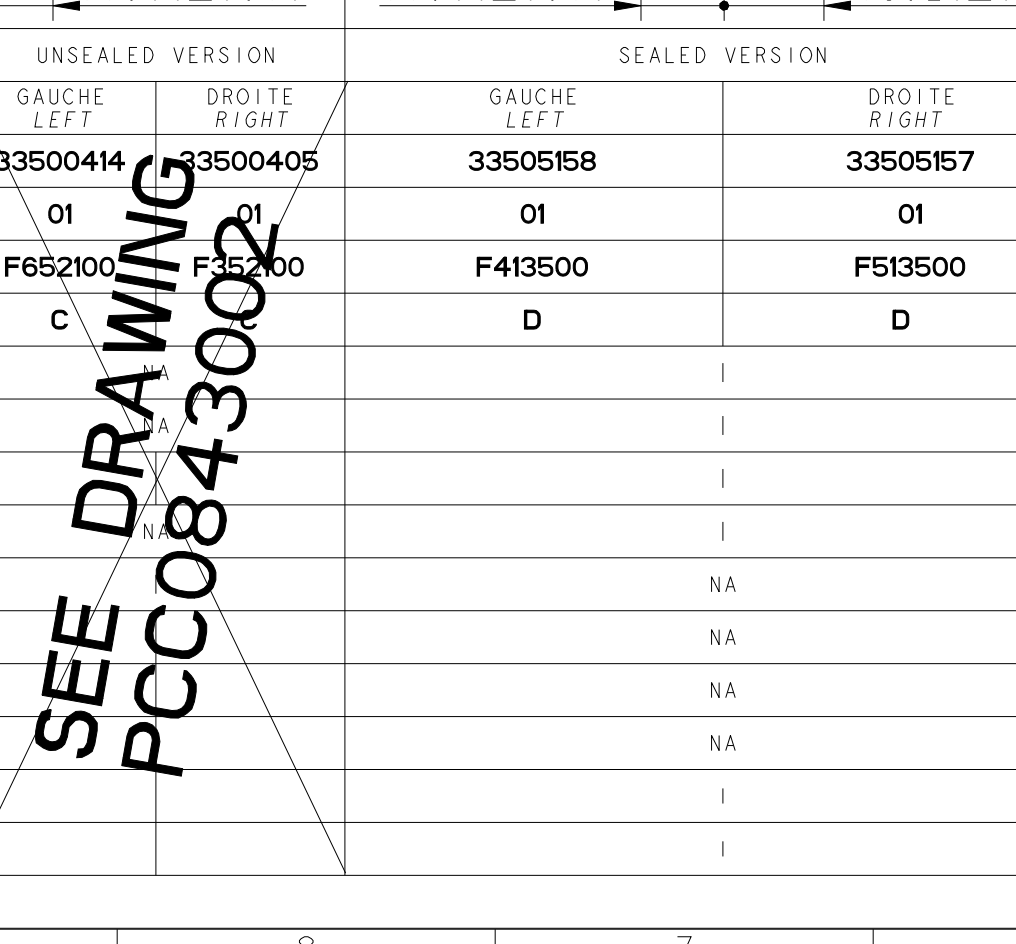

Technical drawings of the engine and fuel system components. The top left shows a side view of the fuel system with labels 'X' and 'X' and the text '(UCHE) (LEFT)'. The top right shows a top view of the fuel system with labels 'X' and 'X' and the text '(UCHE) (LEFT)'. The bottom drawing shows a front view of the engine with labels 'X' and 'X' and the text '(UCHE) (LEFT)'.

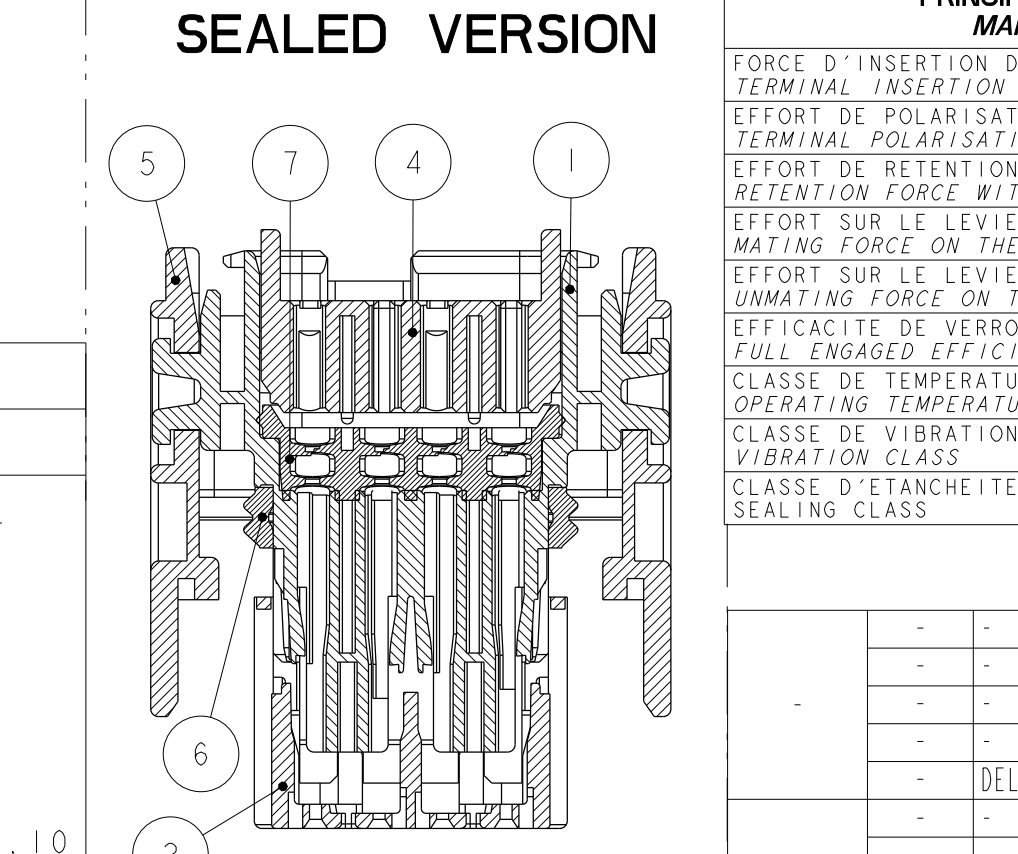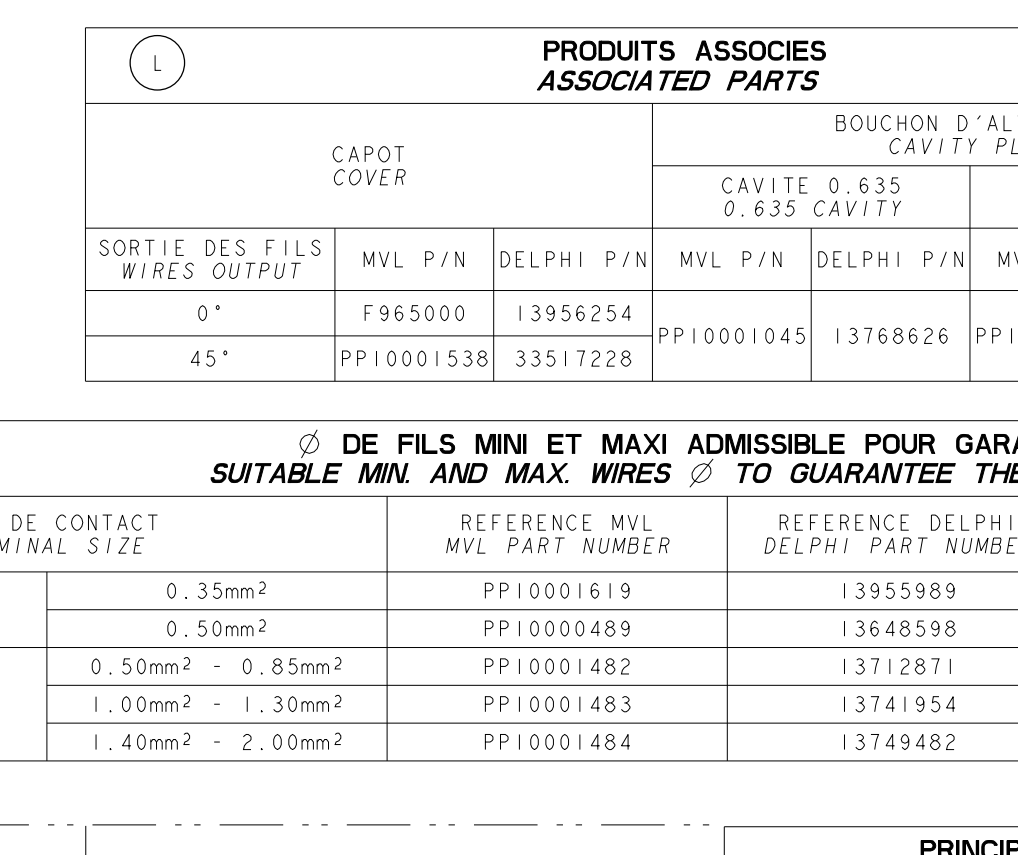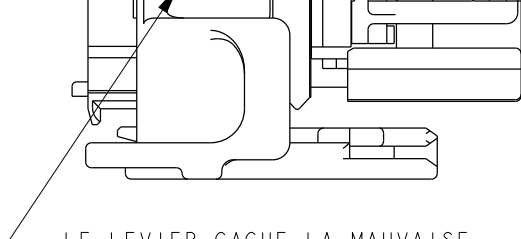[illegible]

LE LEVIER CACHE LA MAUVAISE
INDICATION DE SORTIE DE FAISCEAU
LEVER HIDE BAD WIRING OUT INDICATION

VEOLIS UG		CAHIER DES CHARGES SPECIFICATION		NF R 13-462 FE PS 07 023	
CAVITE 1,5 1,5 VAVITY		MISE EN OEUVRE APPLICATION SPECIFICATION DOSSIER DE PRECONISATION : PU 087 USER'S MANUAL: PU 087			
ZL P/N DELPHI P/N					
0001486 13826722					

MECHANICAL PROPERTIES		CT 0.635	CT 15
UN CONTACT FORCE		10N MAXI	12N MAXI
ION D'UN CONTACT A 90° ET 180° OW FORCE AT 90° AND 180°		24 MINI	30 MINI
AVEC DV H SECONDARY LOCK		80N MINI	100N MINI
R D'ACCOUPLEMENT PC/PL SLIDER DEVICE		65N MAXI	
R DE DESACCOUPLEMENT PC/PL HE SLIDER DEVICE		65N MAXI	
UILLAGE EMCY		200N MINI	
RE		-40°C / +125°C	
RE			
S			
		15 g	±0.5 Bar IPX9K (L)
PHI P/N ADDED			

EUR C04 112 F29