

DETAIL ALVEOLES 15
DETAIL CAVITIES 15


8 x 1.00 ± 0.05

0.20 (M)

8 x 1.80 ± 0.05

0.20 (M)

SCALE 5:1 / 5:1

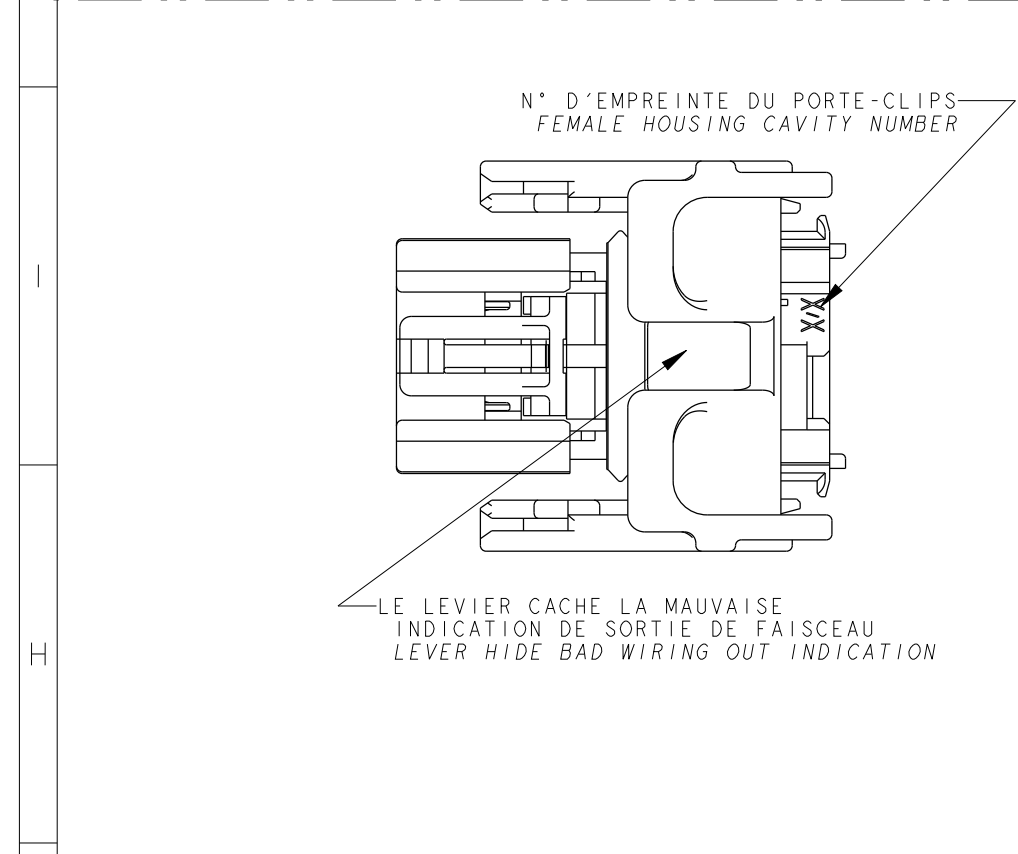


DETAIL ALVEOLES 0.635
DETAIL CAVITIES 0.635

40 x 0.80 ± 0.05
0.20 (M) A B C

40 x 0.90 ± 0.05
0.20 (M) A B C

E F G

ECHELLE 5:1 / SCALE 5:1

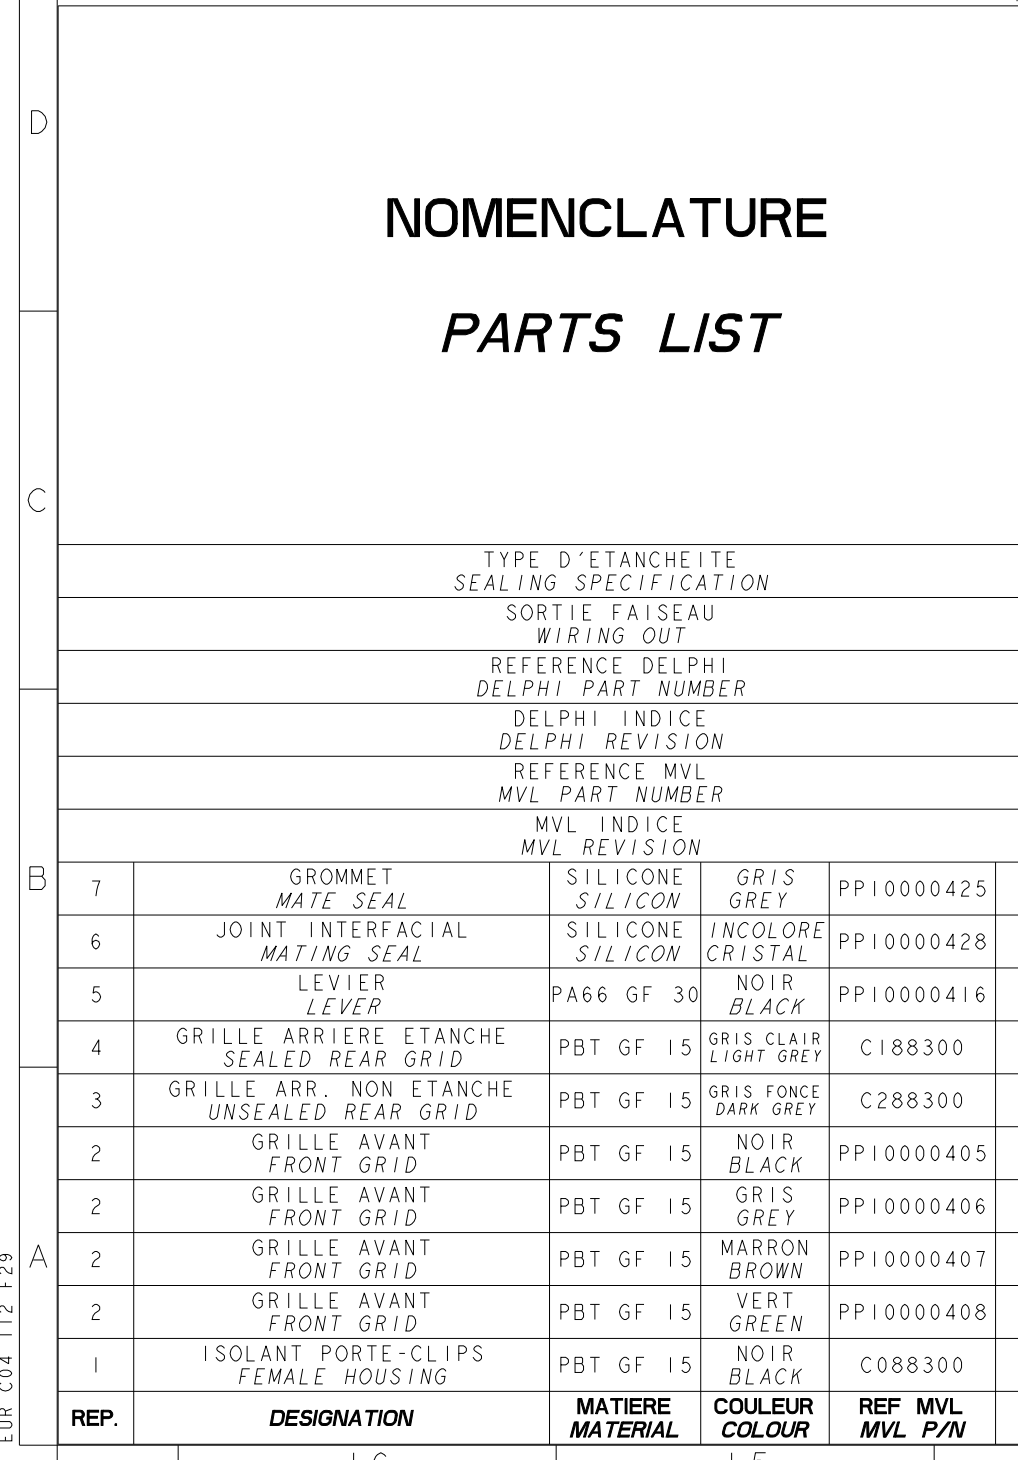


Technical drawing of the right wiring out (SORTIE FAISCEAU A DROITE) showing a perspective view and a detailed dimensioned view.

Perspective View: Shows the lever cavity number (N° D'EMPREINTE DU LEVIER / LEVER CAVITY NUMBER) and the X1/2 marking.

Dimensioned View: Provides precise measurements for the wiring out assembly.

Dimensions:

- Overall width: 43.50
- Width of terminal block: 39.75 ± 0.11
- Terminal block width tolerance: 0.10
- Distance from terminal block to center: 2.650
- Distance from terminal block to right edge: 14.85
- Distance from terminal block to right edge (alternative): 22.50
- Distance from terminal block to right edge (alternative): 3.70
- Distance from terminal block to right edge (alternative): 3.50
- Distance from terminal block to right edge (alternative): 8.40 ± 0.10
- Distance from terminal block to right edge (alternative): 20.70 ± 0.11
- Distance from terminal block to right edge (alternative): 10.10
- Distance from terminal block to right edge (alternative): 12.60
- Distance from terminal block to right edge (alternative): 6.30

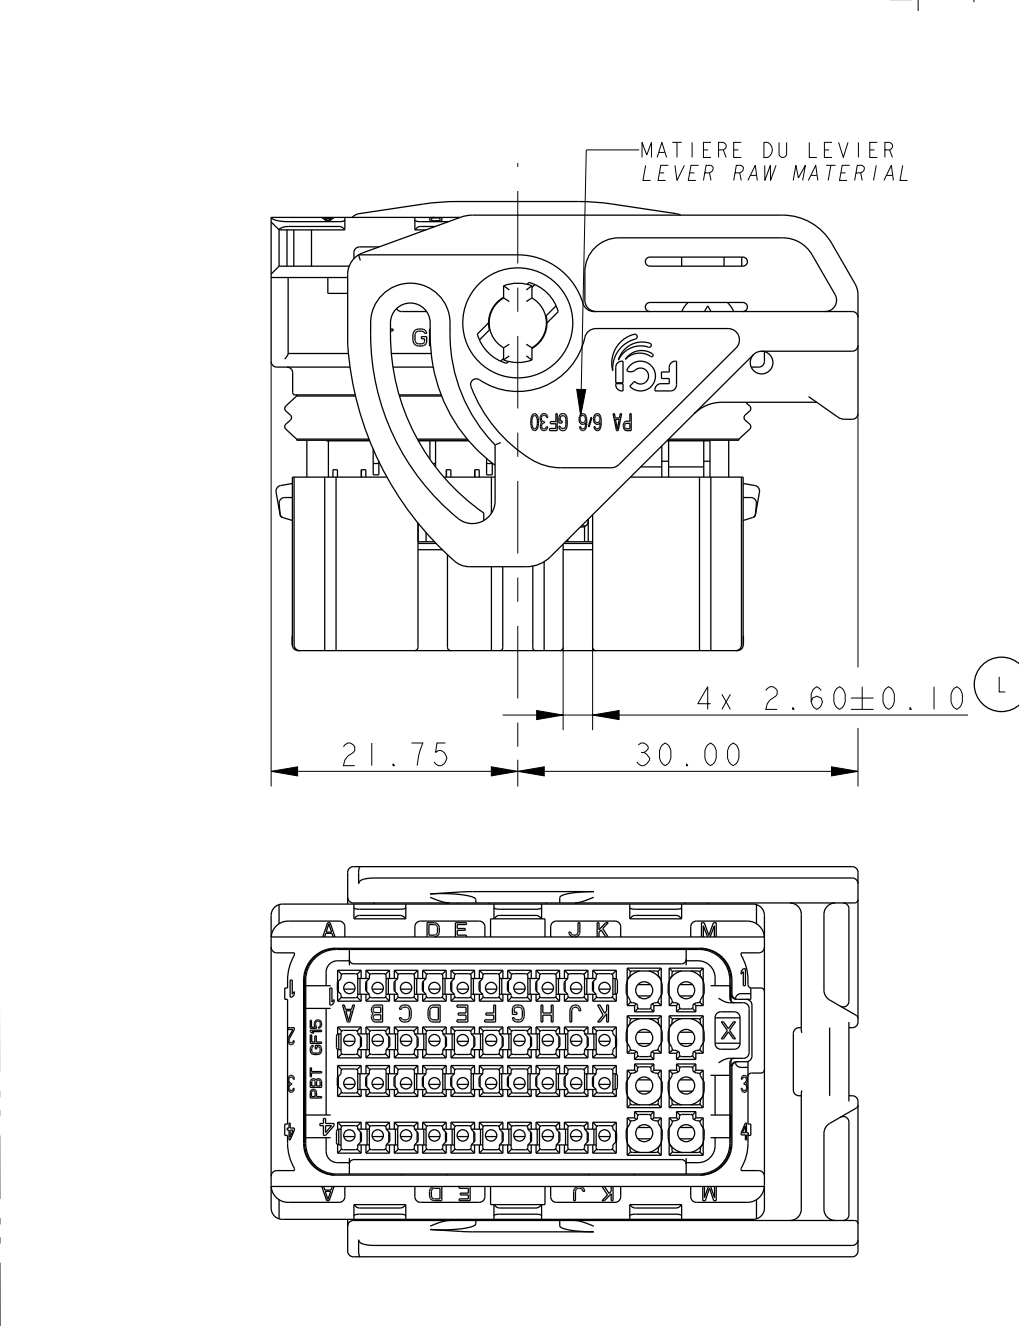

INDICE DU PORTE-CLIPS ASSEMBLE
REVISION LEVEL OF FEMALE CONNECTOR

ZONE DE MARQUAGE
MARKING AREA

**MARQUAGES EN DESSOUS DU LEVIER
(LEVIER ENLEVE POUR CETTE VUE)
(MARKING UNDER LEVER COMPONENT
(LEVER REMOVED FOR THIS VIEW))**


LOGO DELPHI
DELPHI'S LOGO

INDICATION SORTIE FAISCEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

38.20 ± 0.25
GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)
GRID PRE-LOCKED (DELIVERY POSITION)

34.40 ± 0.30
0.20 C


A

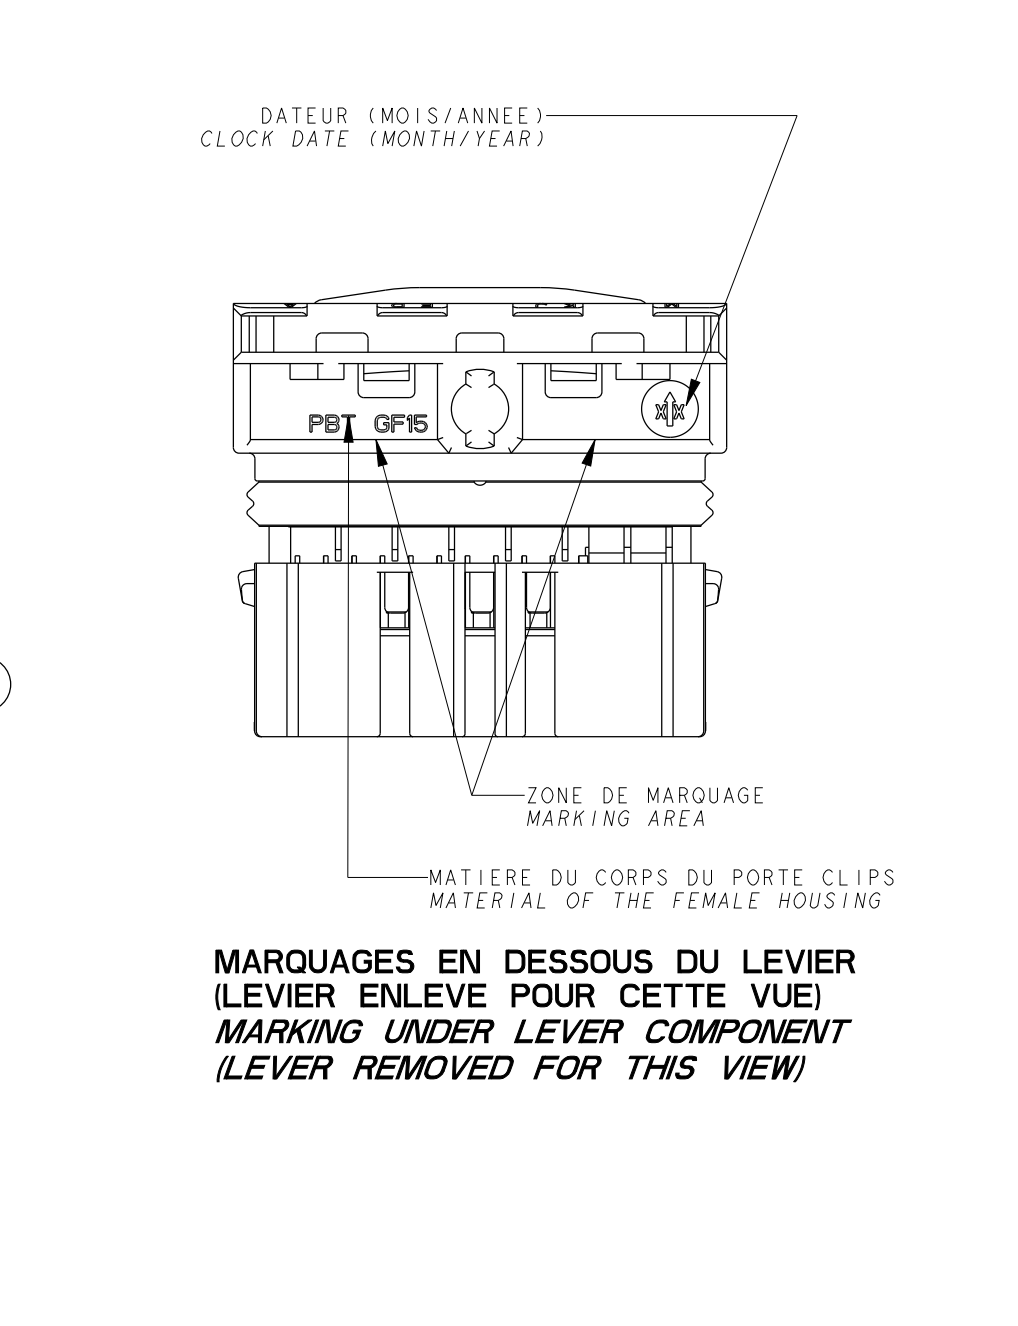

CODAGE : EN ACCORD AVEC LA SPECIFICATION NF R 13
 CODING : IN ACCORDANCE WITH NF R 13-462 SPECIFICATION
 CODAGE GRIS
 GREY CODING

INDICATION SORTIE FAISCEAU (GAUCHE)
 WIRING OUT INDICATION (LEFT)

Technical drawing showing the wiring harness and fuse block assembly. The drawing includes a side view of the fuse block and a top view of the wiring harness. The side view shows the fuse block with a label 'KAB 100 A' and a warning symbol. The top view shows the wiring harness with multiple wires and a label 'KAB 100 A'.

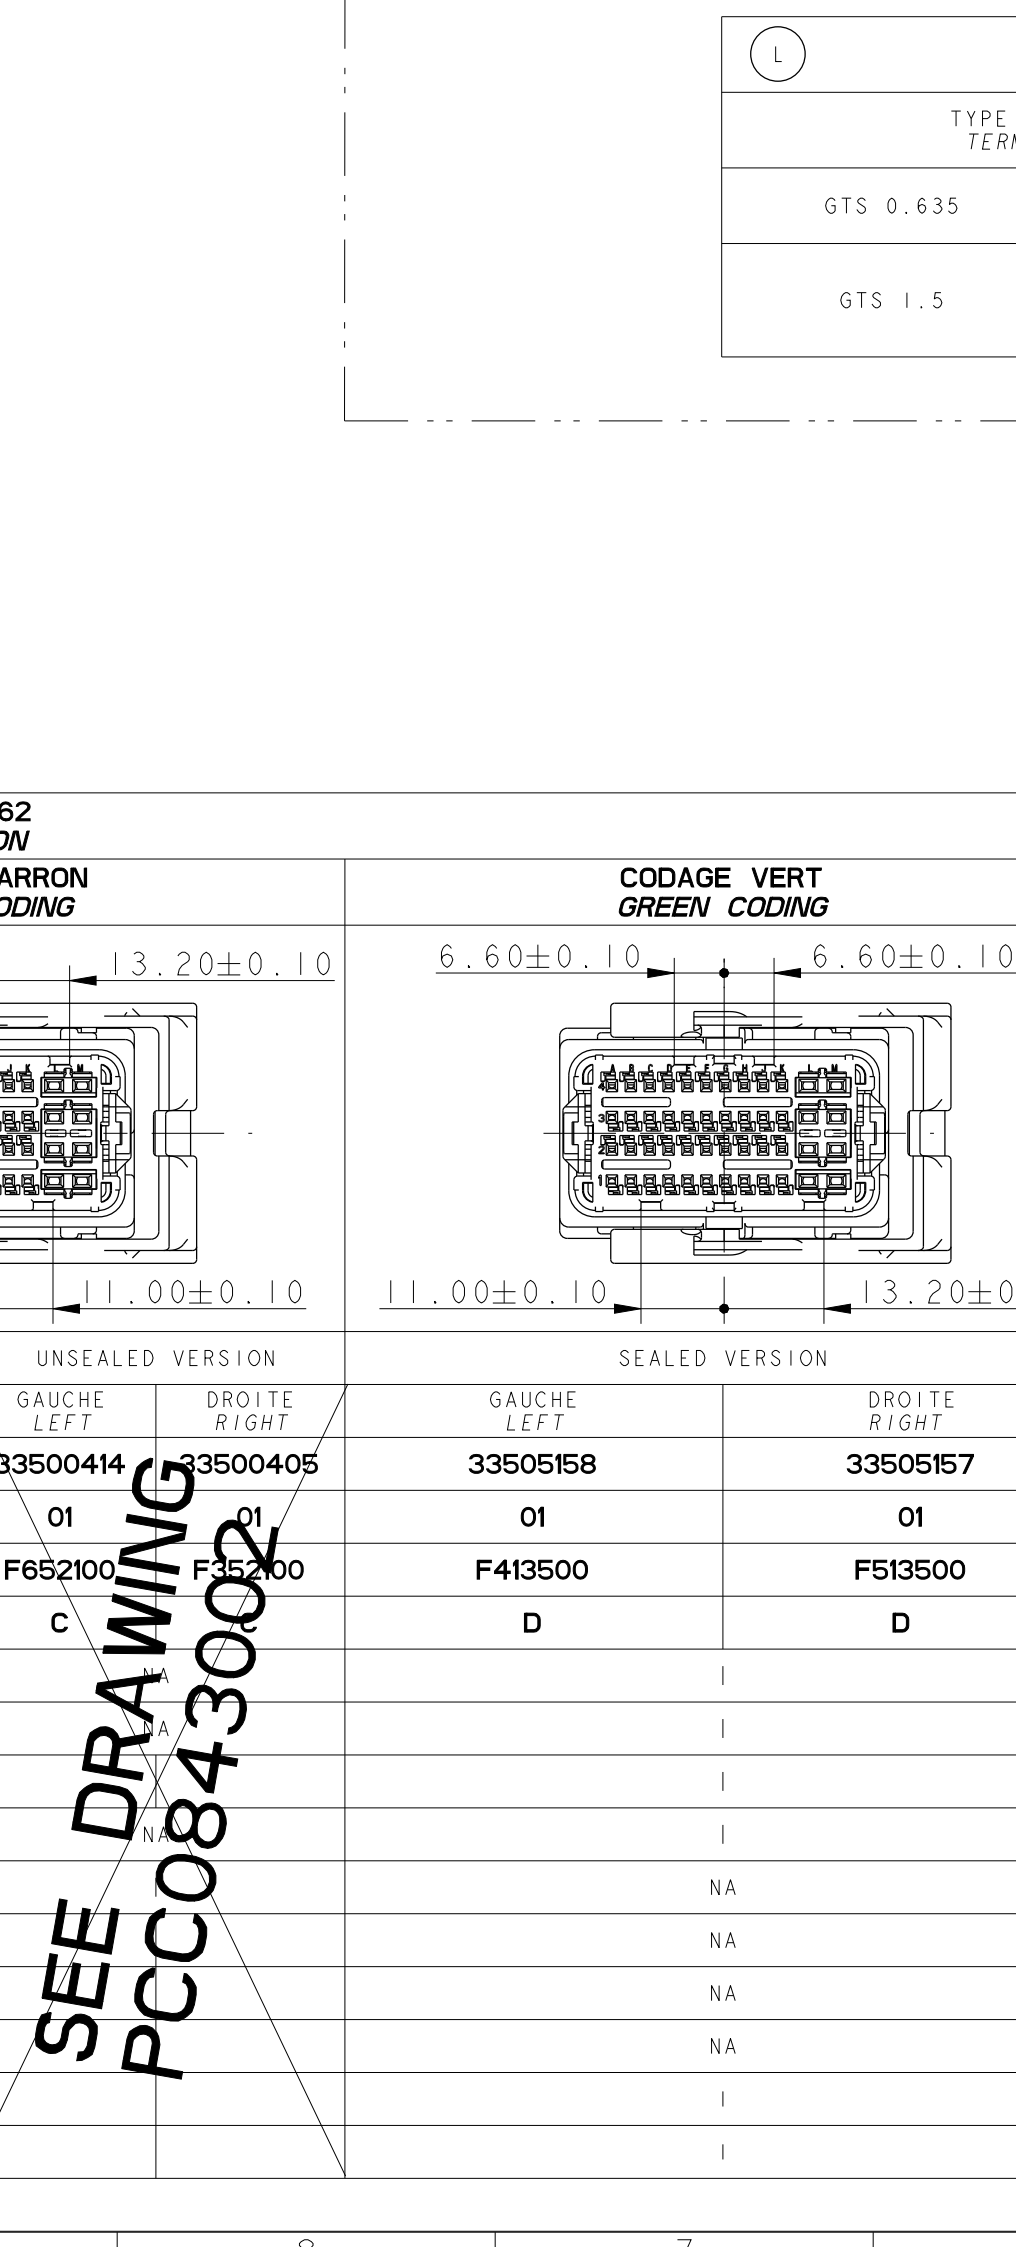

6 5 4 3 2 1

PA 56 GF30

FC

SORTIE FAISCEAU A GAUCHE
LEFT WIRING OUT

XX

XX

X/X

CAPOT COVER		PRODUITS ASSOCIES ASSOCIATED PARTS			
		BOUCHON D'AL CAVITY PL			
		CAVITE 0.635 0.635 CAVITY			
SORTIE DES FILS WIRES OUTPUT	MVL P/N	DELPHI P/N	MVL P/N	DELPHI P/N	MVL P/N
0°	F965000	13956254	PP10001045	13768626	PP10001045
45°	PP10001538	33517228			

[illegible]

LE LEVIER CACHE LA MAUVAISE
INDICATION DE SORTIE DE FAISCEAU
LEVER HIDE BAD WIRING OUT INDICATION

SPECIFICATION DE CONDITIONNEMENT
PACKAGING SPECIFICATION

FE PA 06 013

CAHIER DES CHARGES
SPECIFICATION

NF R 13-462
FE PS 07 023

MISE EN OEUVRE
APPLICATION SPECIFICATION

DOSSIER DE PRECONISATION : PU 087
USER'S MANUAL: PU 087

DESIGN OF THE PRODUCT <table border="1"> <tr> <td> Ø MINIMUM Ø MAXIMUM </td> <td> Ø MINIMUM Ø MAXIMUM </td> </tr> <tr> <td>1.30</td> <td>1.50</td> </tr> <tr> <td>1.40</td> <td>1.70</td> </tr> <tr> <td>2.00</td> <td>2.20</td> </tr> <tr> <td>2.10</td> <td>2.40</td> </tr> <tr> <td>2.30</td> <td>2.80</td> </tr> </table>				Ø MINIMUM Ø MAXIMUM	Ø MINIMUM Ø MAXIMUM	1.30	1.50	1.40	1.70	2.00	2.20	2.10	2.40	2.30	2.80
Ø MINIMUM Ø MAXIMUM	Ø MINIMUM Ø MAXIMUM														
1.30	1.50														
1.40	1.70														
2.00	2.20														
2.10	2.40														
2.30	2.80														
MECHANICAL PROPERTIES A 90° ET 180° IND 180° PC/PL PC/PL 65N MAXI 65N MAXI 200N MINI -40°C / +125°C 15 g ±0.5 Bar 1PX9K		CT 0635 10N MAXI 24 MINI 80N MINI CT 15 12N MAXI 30 MINI 100N MINI													
ADDED IN TABLE (B WAS A) MAILED VERSION CONNECTOR AND HOUSING (D WAS C) VERSIONS, WHICH ARE ONLY PRODUCED IN A VERSION TO BE ACCORDANCE WITH OTHER CUSTOMER DRAWINGS CLOSING FOR AUTOMATIC CONTROL CHANGE DESCRIPTION MODIFICATION RIGHT: DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED. REVISED DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DELPHI COMPANY CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND COMMUNICATION OF THIS DRAWING OR ANY PART OF IT, WITHOUT THE WRITTEN PERMISSION OF DELPHI CORPORATION, IS PROHIBITED. DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE EPRON, FRANCE ISO PRODUCTION PRODUCTION ISO REV. 1 APPROVAL LEVEL APPROVED DATE 10/10/2000 SCALE 1:1															

NOMENCLATURE						
PARTS LIST						
TYPE D'ETANCHEITE						
SEALING SPECIFICATION						
SORTIE FAISAU						
WIRING OUT						
REFERENCE DELPHI						
DELPHI PART NUMBER						
DELPHI INDICE						
DELPHI REVISION						
REFERENCE MVL						
MVL PART NUMBER						
MVL INDICE						
MVL REVISION						
7	GROMMET MATE SEAL	SILICONE SILICON	GRIS GRAY	PP10000425		C
6	JOINT INTERFACIAL MATING SEAL	SILICONE SILICON	INCOLORE CRYSTAL	PP10000428		A
5	LEVIER	P466 GF 30	NOIR BLACK	PP10000416		A
4	GRILLE ARRIERE ETANCHE SEALED REAR GRID	PBT GF 15	GRIS CLAIR LIGHT GREY	C188300		C
3	GRILLE ARR. NON ETANCHE UNSEALED REAR GRID	PBT GF 15	GRIS FONCE DARK GREY	C288300		C
2	GRILLE AVANT FRONT GRID	PBT GF 15	NOIR BLACK	PP10000405		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	GRIS GREY	PP10000406		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	MARRON BROWN	PP10000407		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	VERT GREEN	PP10000408		B (L)
1	ISOLANT PORTE-CLIPS FEMALE HOUSING	PBT GF 15	NOIR BLACK	C088300		D (L)
REP.	DESIGNATION	MATIERE MATERIAL	COULEUR COLOR	REF. MVL	MVL P/N	INDICE REVISION

CODAGE NOIR BLACK CODING				CODAGE GRIS GREY CODING				CODAGE MARRON BROWN CODING				CODAGE VERT GREEN CODING			
SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION			
GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT		
13956021	13956255	33500411	35004000	33500499	33500500	33500417	35004008	33500419	33500420	33500414	35004005	33505158	33505157		
O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1		
PPI0001494	PPI0001495	F552100	F552100	PPI0001496	PPI0001497	F752100	F452100	F765000	F865000	F652100	F352100	F413500	F513500		
D	D	C		D	D	C		D	D	C		D	D		
I				I				I				I			
I				I				I				I			
I				I				I				I			
NA				NA				NA				NA			
I				NA				NA				NA			
NA				I				NA				NA			
NA				NA				I				NA			
NA				NA				NA				I			
I								I				I			
QTE QTY															

SEALED VERSION

UNSEALED VERSION

**SEE DRAWING
PCC0843002**

[illegible][illegible]