
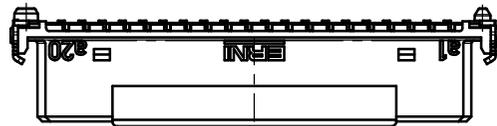
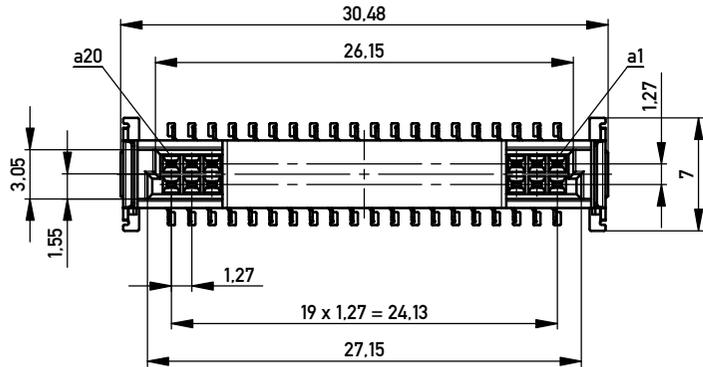


Verpackt im Gurt nach DIN IEC 60286-3  
 Tape on Reel Packaging according to DIN IEC 60286-3  
 Verpackungseinheit: 280 Stück  
 Packaging unit: 280 pcs




Anforderungsstufe 1  
 Performance Level 1

Kontaktbereich vergoldet  
 Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm  
 Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm  
 Coplanarity Area of Termination ≤ 0,1 mm

Leiterplatten-Layout Vorschlag für SMT  
 PCB-Layout Proposal for SMT

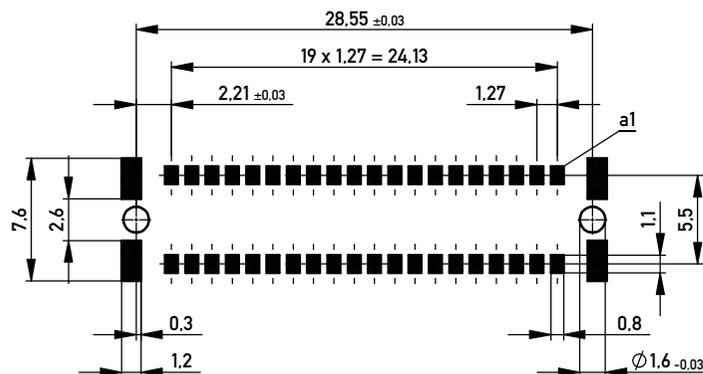

Abspulrichtung - Reel off Direction

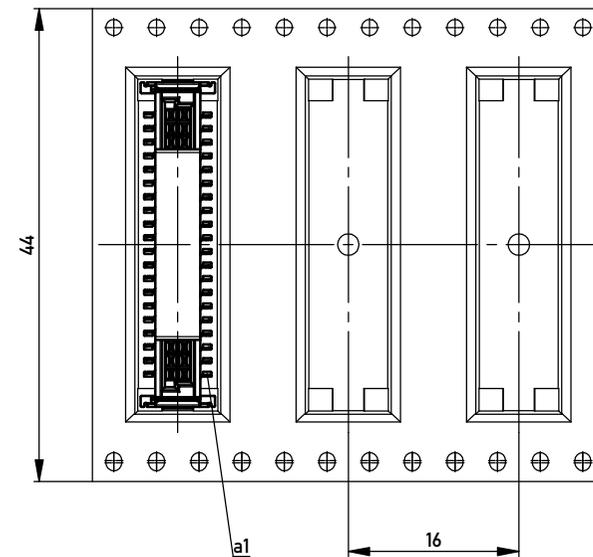

BA 7-13 - 8mm Bauhöhe  
 type7-13 - low profile

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 16100 to be observed.

|  |            |   |                      |  |     |
|--|------------|---|----------------------|--|-----|
| Information:   |            | Tolerances  | All Dimensions in mm | Scale  | 3:1 |
| All rights reserved.<br>Only for Information.<br>To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. |            | Subject to modification without prior notice.<br>Drawing will not be updated. |                      | Designation<br><b>Federl. SMC-B 40-SMD-BA7-13</b><br><b>Female SMC-B 40-SMD-type7-13</b> |     |
| www.ERNI.com   |            | 204632  |                      | I<br>A3  |     |
| b  | 15.01.2014 | Class   |                      | SMCB   |     |
| Index  | Date       |   |                      |  |     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[204632](#)