


4

3

2

1

LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	APVD
			B	REV PER ECO-06-006262	16MAR06	RG MP

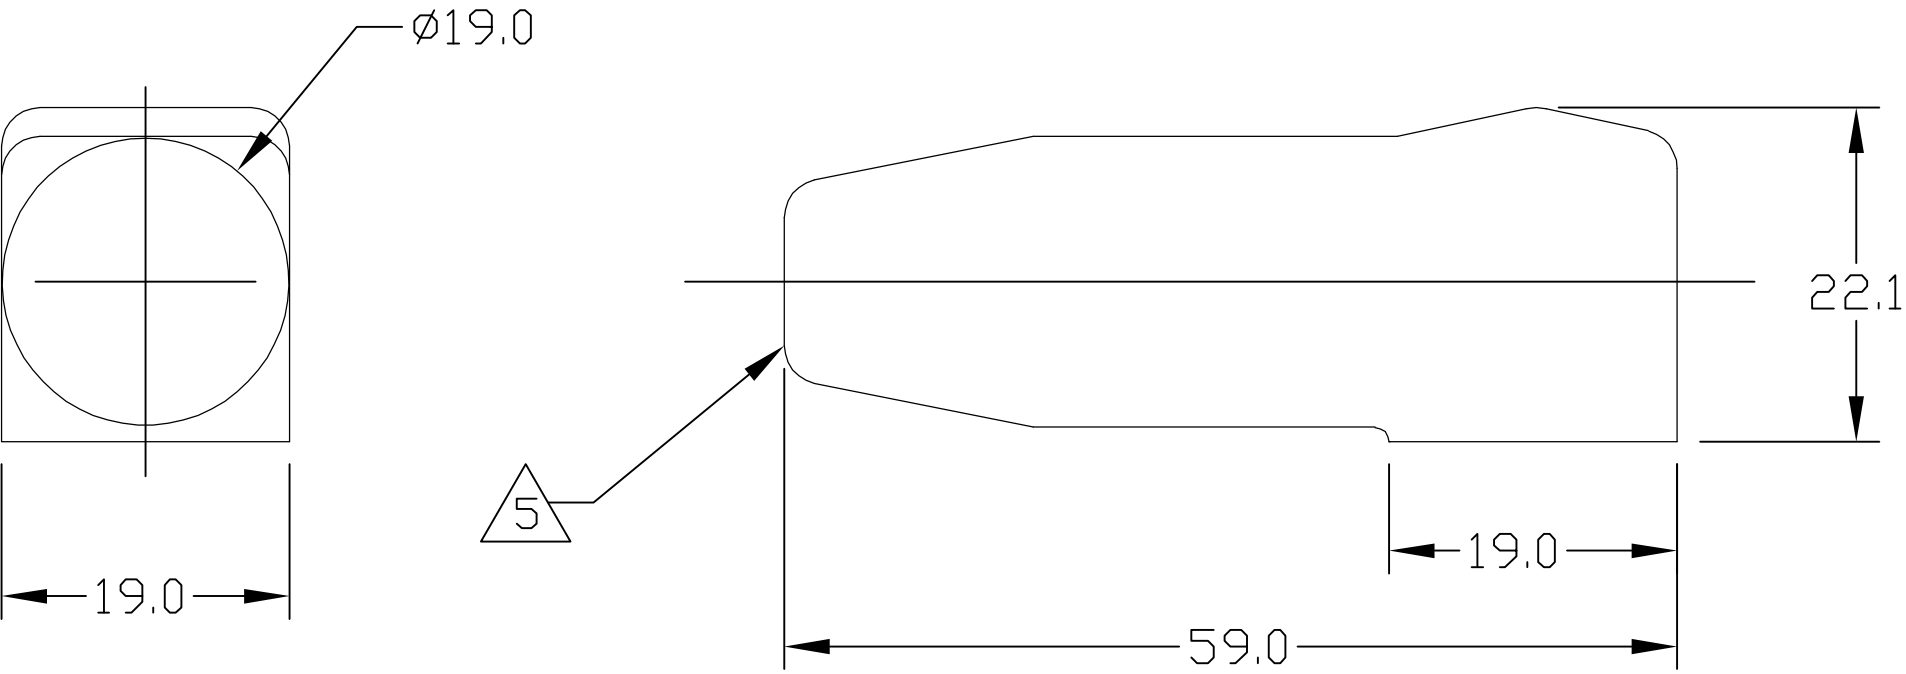


- 5 CABLE ENTRY OF BOOT IS MOULDED SOLID AND CROPPED TO SUIT CABLE USED BY CUSTOMER.
- PART NUMBER CHANGES AND OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.
 - ITEMS PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON THE CONTAINER WITH THE FOLLOWING INFORMATION: PART NUMBER & DATE CODE OF MANUFACTURE.
 - FINISH: GLOSSY, CLEAN WITH NO INTERNAL & EXTERNAL BURRS.
 - MATERIAL: ALL COLORS TO BE FIRE RETARDANT GRADE PVC 55 SHORE A, RATED TO UL94V-0. COLORS: SEE TABLE

1766600-4	BLUE
1766600-3	GREY
1766600-2	RED
1766600-1	BLACK
TYCO PN:	COLOR

ELCON

RAPID LOCK

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.C.CANT/GRZYBOWSKI		16FEB05		tyco Electronics		Tyco Electronics Corporation					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK —		25FEB05		Harrisburg, PA 17105-3608					
		0 PLC ± —		APVD D.CHAU		NAME INSULATION BOOT SIZE #2 —							
		1 PLC ± .5		PRODUCT SPEC									
		2 PLC ± .25		—									
		3 PLC ± —		APPLICATION SPEC									
4 PLC ± —		—		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL —		FINISH —		WEIGHT —		A3		00779		C-1766600		—	
				CUSTOMER DRAWING				SCALE 1:1		SHEET 1 OF 1		REV B	