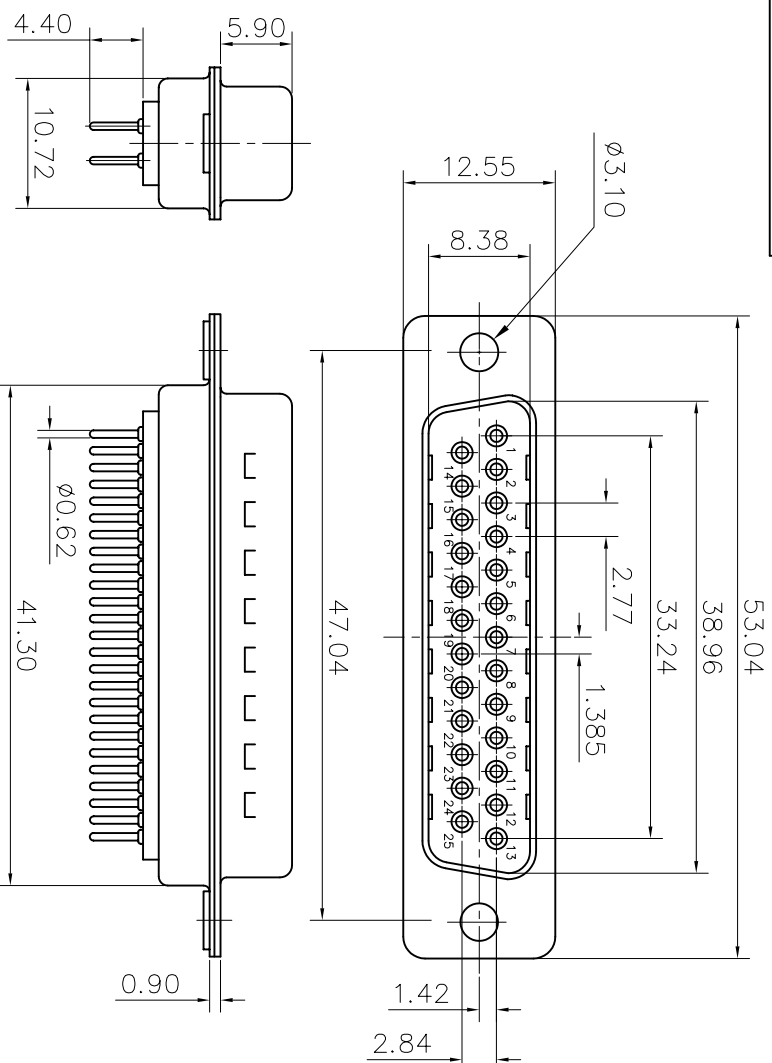


RECOMMENDED P.C.B LAYOUT

(TOLERANCE + / - 0.03)

Customer drawing

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A			10/19/07	

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
BODY : Glass filled thermoplastic.

Flame retarding to UL94 V-0 Color Black
CONTACTS : Brass.

TS : Brass.

Gold flash over 1.25um (50u") min nickel
ELECTRICAL : Voltage rating :1000 V RMS at 50 HZ

Current rating 3A.

Insulation resistance >1000 M Ohms

Contact resistance 20 mOhms max.

CLIMATIC : Temperature range -55°C up to 125°C

MARKING : Amphenol-...(Series No.)

Commercial reference

Manufacturing date

PRODUCT CODE

L 717 SD B 25 P OL2

RoHS Compliance

717: tinned shell +
dimples for plug

SD: standard density

Shell Size : B

Termination Straight for PCB

Contact type:
P: Male

Configuration: 25

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES		DRAWN		06/19/07	
U.S.		CHECKED		10/19/07	
METRIC		1/16" USING		0/19/07	
.X +/-		.XX +/-		.XXX +/-	
FRACTIONS +/-		DECIMALS +/-		ANGLES +/-	
2"		2"		2"	
FOR MATERIALS AND FINISHES		DRAWING FILE :		TITLE	
SEE NOTES		ANGLE OF PROJECTION		Stamped and Formed connector, SD series	
REMOVE SHARP EDGES				SIZE DRAWING NO. REV.	
DIMENSIONS				SCALE NONE SHEET 1 OF 1	
U.S.		INCHES		A4	
METRIC		MM		C L7175DB25POL2	