

STRADA-2X2-T4

IESNA Type IV beam for wider roads and large outdoor area

TECHNICAL SPECIFICATIONS:

Dimensions 50.0 mm

Height 7.7 mm

Fastening pin, screw

yes 🕕 **ROHS** compliant



Type Material Colour **Finish** Component

LEDil

STRADA-2X2-T4 Multi-lens **PMMA** clear

ORDERING INFORMATION:


» Box size: 480 x 280 x 300 mm

Component Qty in box MOQ MPQ Box weight (kg)


C13805_STRADA-2X2-T4 800 160 160 7.7

Published: 19/05/2020 Last update: 10/01/2020 Subject to change without prior notice 1/18



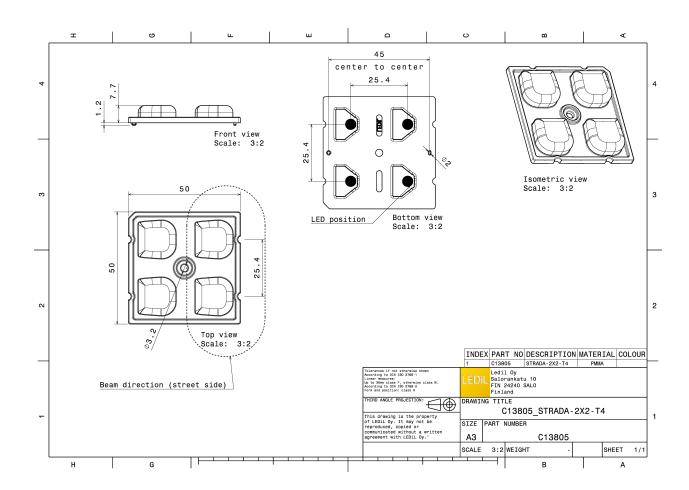

PHOTOMETRIC DATA (MEASURED):

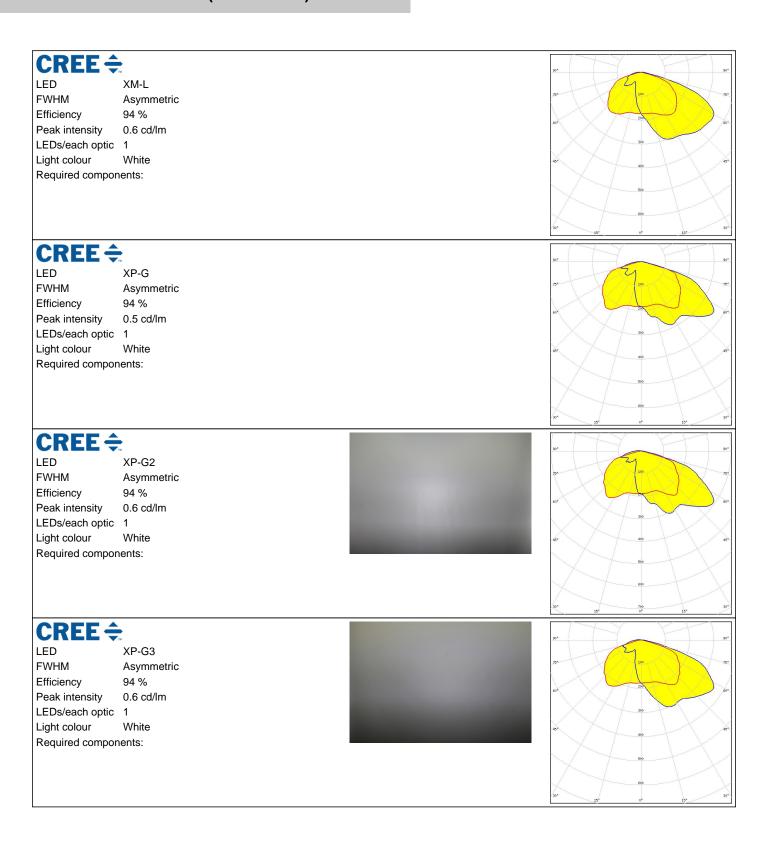

PHOTOMETRIC DATA (MEASURED):

CREE \$


LED XP-L HD FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1 Light colour White

Required components:



CREE &


LED XP-L HI FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1 Light colour White

Required components:



CREE 🕏

LED XP-L2


FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White Required components:



CREE 🕏

LED XT-E

FWHM Asymmetric

Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1 Light colour White

Required components:




PHOTOMETRIC DATA (MEASURED):



LED H35C1 (LEMWA33)

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1

Light colour White Required components:




MUMILEDS

LED LUXEON 5050 Round LES

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1


LEDs/each optic 1
Light colour White
Required components:



MUMILEDS

LED LUXEON MZ
FWHM Asymmetric
Efficiency 94 %


Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components:



DESCRIPTION LUMILEDS

LED LUXEON Q
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:






PHOTOMETRIC DATA (MEASURED):



LED LUXEON T **FWHM** Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1

White




LUMILEDS

Required components:

Light colour

LED **LUXEON TX FWHM** Asymmetric 94 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic 1


White Light colour Required components:



LUMILEDS

LED LUXEON V **FWHM** Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1


Light colour White Required components:



WNICHIA

LED NVSW219F **FWHM** Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1


White Light colour Required components:



PHOTOMETRIC DATA (MEASURED):

WNICHIA

LED NVSW319B **FWHM** Asymmetric 94 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White




WNICHIA

Required components:

LED NVSW3x9A **FWHM** Asymmetric 94 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour Required components:






OSRAM Opto Semiconductors

LED OSLON Square PC **FWHM** Asymmetric

Efficiency 94 % Peak intensity 0.6 cd/lm


LEDs/each optic 1 Light colour White Required components:



LED Fortimo FastFlex LED 2x8 DA G4

FWHM Asymmetric

Efficiency Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour Required components:




PHOTOMETRIC DATA (MEASURED):

PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White




PHILIPS

Required components:

LED Fortimo FastFlex LED 2x8 DAX G4


FWHM Asymmetric
Efficiency 94 %
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HiLOM RH16 (LH351C)


FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG


LED LH351B FWHM Asymmetric

Efficiency %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





PHOTOMETRIC DATA (MEASURED):

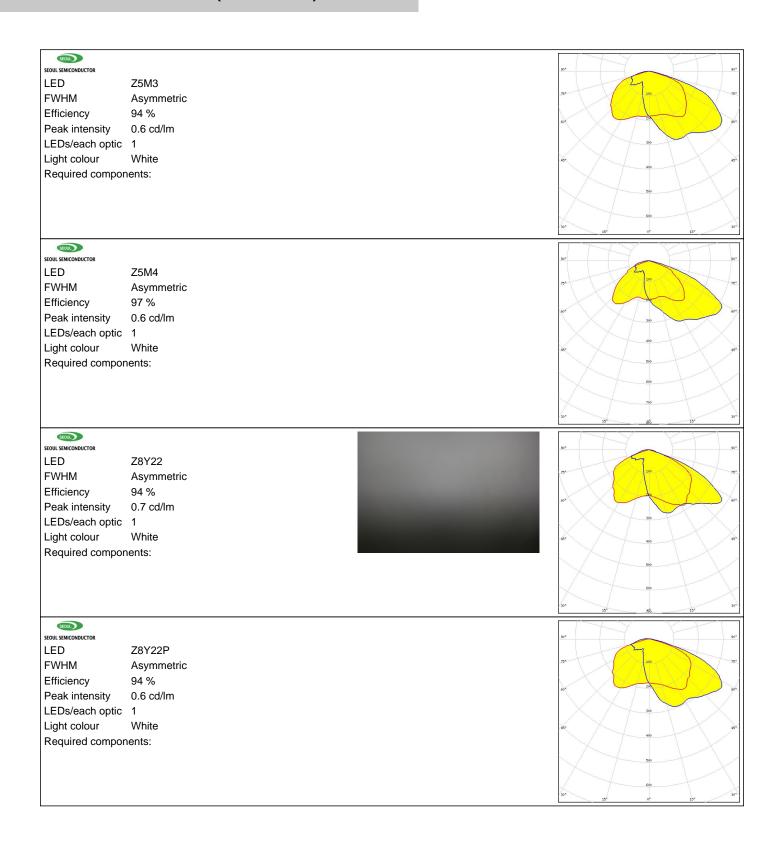




PHOTOMETRIC DATA (MEASURED):

TOSHIBA

Leading Innovation

LED TL1L4
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC


LED RLE 2x4 2000lm HP EXC2 OTD

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD


FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:




PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD


FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD


FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHOTOMETRIC DATA (SIMULATED):

CREE 🚓


XHP35 HD LED **FWHM** Asymmetric Efficiency 90 % LEDs/each optic Light colour White Required components:

CREE 🚓

LED XHP35 HI **FWHM** Asymmetric Efficiency 93 % LEDs/each optic 1 White Light colour Required components:


CREE 🚓

LED XM-L2 **FWHM** Asymmetric Efficiency 94 % LEDs/each optic 1 Light colour White Required components:



CREE \$

LED XP-G2 HE **FWHM** Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic White Light colour Required components:






PHOTOMETRIC DATA (SIMULATED):

CREE 🕏

LED XP-G3
FWHM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White Required components:

Transparent protective cover




MUMILEDS

LED LUXEON 3030 2D (Round LES)

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1


Light colour White Required components:



MUMILEDS

LED LUXEON 3030 2D (Square LES)

FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:




DESCRIPTION LUMILEDS

LED LUXEON 5050 Round LES

FWHM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Transparent protective cover




PHOTOMETRIC DATA (SIMULATED):

LUMILEDS

LED LUXEON 5050 Square LES


FWHM Asymmetric Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:



MUMILEDS


LED LUXEON V2 **FWHM** Asymmetric 94 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour

Required components:



WNICHIA


LED NV4WB35AM **FWHM** Asymmetric Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:



WNICHIA

LED NVSxx19B/NVSxx19C

FWHM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic White Light colour Required components:




PHOTOMETRIC DATA (SIMULATED):

Required components:

LED PrevaLED Brick HP 2x8


FWHM Asymmetric Efficiency 92 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White



OSRAM Opto Semiconductors


LED Duris S5 (2 chip) **FWHM** Asymmetric 94 % Efficiency Peak intensity 0.5 cd/lm

LEDs/each optic 1 White Light colour Required components:



OSRAM Opto Semiconductors


LED Duris S8 **FWHM** Asymmetric Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:



OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (2W version)

FWHM Asymmetric Efficiency 93 % Peak intensity 0.6 cd/lm LEDs/each optic White Light colour Required components:






PHOTOMETRIC DATA (SIMULATED):

OSRAM

LED

OSCONIQ P 3737 (3W version)

FWHM Asymmetric 94 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:




OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM Asymmetric 82 % Efficiency Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:


Transparent protective cover



OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3


FWHM Asymmetric Efficiency 92 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:



SAMSUNG

LED LH351D **FWHM** Asymmetric Efficiency 95 % 0.5 cd/lm Peak intensity

LEDs/each optic White Light colour Required components:





PHOTOMETRIC DATA (SIMULATED):



Light colour


LED

SEOUL DC 5050 6V

White

FWHM Asymmetric Efficiency 94 % 0.5 cd/lm Peak intensity LEDs/each optic

Required components:





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy