


REV.	DATE	DESCRIPTION
A	06/25/09	RELEASE TO MFG

- NOTES:
1. PACKAGE INDIVIDUALLY IN HEAT SEALED BAG. TAG IN BAG WITH "AMPHENOL CONNEX, 145104-05-XX.XX AND DATE CODE".
 2. CABLE ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORT AND OPEN.
 3. SHRINK DOWN THE HEAT SHRINK TUBE SUPPLIED WITH CONNECTOR AS SHOWN

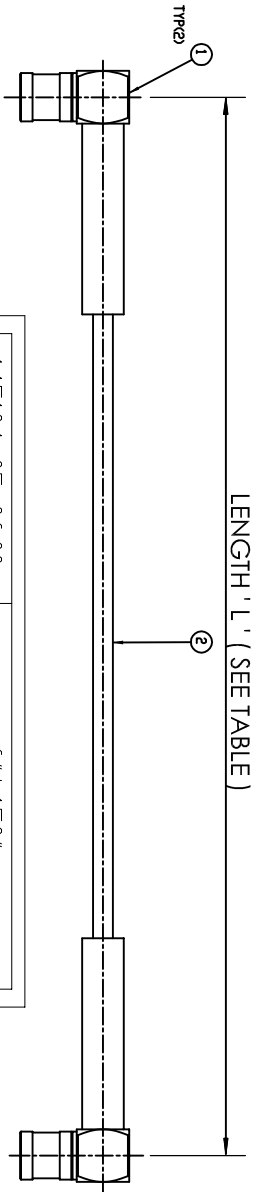

145104-05-06.00	6"±.150"
145104-05-12.00	12"±.150"
145104-05-18.00	18"±.250"
145104-05-24.00	24"±.250"
145104-05-36.00	36"±.500"
PART NUMBER	CABLE LENGTH (IN)

CUSTOM LENGTHS AVAILABLE UPON REQUEST
CONSULT THE FACTORY

DESIGN REQUIREMENTS:

☐ FREQUENCY : --- TO ---GHZ

☐ VSWR ----- : 1 MAX

☐ INS. LOSS ----- dB MAX

☒ CONTINUITY

☒ HI-PDT : 500 VRMS

☐ OTHER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN	KARTHIK		06/25/09					
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED								
						ISSUED								
						SHEET	1 OF 1							
2	RG 179/U CABLE	9-881-005	BLACK	A/R		PART NO.			SMB R/A TO SMB R/A PLUG 75 OHM USING RG 179/U CABLE ASSEMBLY					
1	SMB R/A PLUG , 75 OHM	142194-75		2		PART NO.								
	DESCRIPTION	PART NO.	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE \\Cable Assy\145104-05-XX.XX	DWG. NO.	145104-05-XX.XX.DWG	REV	A	SIZE	B	SCALE	NA