
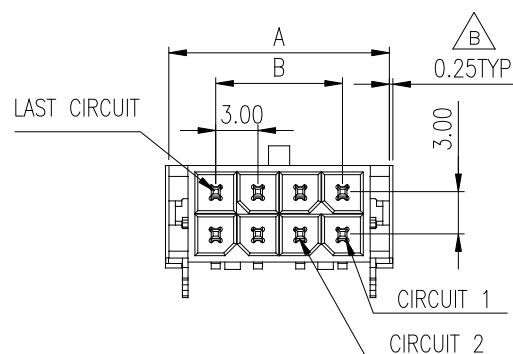



PRODUCT NUMBER
SEE PART NO. SCHEME



DIMENSION TABLE


POS	A	B	C	D
02	6.65	NA	4.30	6.74
04	9.65	3.00	7.30	
06	12.65	6.00	10.30	1.60
08	15.65	9.00	13.30	
10	18.65	12.00	16.30	
12	21.65	15.00	19.30	
14	24.65	18.00	22.30	
16	27.65	21.00	25.30	
18	30.65	24.00	28.30	
20	33.65	27.00	31.30	
22	36.65	30.00	34.30	1.60
24	39.65	33.00	37.30	

PART NUMBER SCHEME:
10137925-XX X X LF

NO OF POS.
02: 2 POS.
24: 24 POS.

HSG MATERIAL
1. LCP, GLOW WIRE COMPATIBLE
2. LCP, NON GLOW WIRE COMPATIBLE

CONTACT PLATING
1. TIN
2. GOLD FLASH
3. 15u" Au, TIN ON SOLDER TAILS
4. 30u" Au, TIN ON SOLDER TAILS

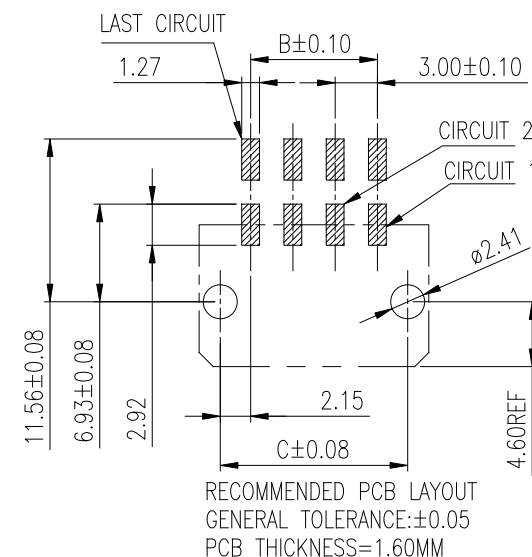

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ±0.05
PCB THICKNESS=1.60MM

NOTES:

- MATERIALS:
HOUSING: OPTIONAL, UL94V-0, HALOGEN FREE, COLOR: BLACK
TERMINAL: COPPER ALLOY
HOLD DOWN: COPPER ALLOY
- FINISH:
TERMINAL: OPTIONAL
HOLD DOWN: MATTE TIN
UNDER PLATING: NICKEL OVERALL
- PRODUCT SPECIFICATION: GS-12-1177
- PACKAGE SPECIFICATION: GS-14-2359
- THIS PART MATES WITH FCI RECEPTACLE WIRE CONNECTOR 10127716.
- THIS PART IS APPLICABLE FOR REFLOW PROCESS WITH 260°C PEAK TEMPERATURE FOR 10 SECONDS.

mat'l. code				surface	tolerance	projection	product family		
				✓			MINITEK PWR3.0		
ltr	ecr no	dr	date	tolerances unless otherwise specified		mm	title		
A		TAI	2015-11-30	angles	X.X ±0.3		MINITEK PWR3.0 R/A HEADER, DUAL ROW		
B	ELX-T-24982	TAI	2016-09-21	linear	X.XX ±0.2		SMT TAILS AND DIP HOLD DOWN		
				X'±2"		scale N.T.S.			
				dr	KENNY TAI	2015-11-26	dwg no		
				enr	KENNY TAI	2015-11-26	sheet 1 of 1 size		
				chr	KENNY TAI	2015-11-26	10137925		
				appd	PM ZHENG	2015-11-30	A4		
sheet index				revision	B		type Product Customer Drawing		
				sheet	1				