





19.05 [.750] MINIMUM EXPANDED
9.53 [.375] MAXIMUM RECOVERED

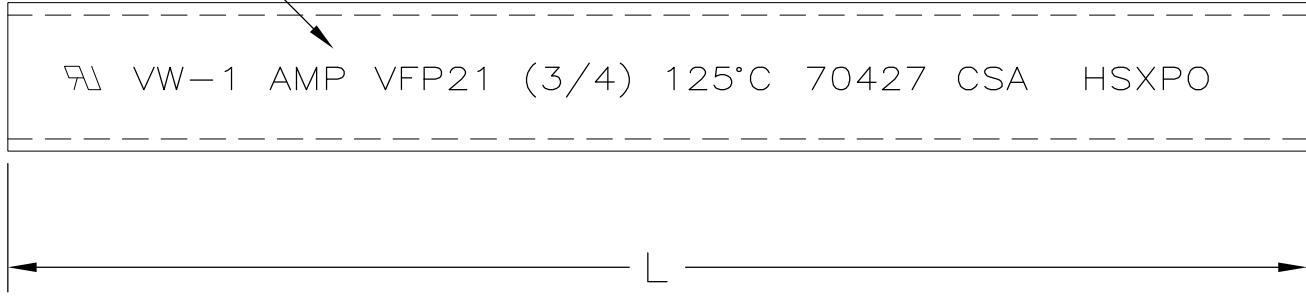

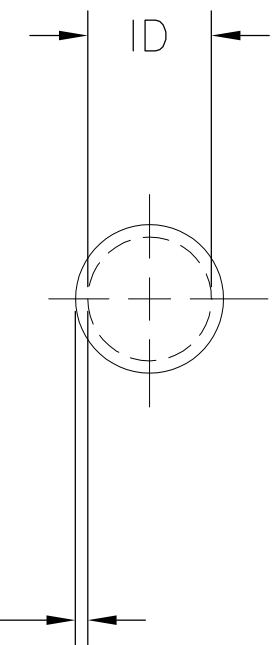

0.76 [.030] NOMINAL WALL
THICKNESS FULLY RECOVERED




REVISIONS		
LTR	DESCRIPTION	DATE
R	REVISED PER DCR NO R060228	10/13/2006
R1	REVISED PER ECO-09-021510	12SEP09

 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED

 TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.











 TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.

 TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF AMS-DTL-23053/5-109-0




5. WEIGHT PER LINEAR FOOT/304.8 mm:
8.89 g/.0196 lbs.

6. MATERIAL: BLACK POLYOLEFIN

 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

MARKING	NOTES	LENGTH L	PART NUMBER
	 	111.25 ± 3.05 [4.38 ± .12] 61 m [200 ft] MINIMUM	 2-603329-3 1-603329-3
		50.8 ± 1.27 [2.00 ± .05] 1219.2 ± 12.7 [48.00 ± .50] 38.1 ± 1.14 [1.50 ± .05]	 1-603329-2 1-603329-1 603329-6
	 	61 m [200 ft] MINIMUM 1219.2 ± 12.7 [48.00 ± .50]	603329-2 603329-1

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.	DRAWN UNGUYEN	DATE 10/13/2006	 Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA. USA 94025 
	RPN	CAD NAME R060228	
DECIMALS .XX ± .01 [.0004 in] .X ± .1 [.004 in] ANGLES .X ± 0.5 DEG	THIRD ANGLE PROJECTION		SIZE B CODE IDENT. NO. 06090 DWG. NO. C-603329
DO NOT SCALE THIS DRAWING			SHEET 1 OF 1