



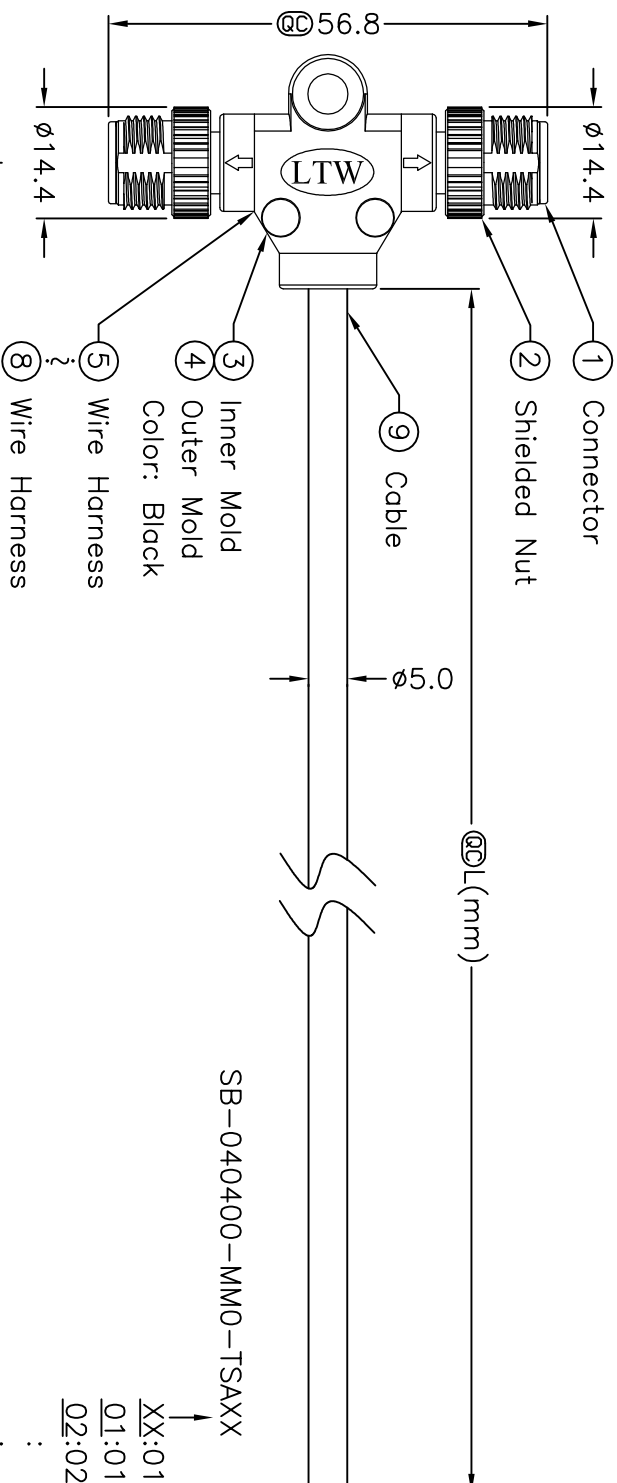


5		6		7		8	
REV.	ECON. NO.	DATE	SIGN.	DESCRIPTION			



4	Black	4
3	Blue	3
2	White	2
1	Brown	1
Conn.1	Wire Color	Conn.2



Note:


- * **QC** Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Polyurethane
- * Shielded Nut: Zinc Alloy, Nickel Plated
- * Male Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 4Pcs
- * Cable: UL2464 22AWG*4C+Talc

Black, PVC Jacket UV Resistant OD=5.0mm


Cable Length Tolerance: 1M~10M±5%mm,
11M~99±500mm.

Cable Length(L):01~99Meters

99:99Meters



ALTW
CONFIDENTIAL
2007.12.03
R&D DEPT.



Conn.1&2

Pin Assignments

Front View

TITLE					
M12B Conn					
T Cable Screw MM Conn MM Pin					
SCALE		Free	SHEET	1	OF 1
REV.	A	SIZE	A4	(QC) :inspection item	
Amphenol LTW					
安費諾亮泰企業股份有限公司					
ITEM NO			DRAWN BY		
DWG NO SB-040400-MM0-TSAXX			Kenneth James		
CUSTOMER AL TW			CHECKED BY Ricky Valerio		
			APPROVED BY Cloud		
			DATE		
			2007/12/03		
			DATE		
			2007/12/04		
			DATE		
			2008/01/04		