



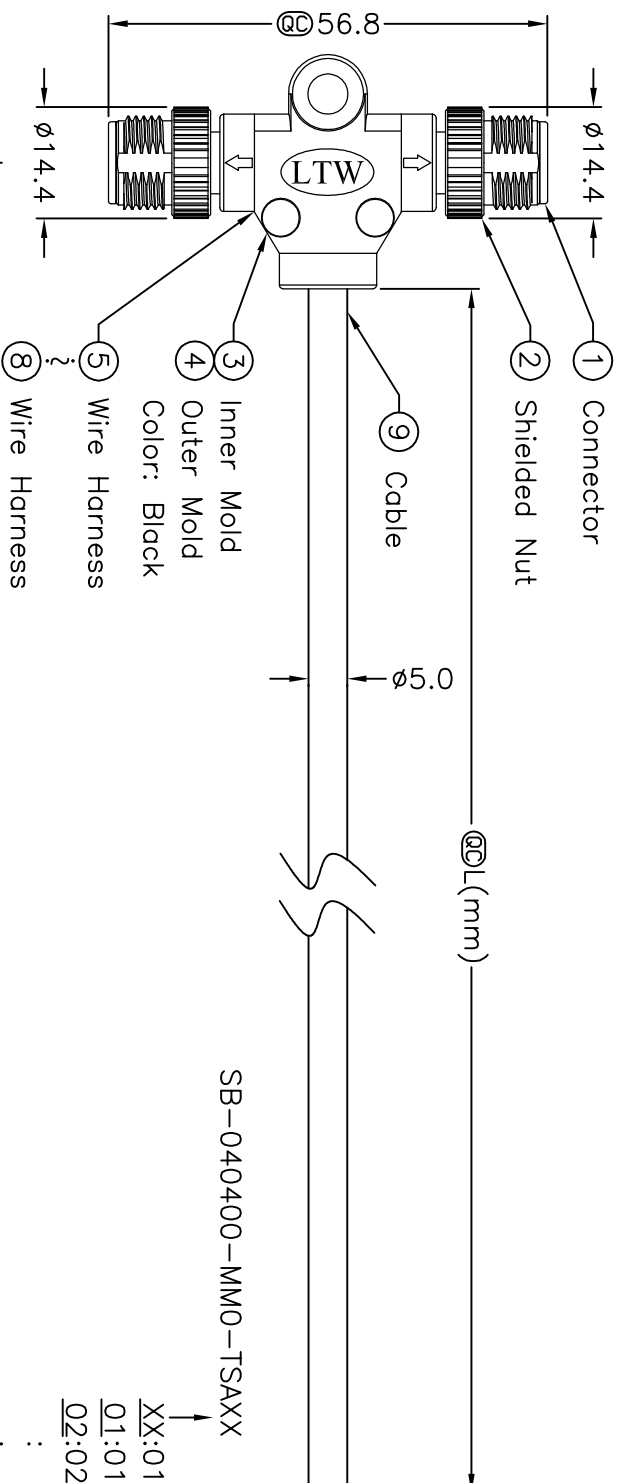


5		6		7		8	
REV.	ECON. NO.	DATE	SIGN	DESCRIPTION			

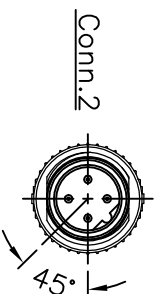

4	Black	4
3	Blue	3
2	White	2
1	Brown	1
Conn.1	Wire Color	Conn.2




Note:

- * **QC** Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Polyurethane
- * Shielded Nut: Zinc Alloy, Nickel Plated
- * Male Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 4Pcs
- * Cable: UL2464 22AWG*4C+Talc
- * Black, PVC Jacket UV Resistant OD=5.0mm
- * Cable Length Tolerance: 1M~10M±5%mm,
- * 11M~99±500mm.

Cable Length(L):01~99Meters

99:99Meters

ALTY
CONFIDENTIAL
2007.12.03
R&D DEPT.



Conn.1&2
Pin Assignments
Front View

TITLE		M12B Conn		DATE	
T Cable Screw MM Conn MM Pin				2007/12/03	
SCALE		Free	SHEET 1 OF 1	CHECKED BY Ricky Valerio	
REV. A		SIZE A4	QC Inspection Item	DATE 2007/12/04	
Amphenol LTW				DRAWN BY Kenneth James	
安費諾亮泰企業股份有限公司				DATE 2008/01/04	
ITEM NO		DWG NO		APPROVED BY Cloud	
CUSTOMER		SB-040400-MM0-TSAXX		DATE 2008/01/04	
ALTW					