



NOTES:

1. SOLDER CUP PIN CONTACTS ARE INSTALLED (SHOWN).
2. ALL DIMENSIONS ARE FOR REFERENCE.


ASS'Y P/N	EPOXY
W7882-9PG-300	NO
W7882-9PG-3ES	YES

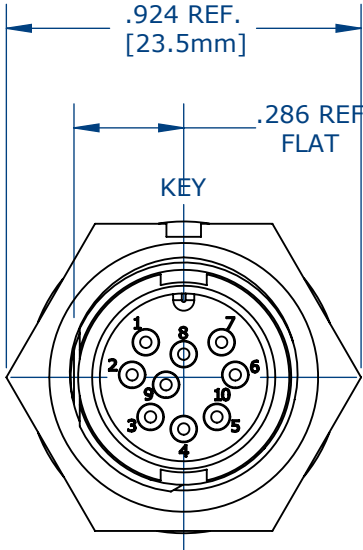



FACE VIEW
W7882-9PG-300 SHOWN

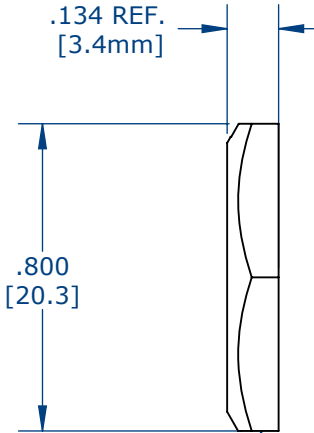


HEX NUT
.924IN ACROSS EDGE

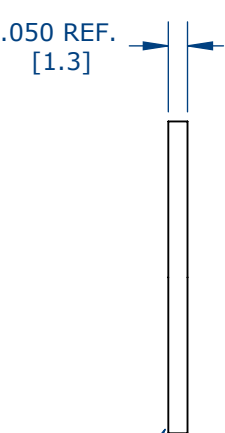


RUBBER GASKET

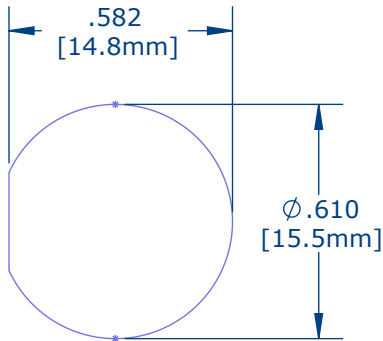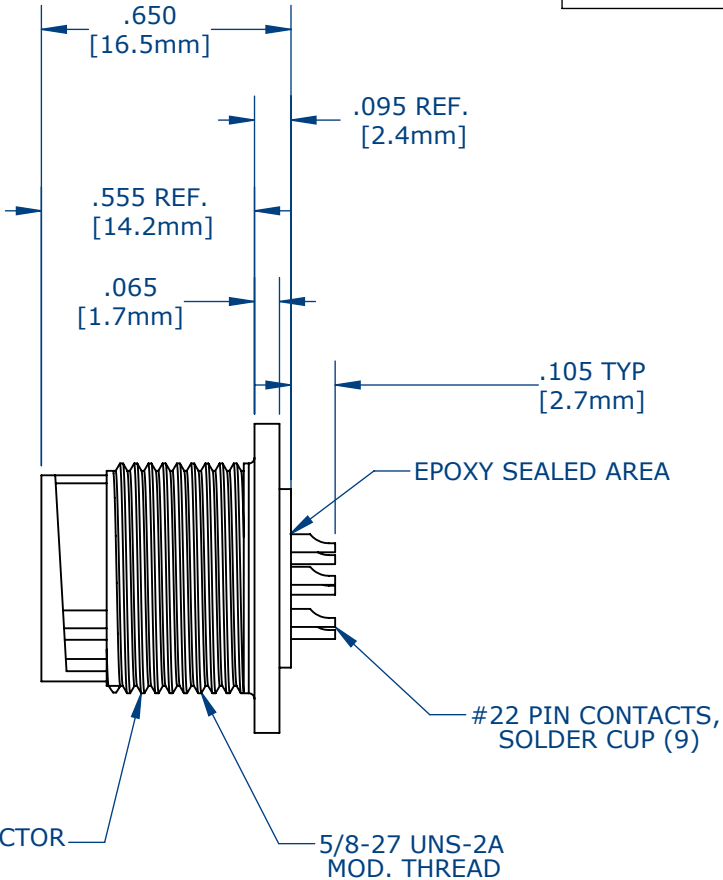

RECOMMENDED
PANEL CUT-OUT
TOLERANCE: ±.003

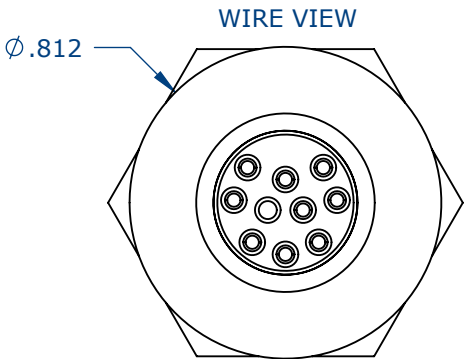

WIRE VIEW

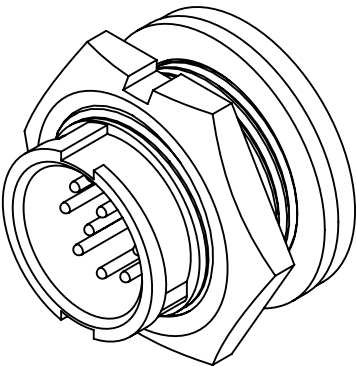

ASSEMBLED VIEW
FOR CUSTOMER REFERENCE

CUSTOMER DRAWING

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

0A	AM	08/10/16	FIRST DRAWN		
REV.	INIT.	DATE	DESCRIPTION		
	AM	08/10/16	ORIG. DRAWN BY:	DATE:	 601 E. WILDWOOD VILLA PARK, IL 60181
			CHECKED BY:		
			APPROVED BY:		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			SCALE	SIZE	SHEET
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			NTS	B	1 OF 1
UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 ANGLES ±1° FRACTIONS ±1/16			FILE:	DIRECTORY:	PART NUMBER:
△ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				SLW	W7882-9PG-3XX
TITLE: PANEL CONNECTOR ASSEMBLY (9) #22 PIN CONTACT SOLDER MINI-CON-X STANDARD PRODUCT					REV 0A