


1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS

2 AVAILABLE IN 2 DIFFERENT SERIES


3 FOR FURTHER INFORMATION SEE DATA SHEET FOR
3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

Technical drawing of a rectangular plate. The drawing shows a side view of the plate with a central horizontal slot. The slot is defined by two parallel lines, with the upper line being slightly curved. The plate has a uniform thickness. Dimension A is indicated by a vertical double-headed arrow on the left side, representing the height of the plate. Dimension B is indicated by a horizontal double-headed arrow at the top, representing the width of the plate.

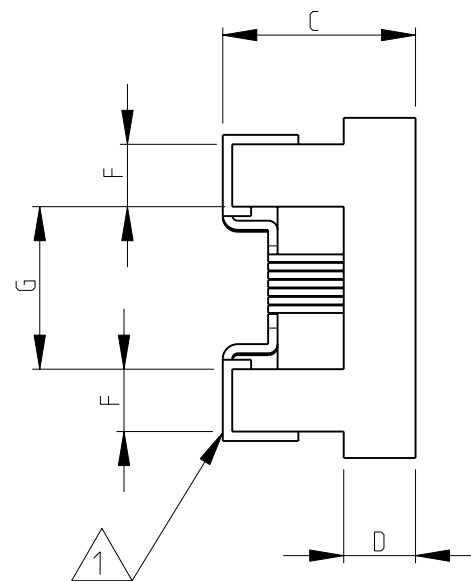

RoHS Compliant

A diagram of a rectangular cross-section of a beam. The width is labeled H and the height is labeled K . The rectangle is filled with a cross-hatched pattern.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M	14-NOV-08	 TE Connectivity				
		CHK PRAKASH.S	14-NOV-08					
DIMENSIONS: mm		APVD STEPHEN.P	14-NOV-08	NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650				
		PRODUCT SPEC						
		-						
		APPLICATION SPEC						
		-						
MATERIAL -		FINISH -		SIZE A3	CAGE CODE 00779	DRAWING NO C- 1624112	RESTRICTED TO -	
CUSTOMER DRAWING						SCALE 20:1	SHEET 1 OF 1	REV BA1