


Ordering Information:

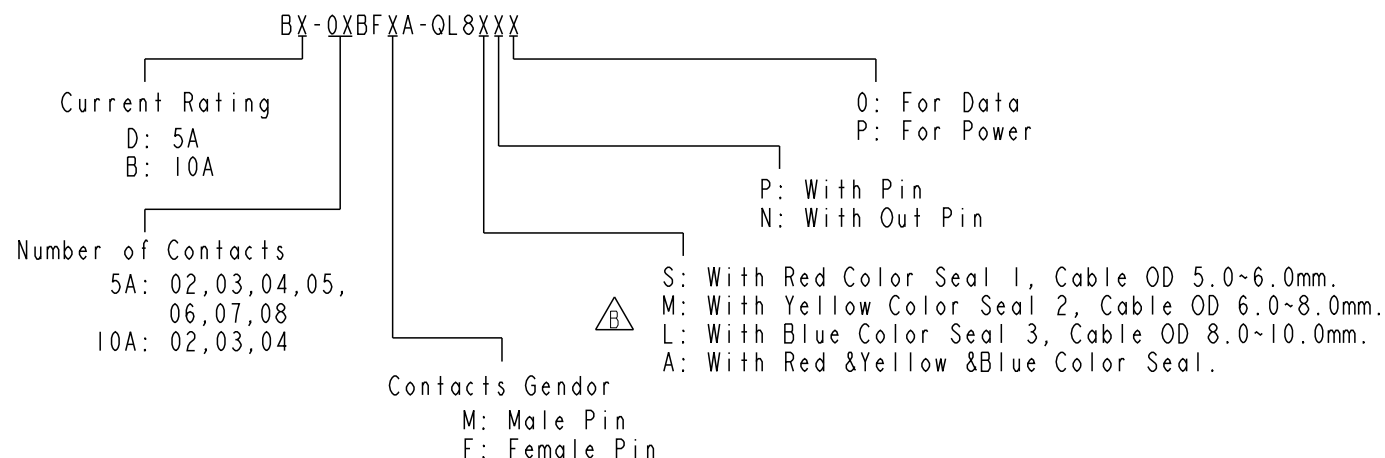

Mating Connector:


Overmolded with Cable: BX-0XAMXM-QL8XXX

Receptacle: BX-0XXMXS-QX8001

Field Installable: BX-0XBMXA-QLXXX

Tool Part No:

ASST-C-XXA-W-X



Pin Assignments Front View	10A ; 300Vac/Vdc 2 Contacts(02)	10A ; 300Vac/Vdc 3 Contacts(03)	10A ; 300Vac/Vdc 4 Contacts(04)	5A ; 300Vac/Vdc 2 Contacts(02)	5A ; 300Vac/Vdc 3 Contacts(03)	5A ; 300Vac/Vdc 4 Contacts(04)	5A ; 300Vac/Vdc 5 Contacts(05)	5A ; 300Vac/Vdc 6 Contacts(06)	5A ; 300Vac/Vdc 7 Contacts(07)	5A ; 300Vac/Vdc 8 Contacts(08)
Male Pin										
Female Pin										

UNIT:mm		TITLE X-Lok B-Size Field Installable Cable Type F Conn				ITEM NO		DRAWN BY	DATE
TOLERANCE ±0.5 mm		SCALE 8:5	SIZE A4	SHEET 2	OF 2	DWG NO BX-0XBFXA-QL8XXX		CHECKED BY Brady	DATE 2019/07/26
REV. B		WC-REV. A.3	QC: Inspection item			CUSTOMER ALTW		APPROVED BY Neo	DATE 2019/07/26

Amphenol LTW
安費諾亮泰企業股份有限公司