

LOC		DIST		REVISIONS			
F	LYR	DESCRIPTION		DATE	DWN	APVD	
A2		REVISED PER ECO-12-003977		05JUN2012	KH	AS	





- 1

HOUSING: LCP, UL94V-O, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- 2

CONTACT: 0.76 μ m GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 μ m MIN TIN-LEAD
ON PCB TAIL,
OVER 1.27 μ m MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST:1.27 μ m MIN NICKEL.
- 4

CONTACT: 0.76 μ m GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 μ m MIN MATTE TIN PER ASTM B 545
ON PCB TAIL,
OVER 1.27 μ m MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST:1.27 μ m MIN NICKEL.
- 6

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

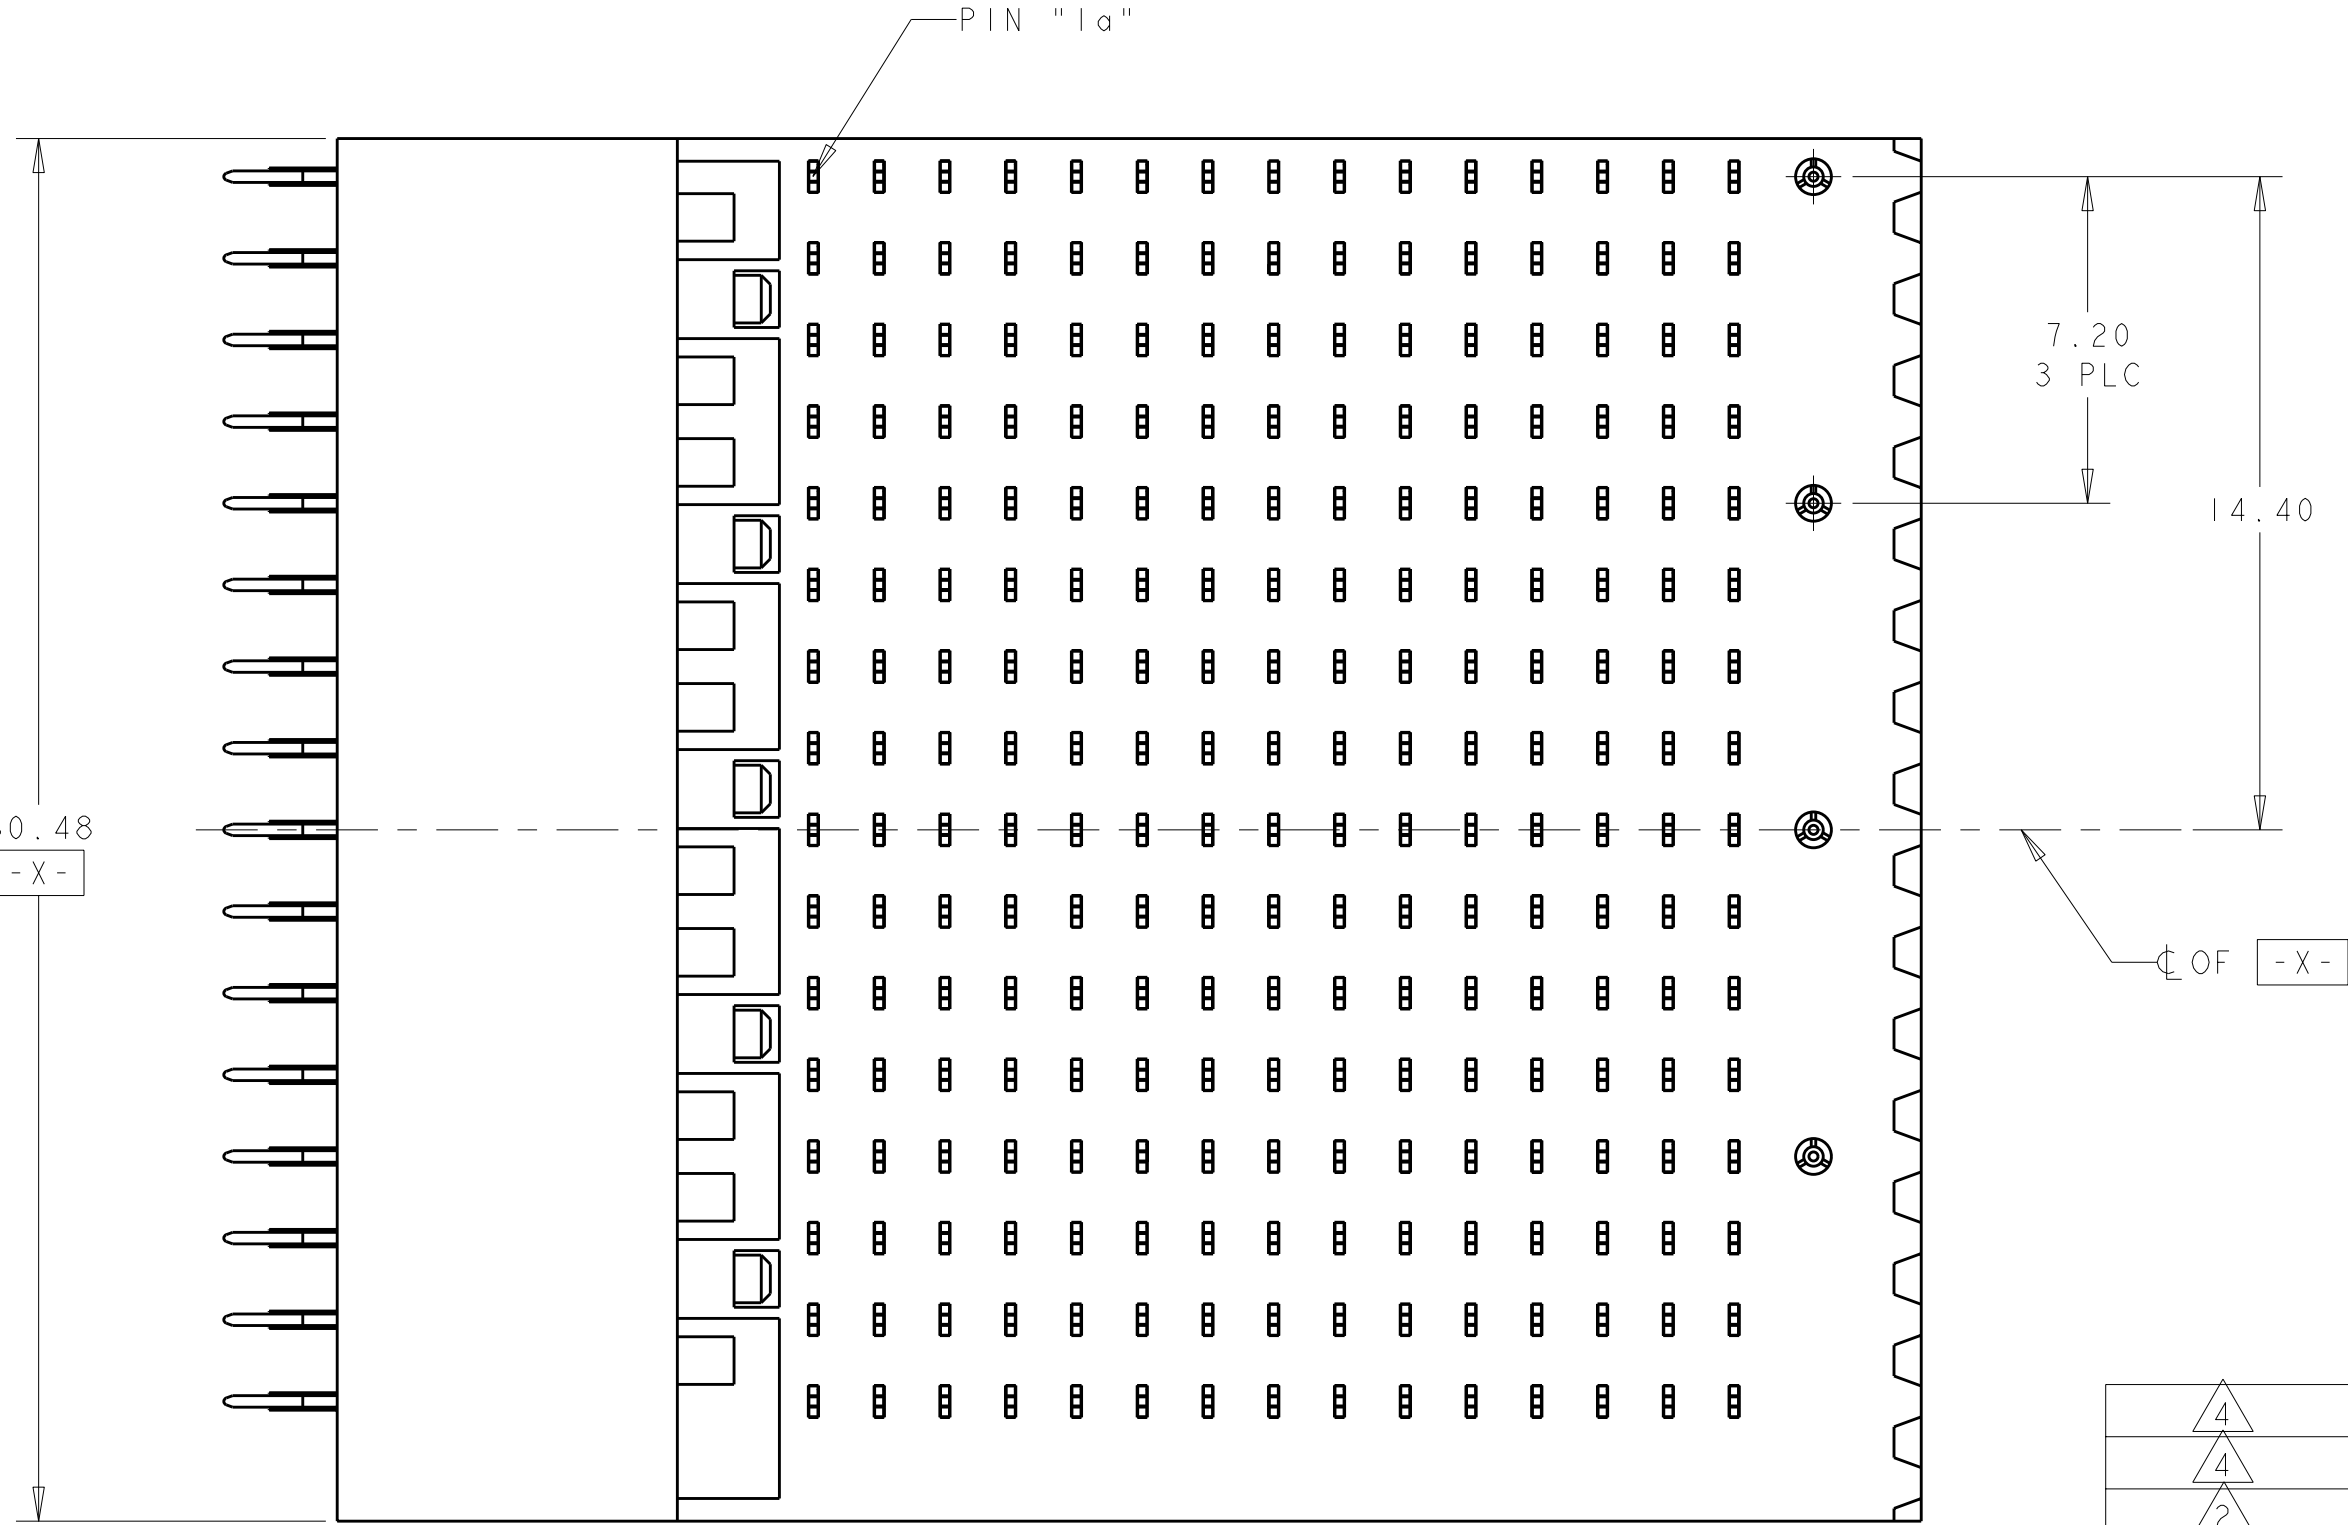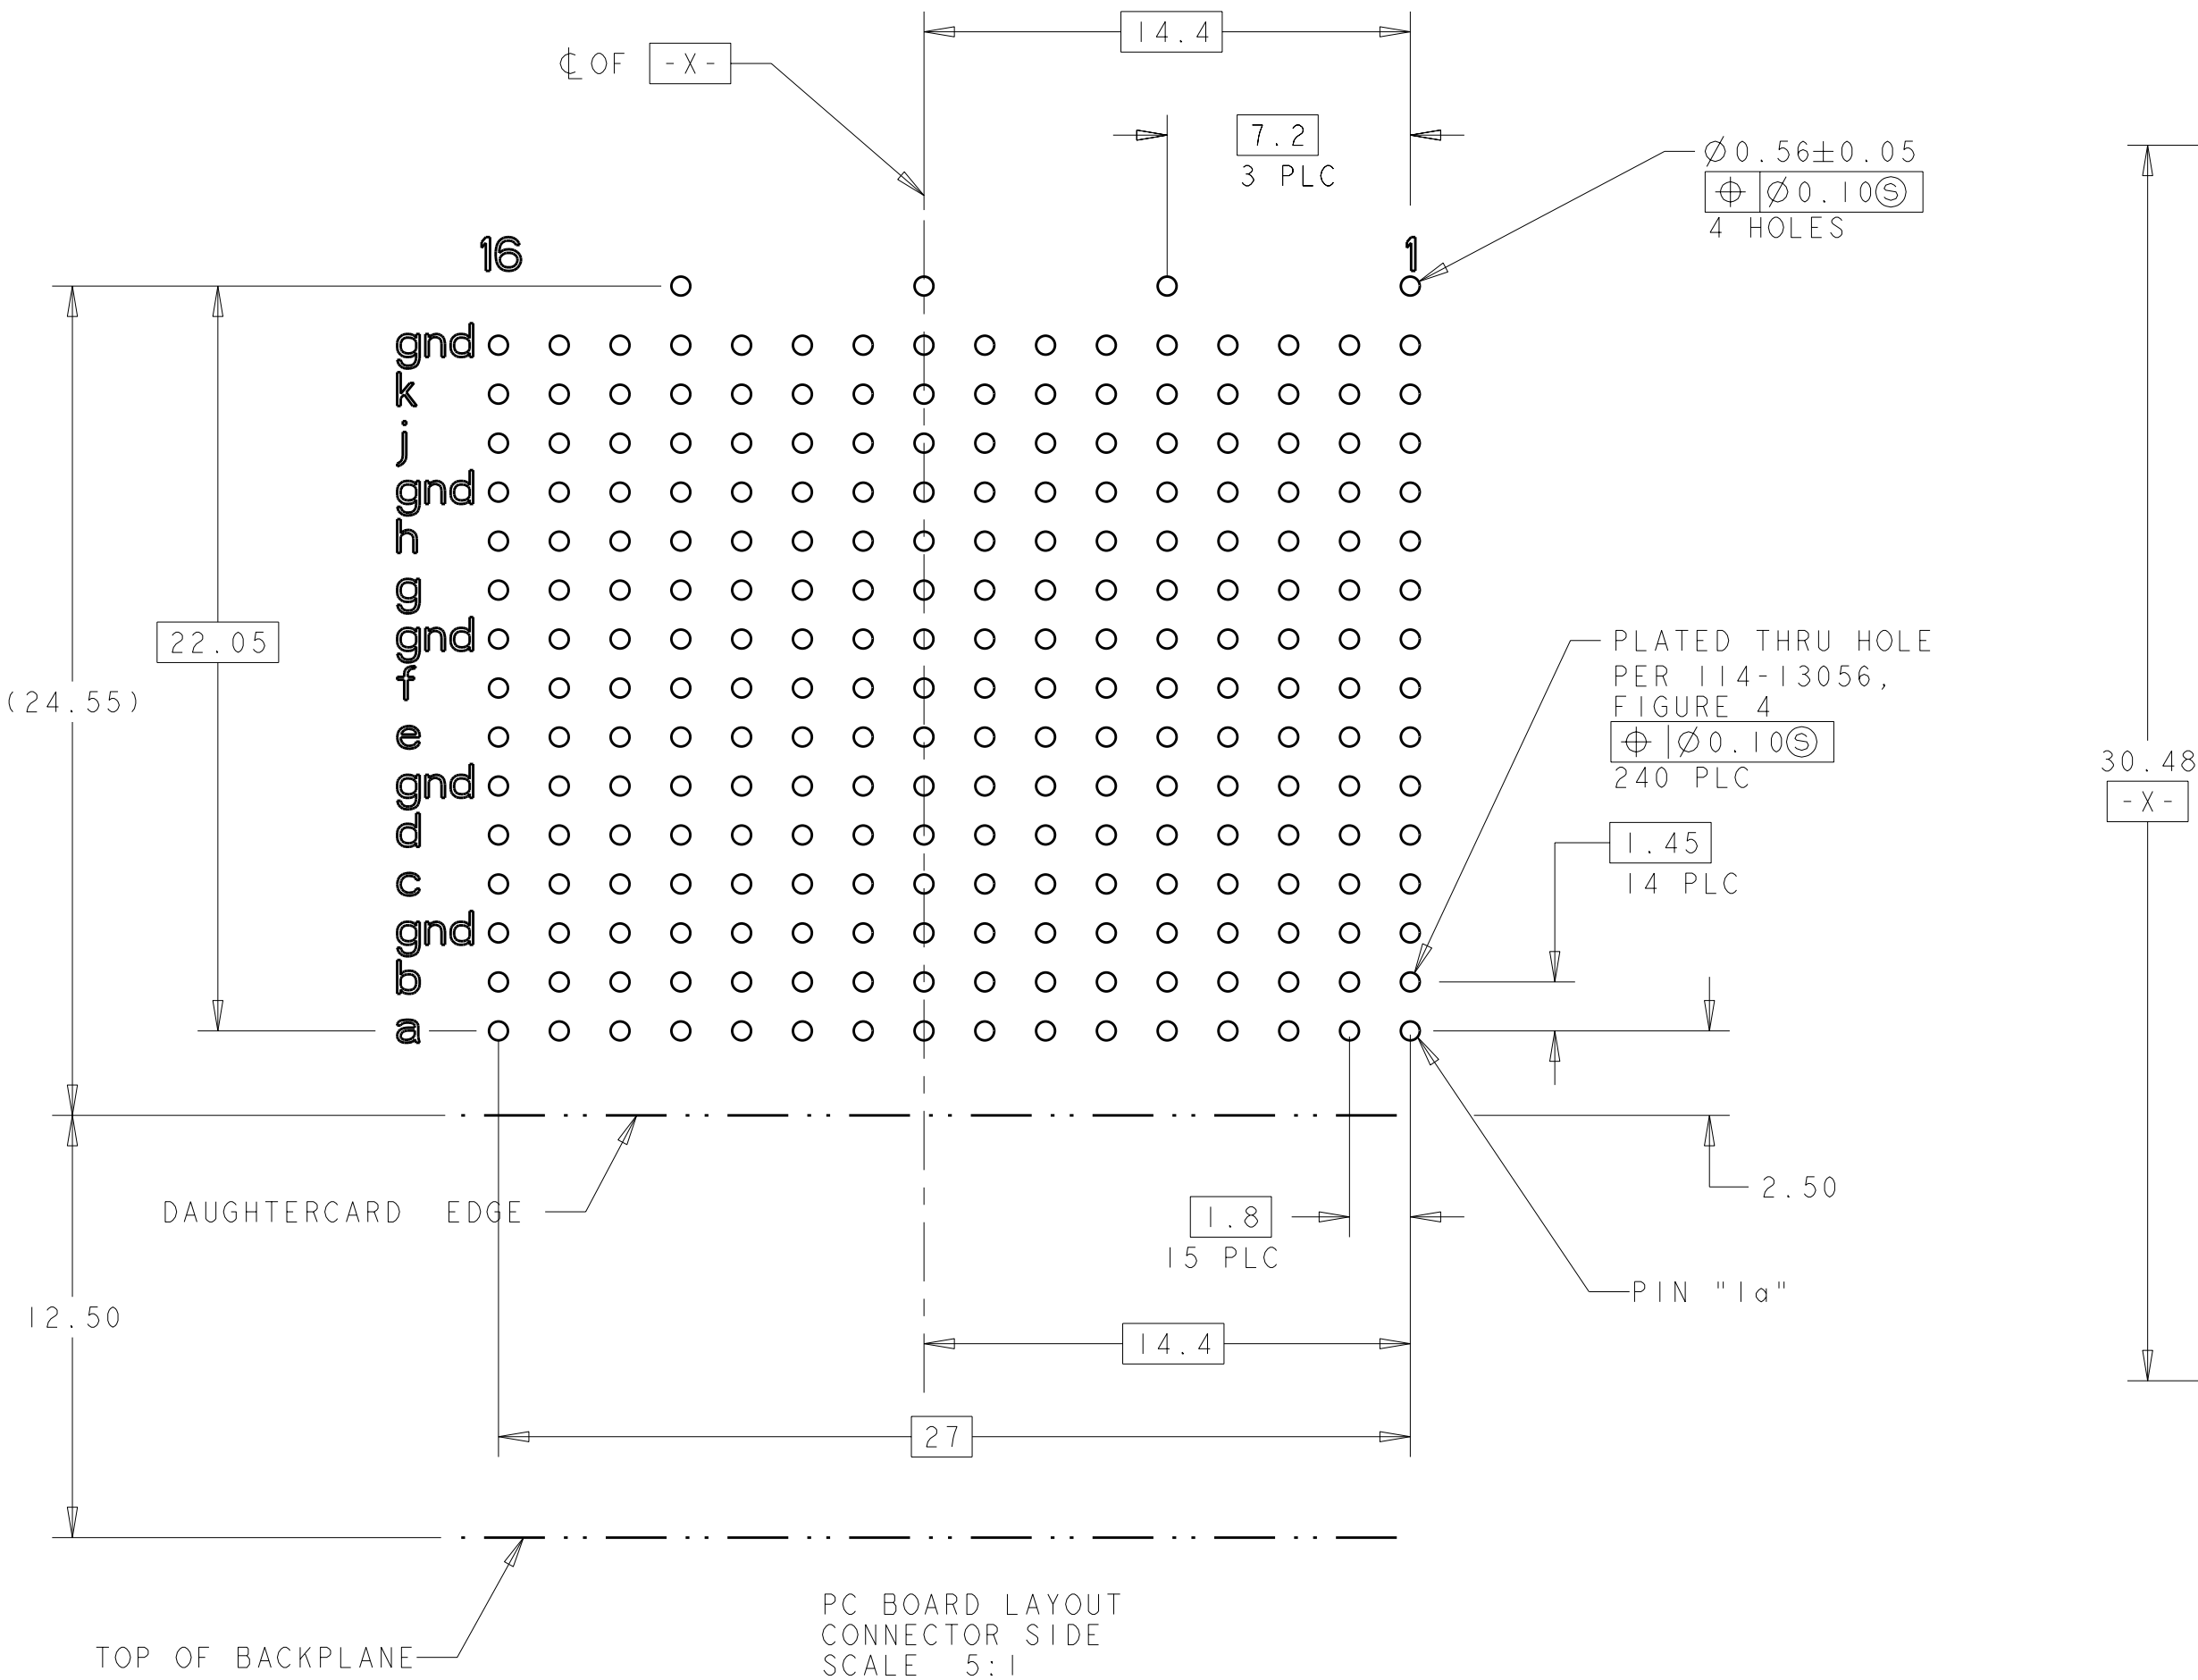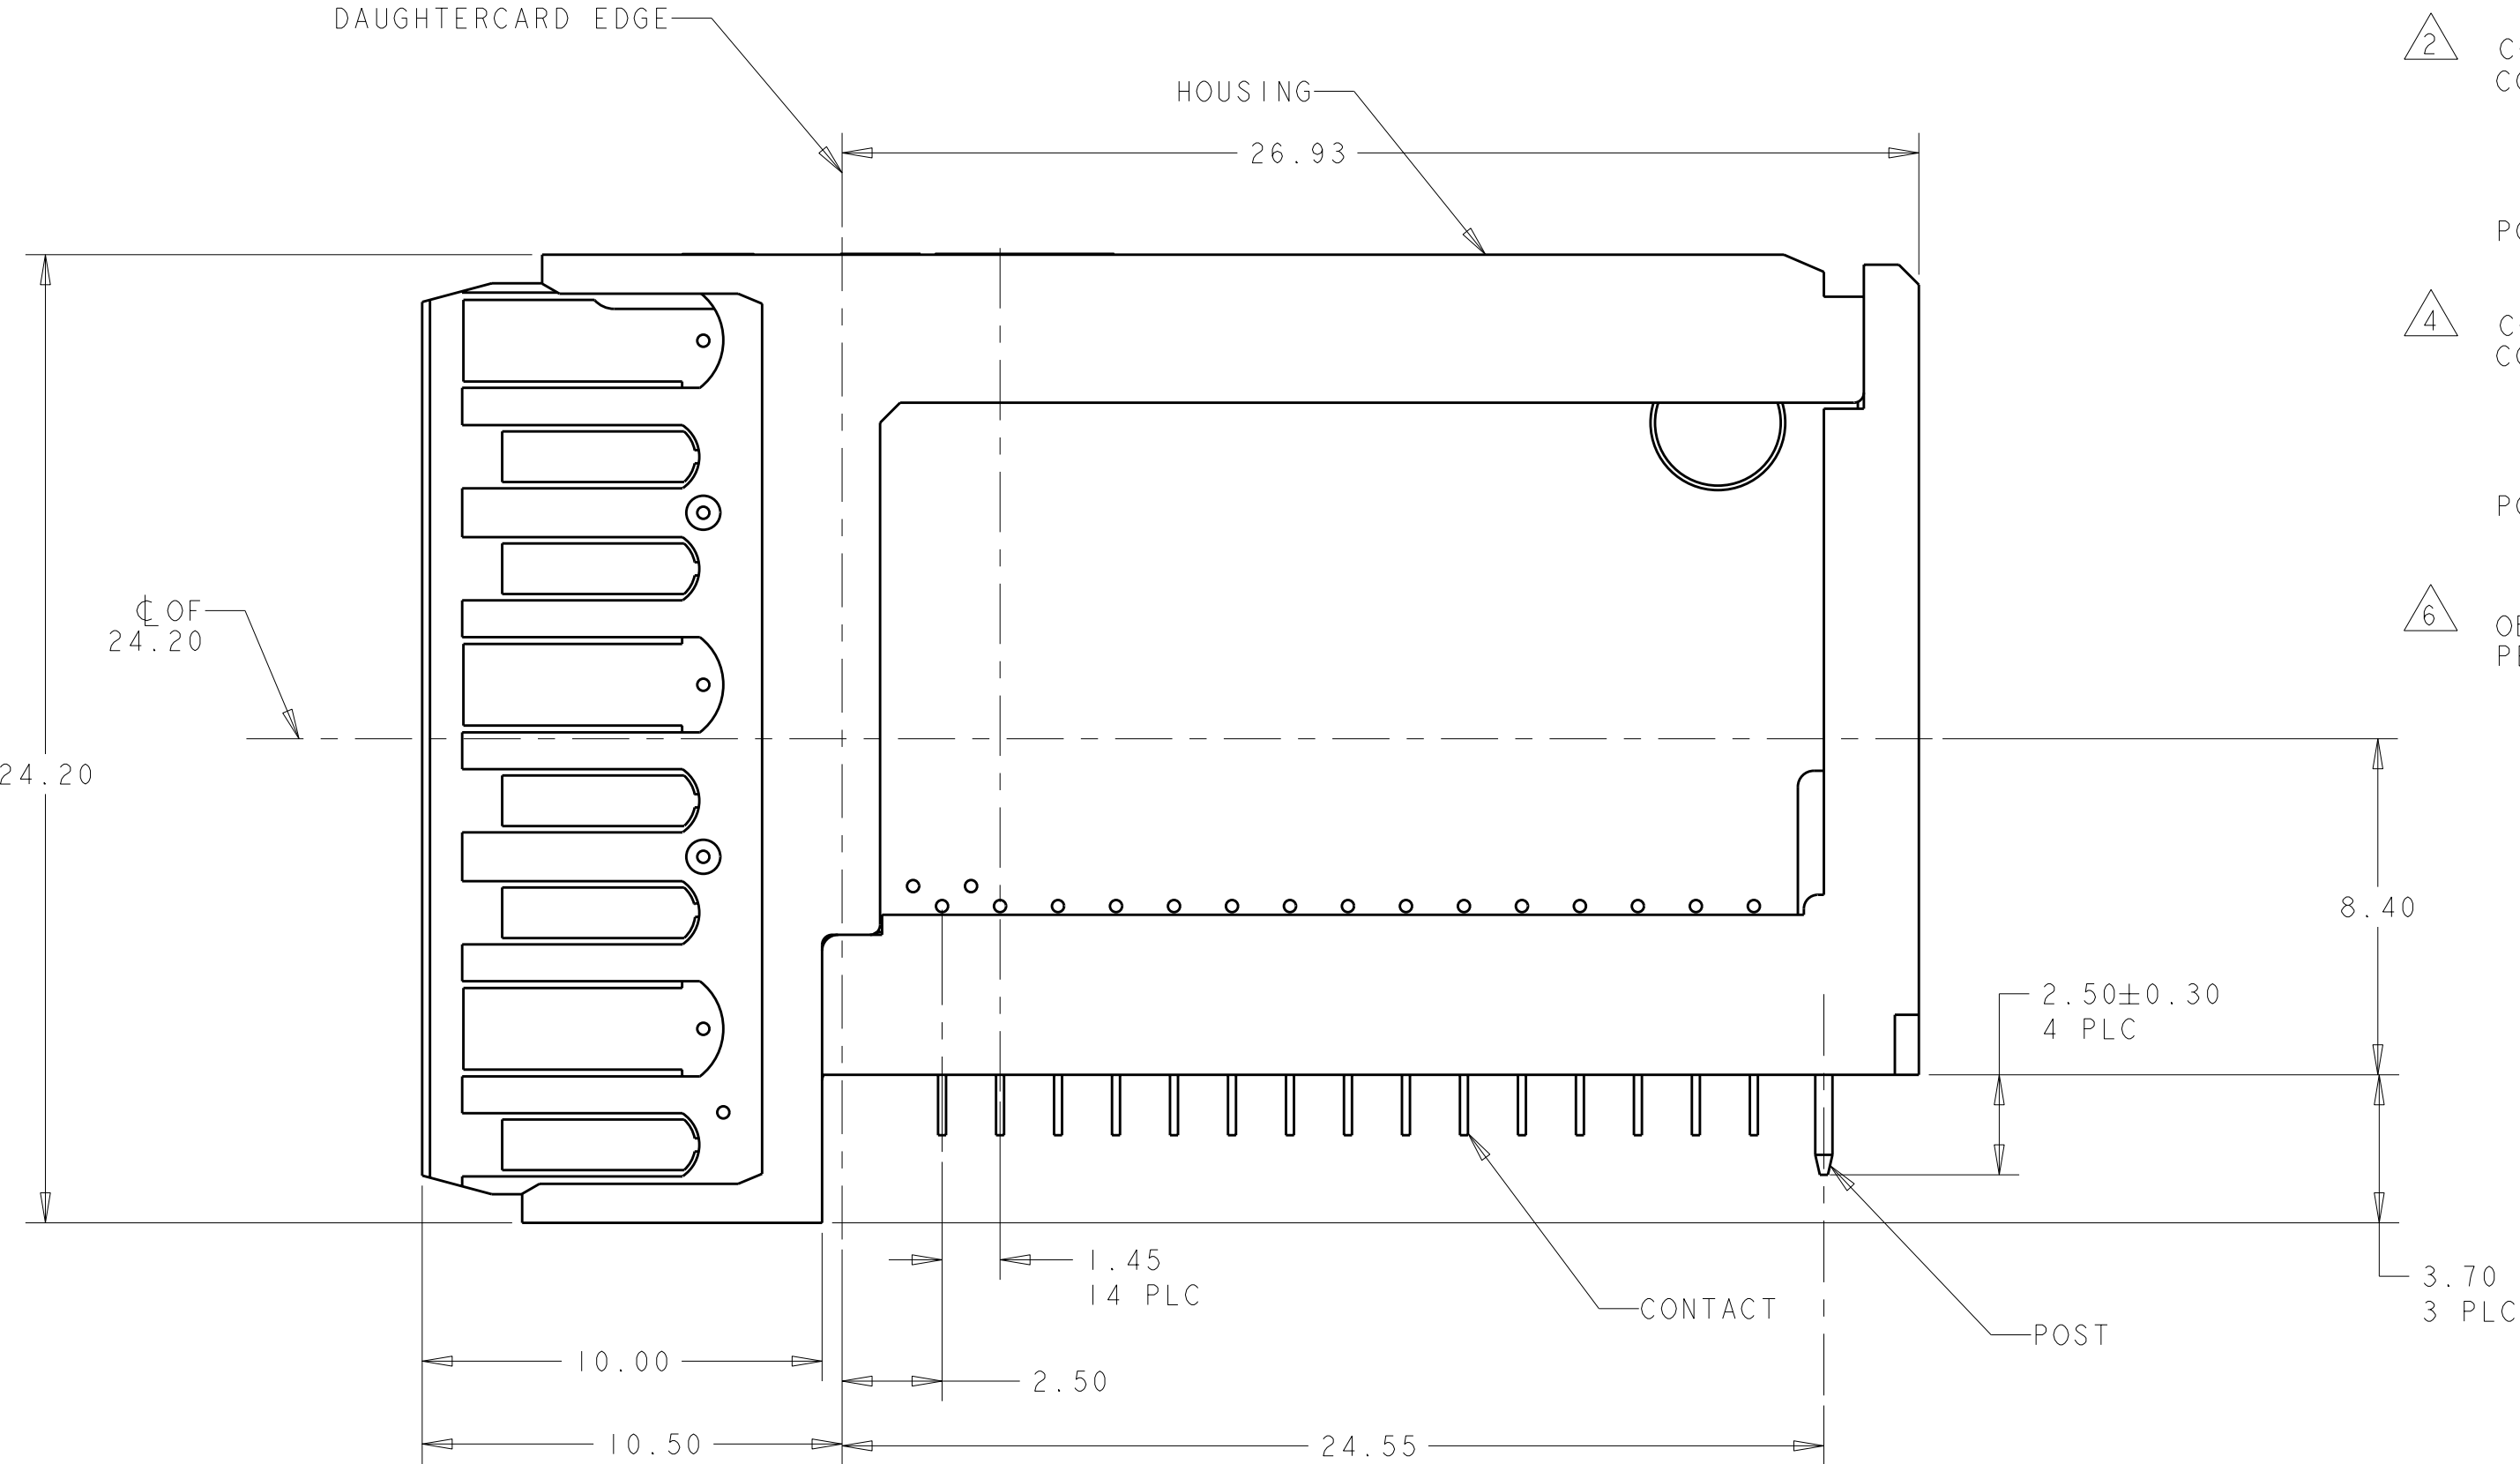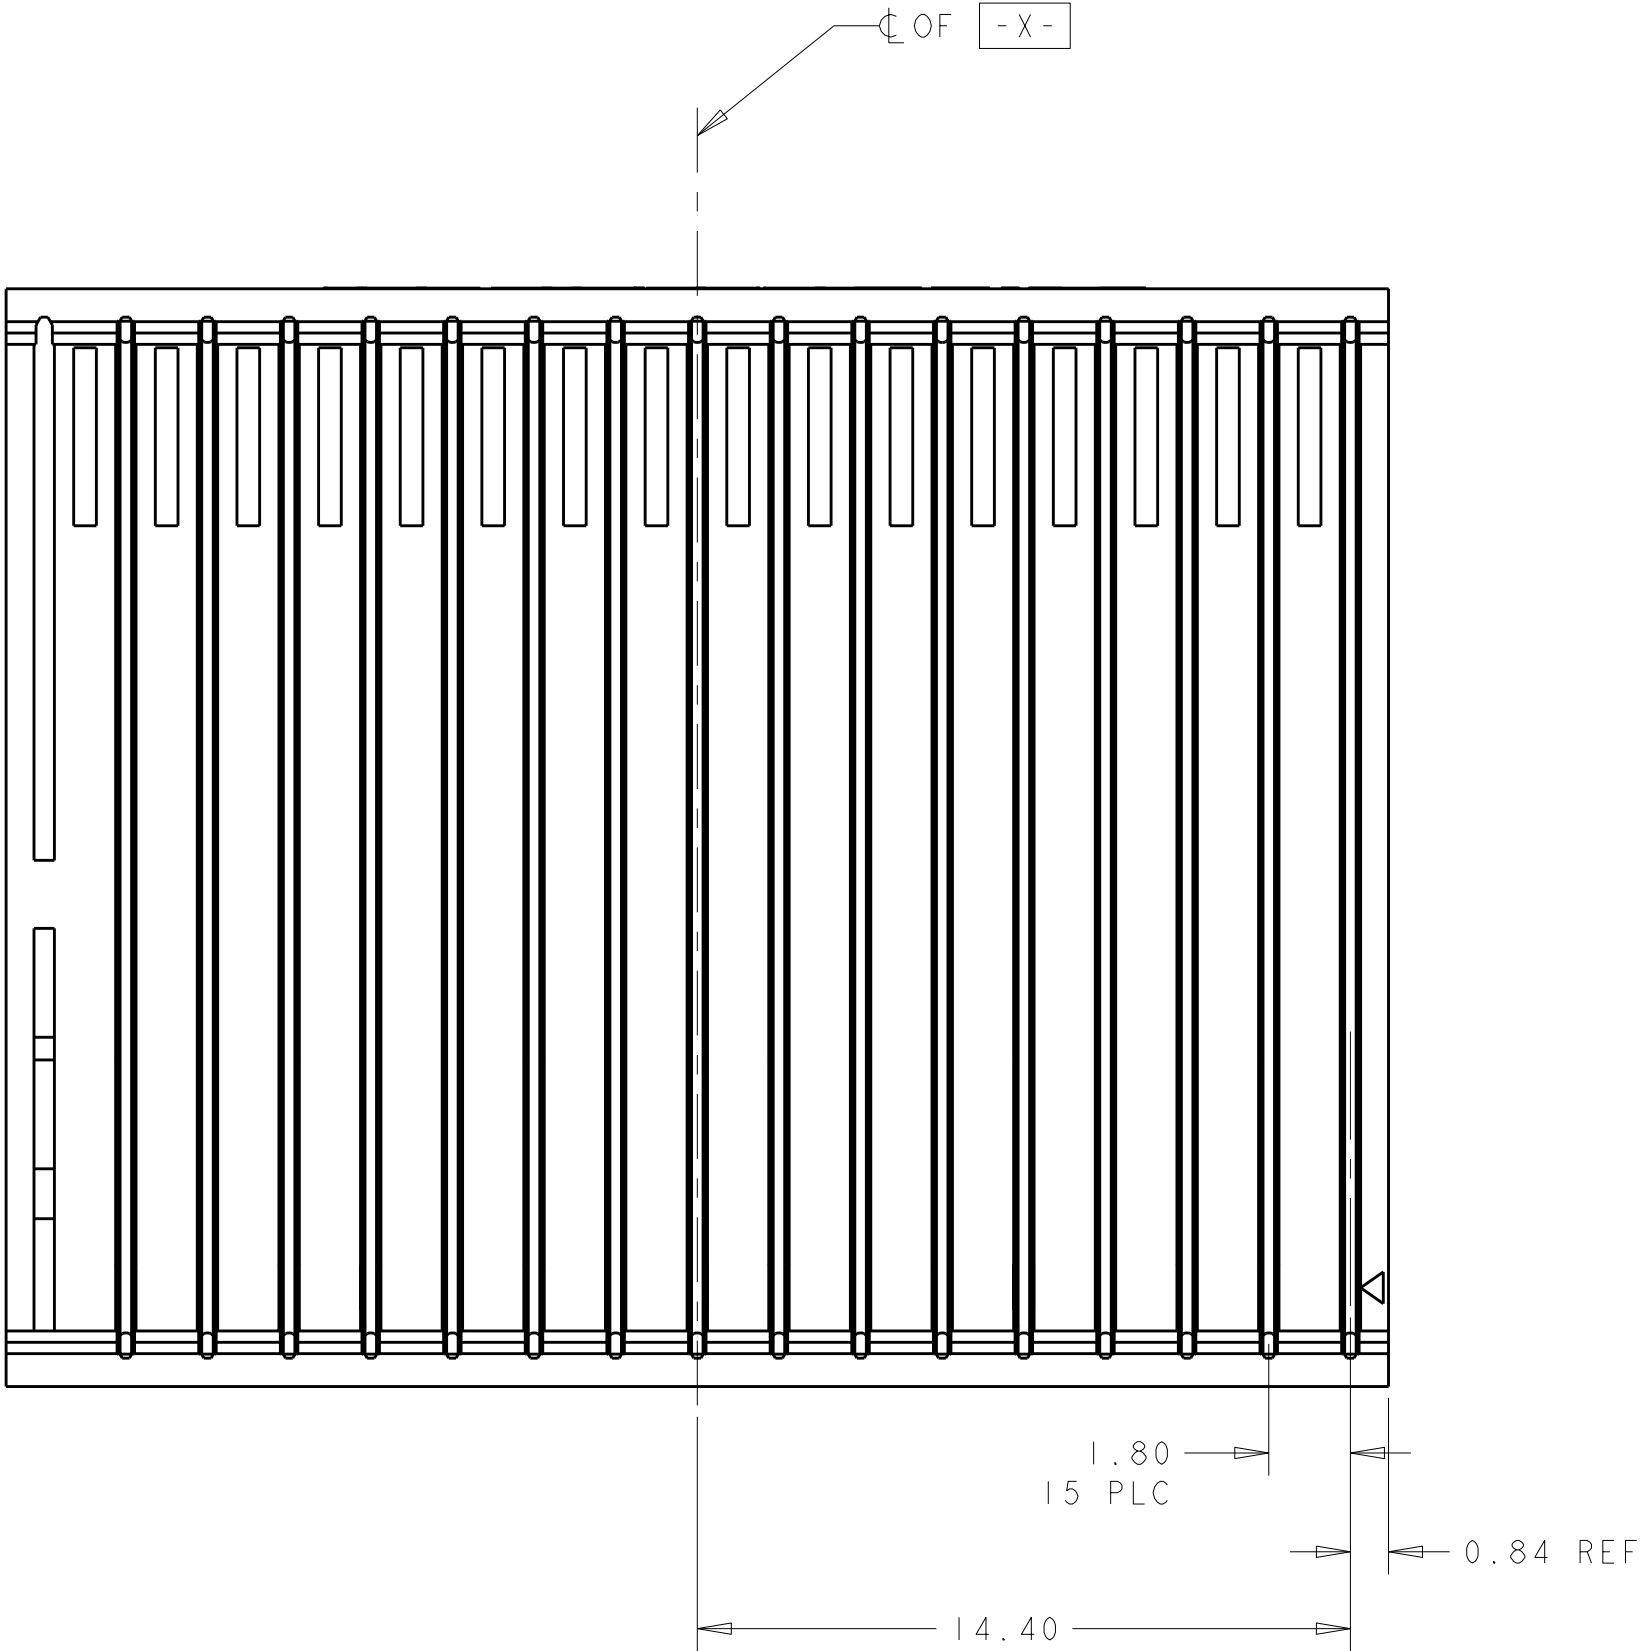

4	DIFFERENTIAL PAIR, NONSEQUENTIAL	6	1410217-4
4	SINGLE END, NONSEQUENTIAL		1410217-3
2	DIFFERENTIAL PAIR, NONSEQUENTIAL	6	1410217-2
2	SINGLE END, NONSEQUENTIAL		1410217-1
FINISH		DESCRIPTION	
		PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03OCT2002	TE Connectivity	
		CHK	03OCT2002		
DIMENSIONS:		APVD	03OCT2002	NAME	
mm		PRODUCT SPEC			
		108-2072		APPLICATION SPEC	
		114-13056			
MATERIAL		WEIGHT	-	SIZE	
		CUSTOMER DRAWING			
		SCALE	8:1	SHEET	
		REV	A2		