

5

4

3

2



1

D

C

B


A

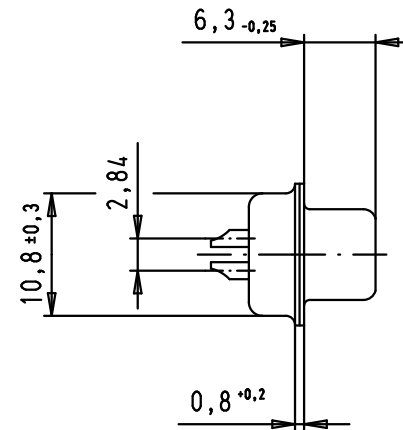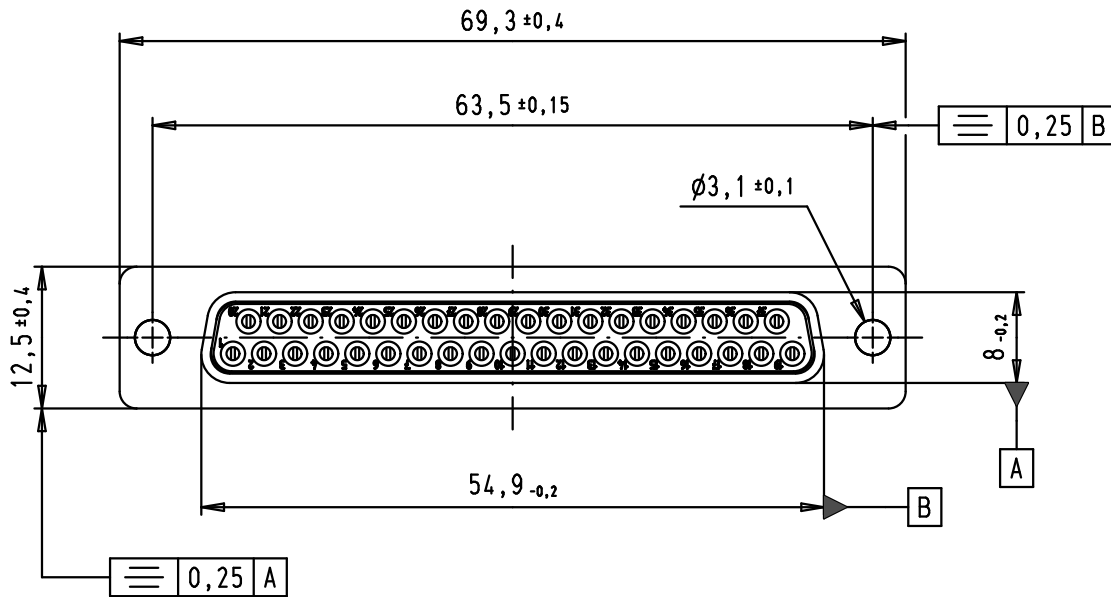


SPECIFICATIONS

Mating cycles	500
Filter type	C
Capacitance	470 pF $\pm$ 20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 G Ω

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1
50	10
100	15
500	35
1000	32

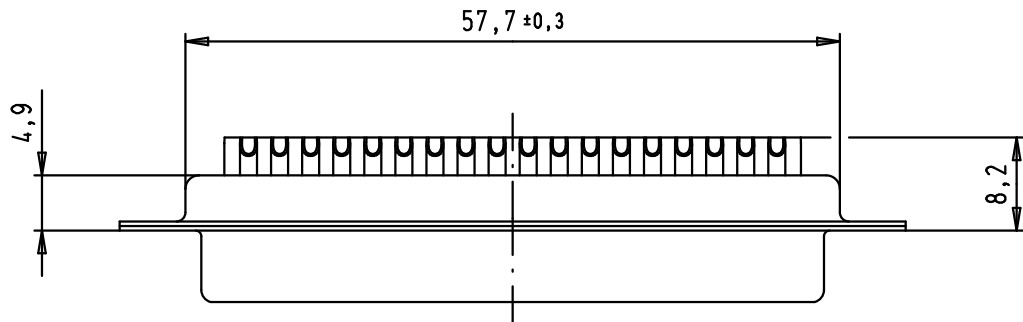

Solder buckets for AWG 20

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 37 poles, turned solder buckets	Maßstab/ Scale 1,5:1
			Detail.	08/07/02	CV			
			Insp.					
			Stand.					
35300	01/12/08	PK				 HARTING EURL F-95972 Paris	TB 09 64 411 7220	Blatt/ Page 1 / 1
33800	18/08/06	PK						
31058	08/07/02	CV						
Mod.	Dat.	Name						