

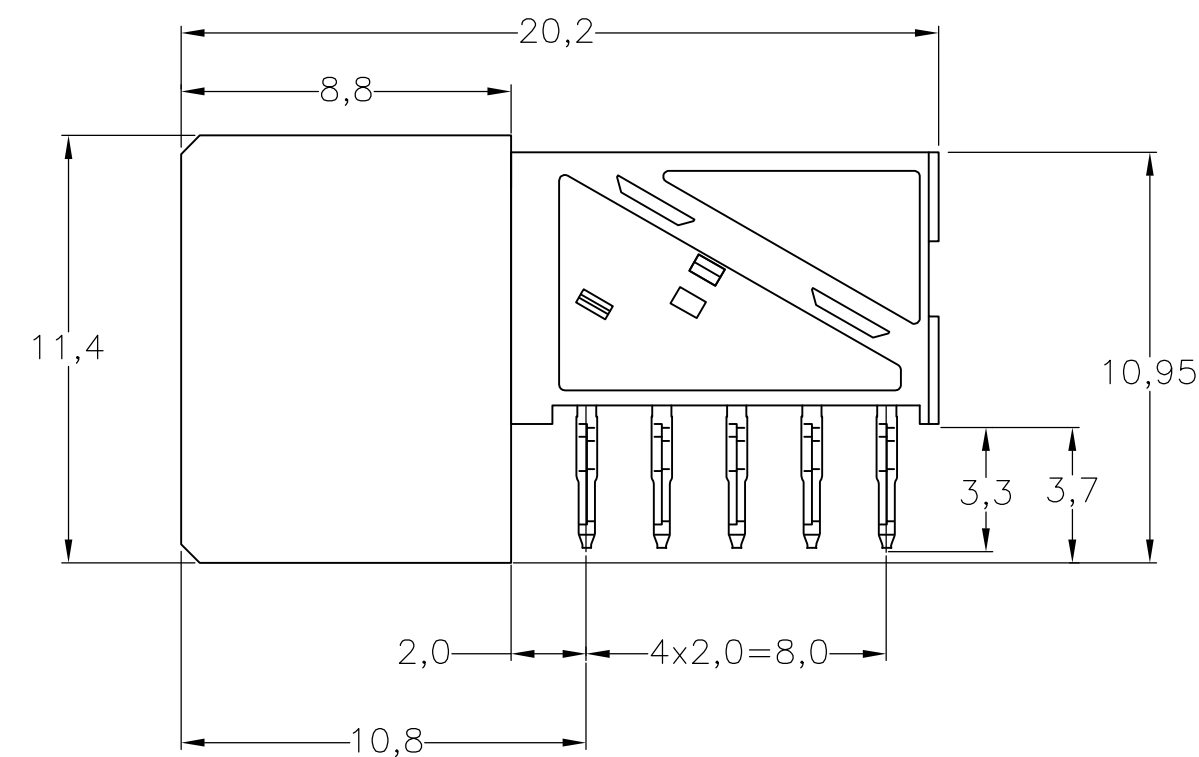


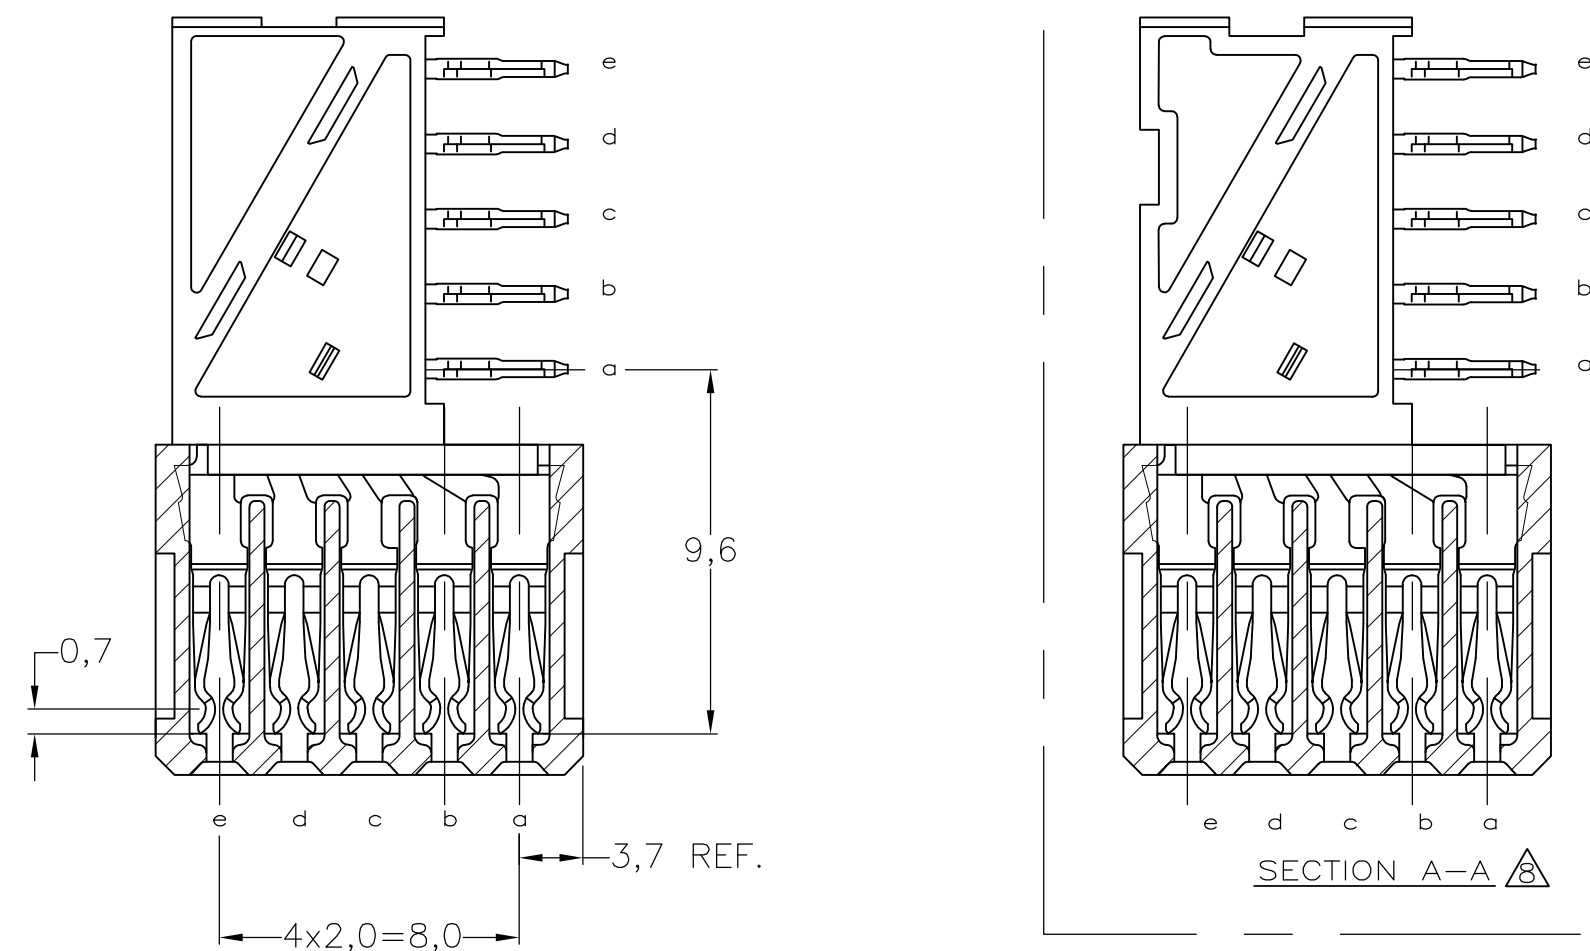

- ① MATERIAL CONTACT; PHOSPHORBRONZE  
MATERIAL HOUSING;  
GLASSFILLED POLYESTER UL-RATING 94V0 (GRAY)
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN.  
AND ACTION PIN: 0,5μm TIN-LEAD MIN.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE  
THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
- ⑥ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 95 HOLES  
7 FITS WITH INTEGRATED GROUND RETURN UPPERSHIELD,  
BASIC P.N. 352028  
AND INTEGRATED GROUND RETURN LOWERSHIELD,  
BASIC P.N. 352029
- ⑧ CONNECTOR ASSEMBLED WITH REDESIGNED CONTACTS.  
CONTACTS HAVE A CORING-OUT IN THE PLASTIC.
- ⑨ 0.76μm MIN GOLD PLATING AT MATING SURFACES.
- ⑩ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER  
D.RENAUD/D.SINISI.

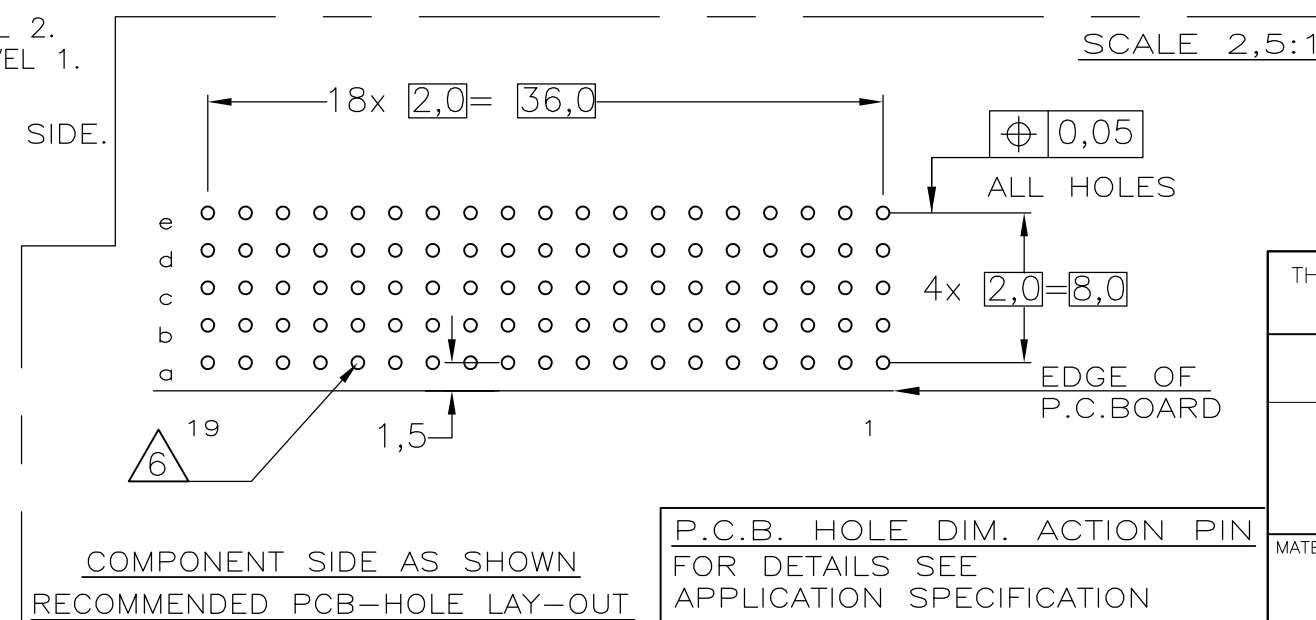

|                                                                                                            |  |                                                                                                                   |  |                                                                                                       |  |
|------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                                     |  | DWN<br>E. MÖHLMANN<br>CHK<br>W.V.D.HEIJDEN<br>20JAN97<br>20JAN97                                                  |  |  TE Connectivity |  |
| DIMENSIONS:<br>mm<br> |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br>0-PLC ±<br>1-PLC ±<br>2-PLC ± ±0.2<br>3-PLC ±<br>4-PLC ±<br>ANGLES ± |  | NAME<br>Z-PACK 2MM HM 95 POS. (19 COLUMNS)<br>FEMALE DAUGHTER CARD CONNECTOR                          |  |
| MATERIAL<br>-                                                                                              |  | FINISH<br>-                                                                                                       |  | SIZE<br>A2                                                                                            |  |
|                                                                                                            |  | WEIGHT<br>-                                                                                                       |  | CAGE CODE<br>00779                                                                                    |  |
|                                                                                                            |  |                                                                                                                   |  | DRAWING NO<br>C-352009                                                                                |  |
|                                                                                                            |  |                                                                                                                   |  | RESTRICTED TO<br>-                                                                                    |  |
| CUSTOMER DRAWING                                                                                           |  |                                                                                                                   |  | SCALE NTS<br>SHEET 1 OF 1<br>REV 1                                                                    |  |