
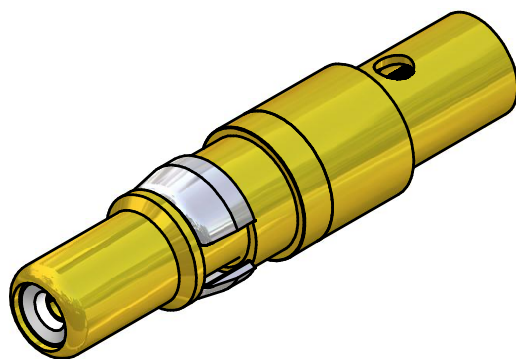
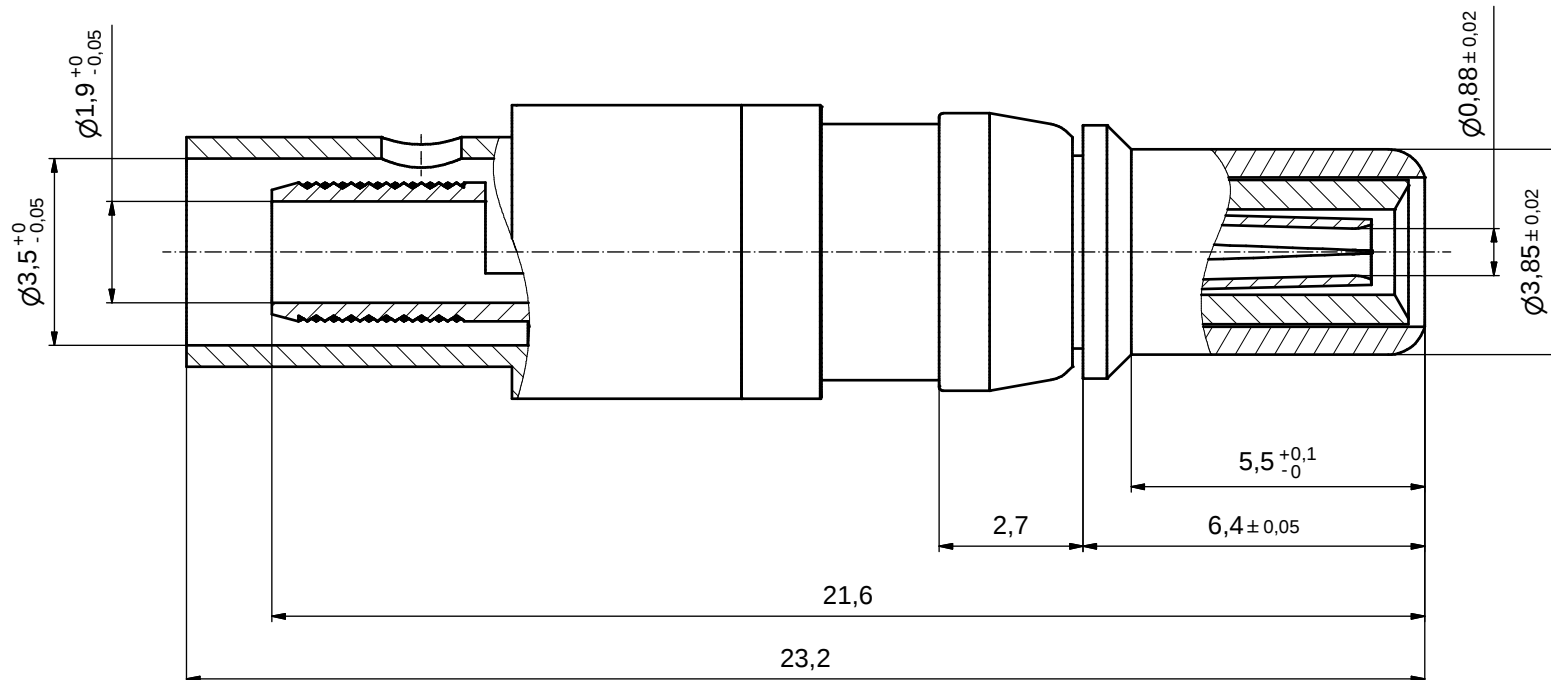





NOTES:

1. PLATING MATING SIDE.

INNER CONDUCTOR: min. 50µin HARD GOLD over min. 50µin NICKEL

OUTER CONDUCTOR: min. 30µin HARD GOLD over min. 50µin NICKEL

2. FOR CABLE S2

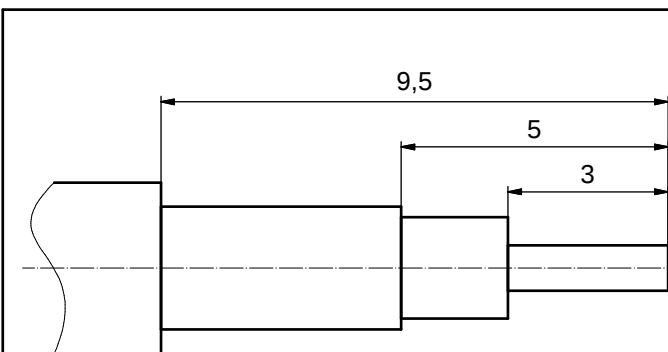

STRIPPING DIMENSIONS

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		 dim. in mm
	date	name
drawn	20.04.2009	Sonnenberg
appd.	20.04.2009	Fischer
norm		
d-old		





scale:		5:1	
material:			
title:			
COAXIAL CONTACT MALE 50 OHM			
Inner conductor for solder termination			
outer conductor for crimp or solder termination			
dwg no:		Inventor 10	DIN-
13K2A030A			A3
			sh: 1
part no:		131J20059X	

Directive 2002/95/EC
„RoHS“
Compliant