
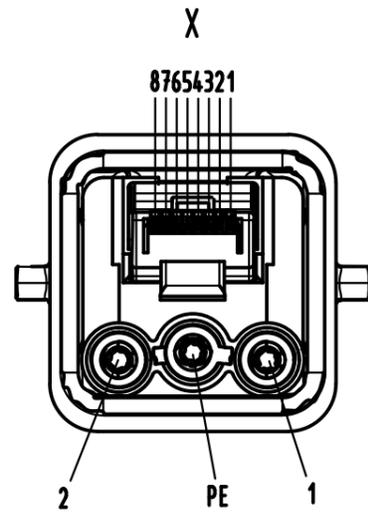


Alle Rechte vorbehalten/ All rights reserved

Mating face RJ45 according to IEC 60603-7

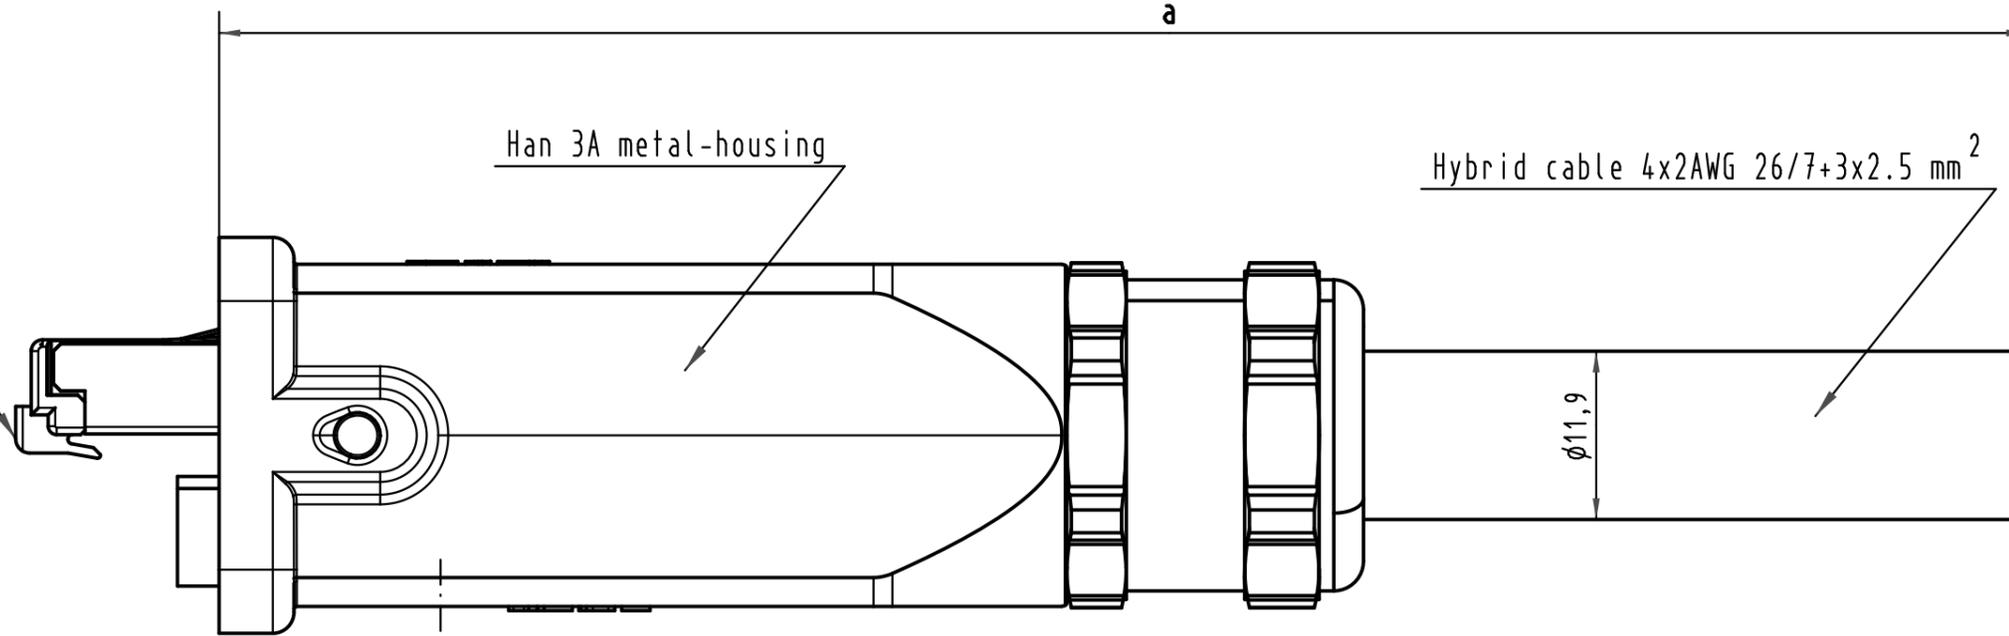

Loading-Plan (Data)

- Shield
- 1 White/green
- 2 Green
- 3 White/orange
- 4 Blue
- 5 White/blue
- 6 Orange
- 7 White/brown
- 8 Brown


Loading-Plan DC version

- 1 black
- 2 blue
- PE green/yellow
- PE

-Protection level: IP67
-Temperature range: -20°C ...+70°C

Data Part
-Transmission properties in accordance with ISO/IEC 11801:2002: Class D.

???????R??

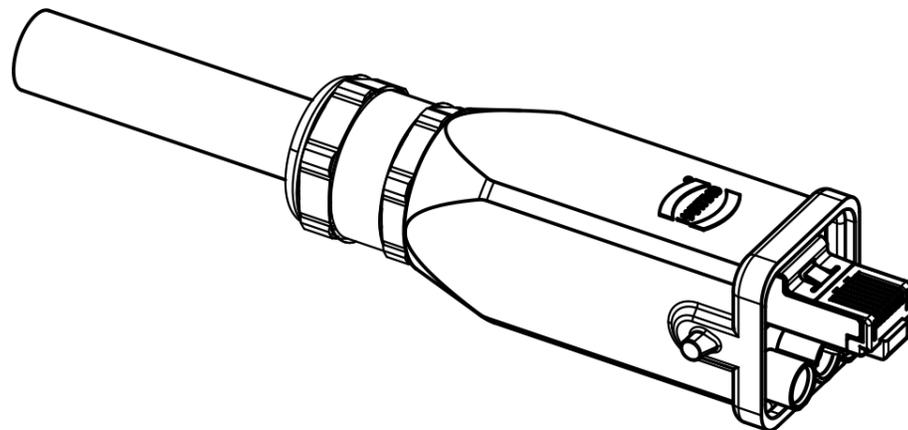

7	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 080 0001	80 m
6	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 060 0002	60 m
5	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 040 0001	40 m
4	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 020 0001	20 m
3	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 010 0001	10 m
2	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 005 0001	5 m
1	Hybrid cable 4x2AWG26/7+3x2,5 mm²	DC	33 57 111 001 0001	1 m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

All Dimensions in mm Original Size DIN A 3			Nicht tol. Maße/ Free size tol. Oberflächete/ Surface qual.			Ref. MB Mat.		
Oberflächenschutz/ Coating			V= cm³ A= mm²			Hybrid cable assembly, 4x2AWG26/7+3x2,5 mm² HAN3A, DC		
Detail.		20.05.08	MS		2:1			
Insp.		20.05.08	RA					
Stand.								
DRS648A	03.12.09	MS	HARTING Electronics GmbH & Co. KG D-32339 Espelkamp			TB 33 57 111 xxx 0001		
35035	10.11.08	MS				Sub.		
34553								
Mod.	Dat.	Name						