


4

3

2


1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-11-005027	11MAR11	RK	HMR
	B	REVISED PER ECO-16-006378	03NOV2016	RS	MZ

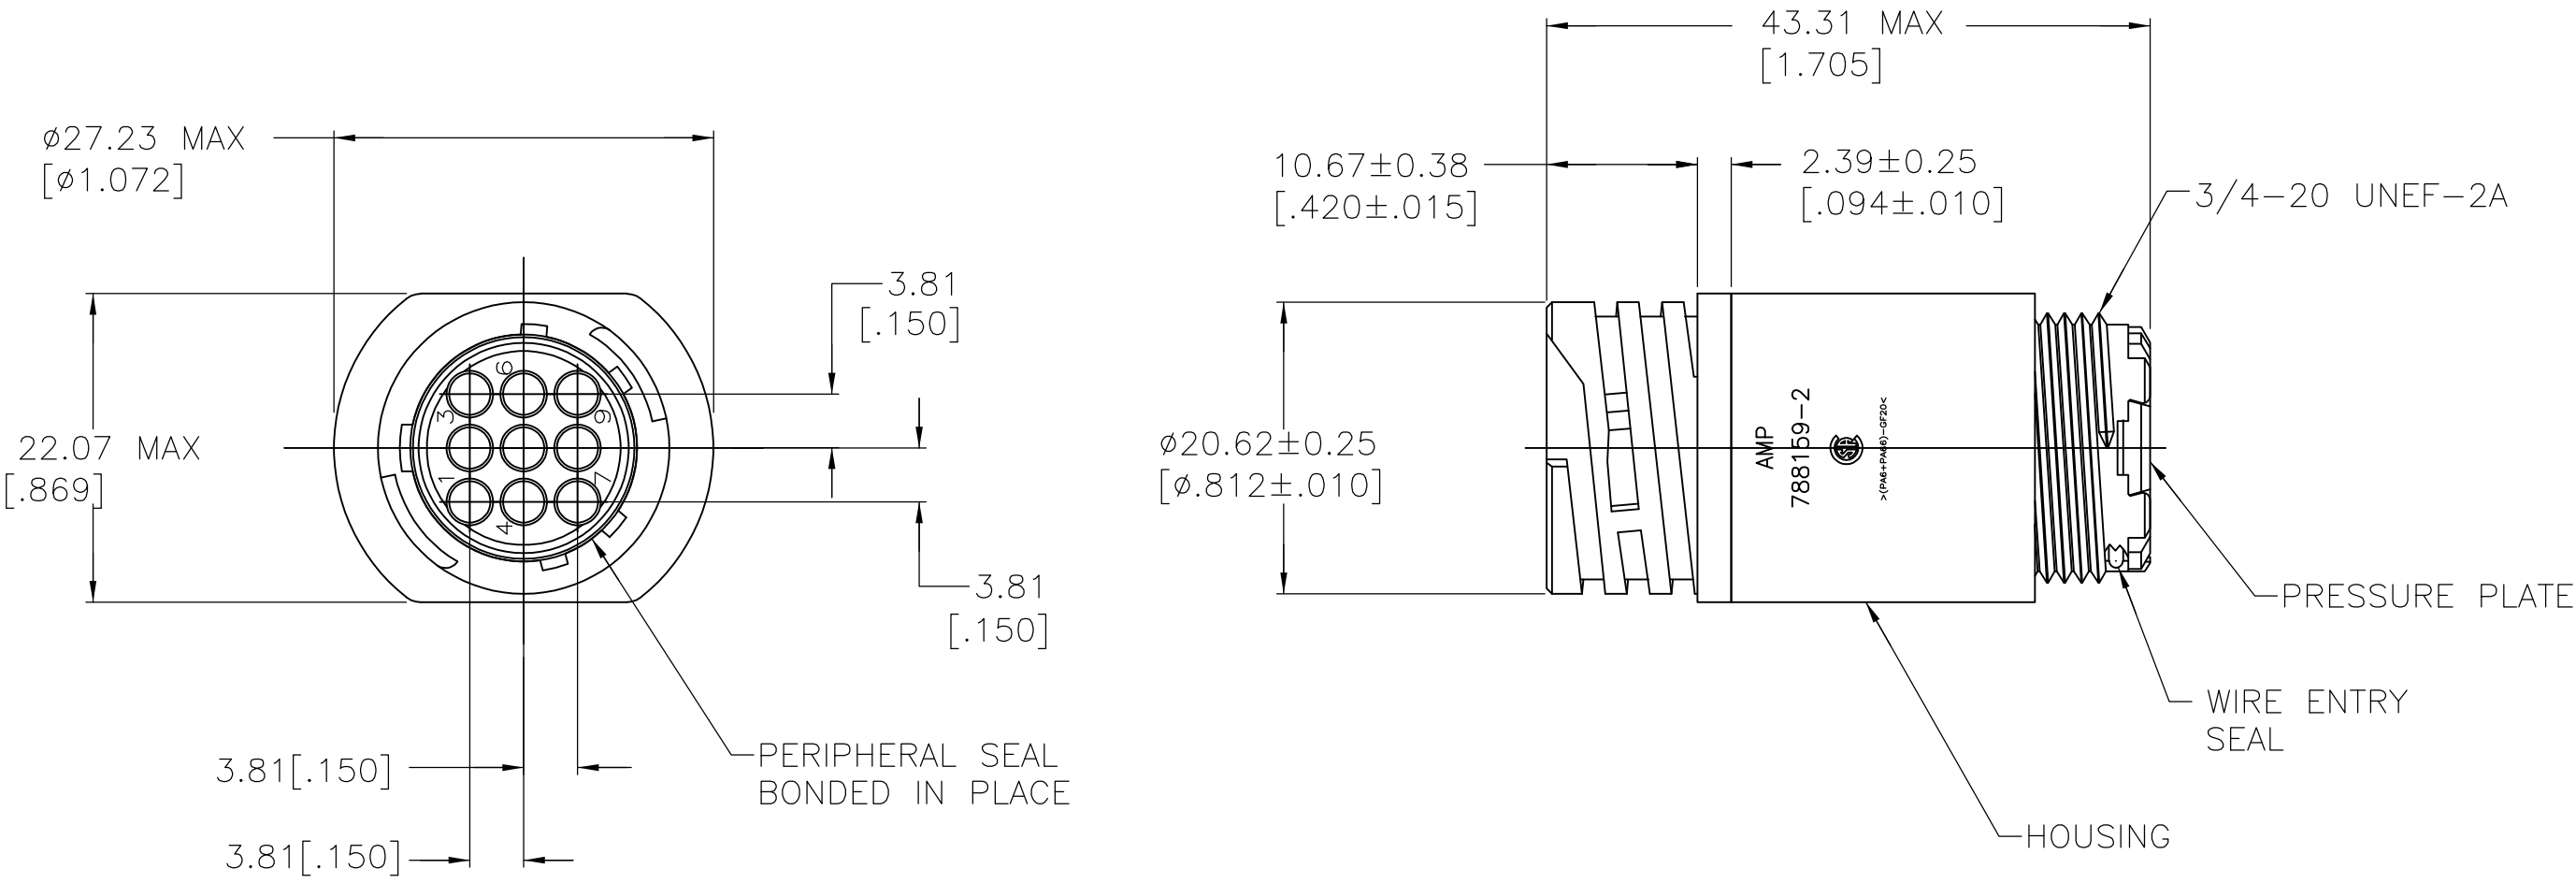

- 1 THIS PART WILL ACCEPT NINE (9) MULTIMATE PIN CONTACTS.
- 2 HOUSING AND PRESSURE PLATE: NYLON, BLACK.
PERIPHERAL SEAL: ELASTOMER, GRAY.
WIRE ENTRY SEAL: ELASTOMER, RED-IRON OXIDE.

.065-.100	STANDARD	788159-2
.040-.080	SMALL	788159-1
WIRE INSULATION DIAMETER RANGE	INSULATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.DORWART 25 AUG 98	 TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK R.WALTER 25 AUG 98	NAME RECEPTACLE ASSEMBLY, 13-9, STANDARD SEX, SERIES I, SEALED, CIRCULAR PLASTIC CONNECTOR				
		APVD R.WALTER 25 AUG 98					
		PRODUCT SPEC —					
		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT	A3	00779	C-788159	—	
		CUSTOMER DRAWING		SCALE	2:1	SHEET	1 OF 1
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± —					
FINISH		—					