
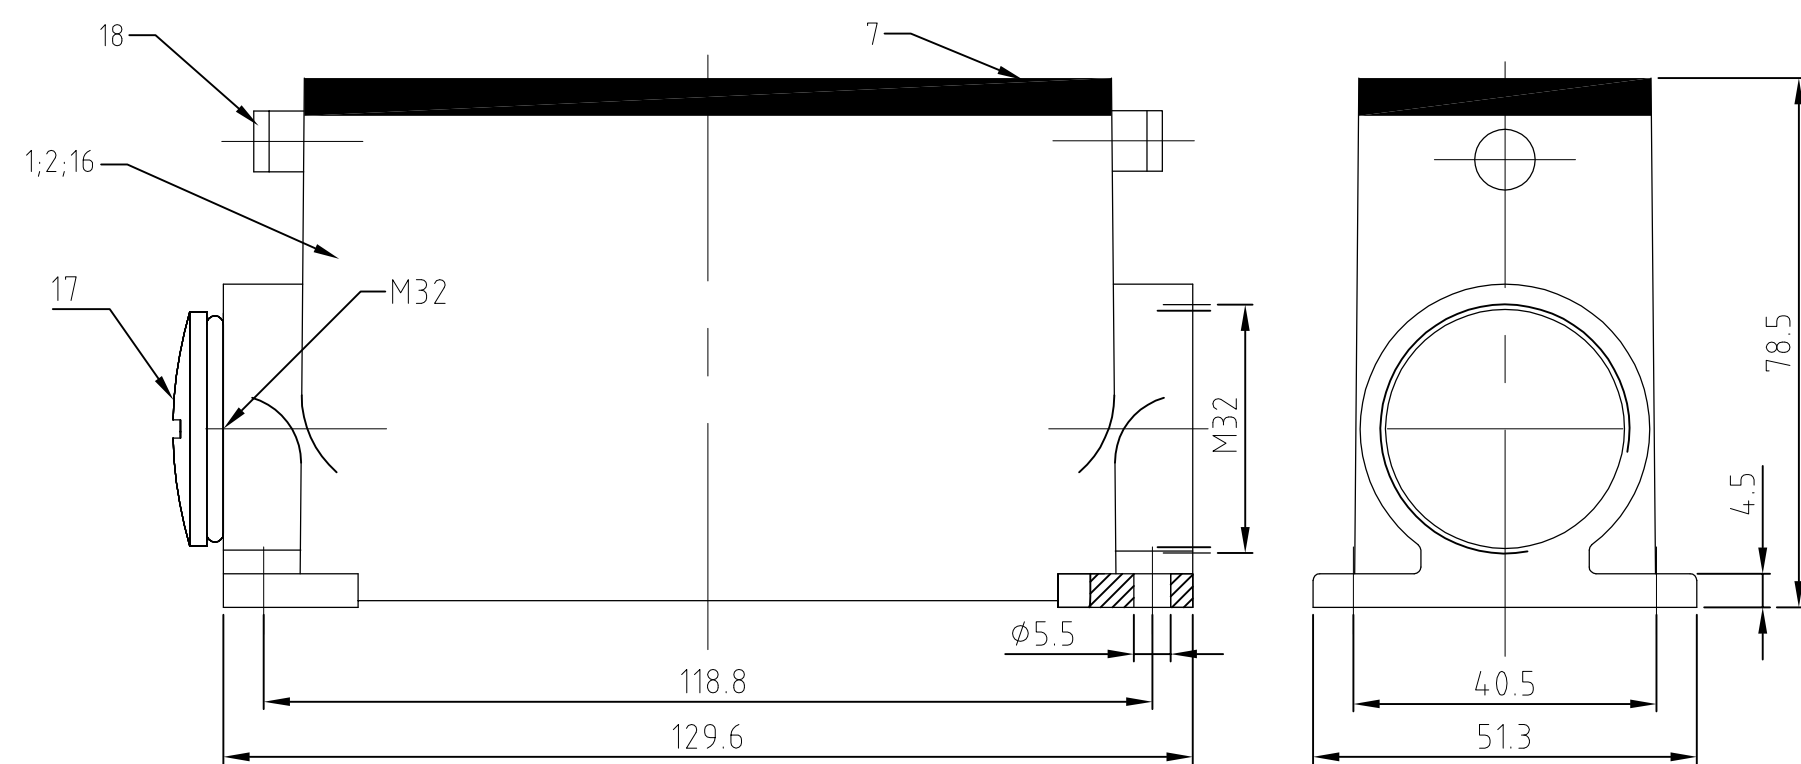
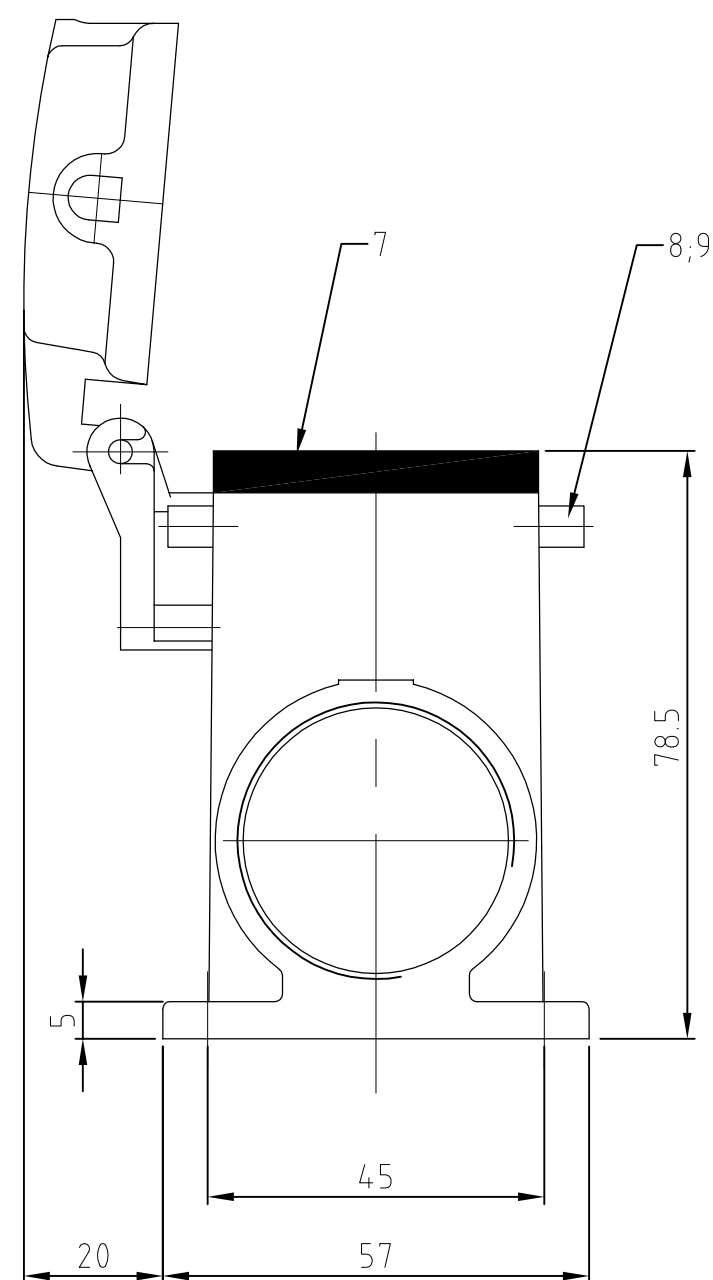
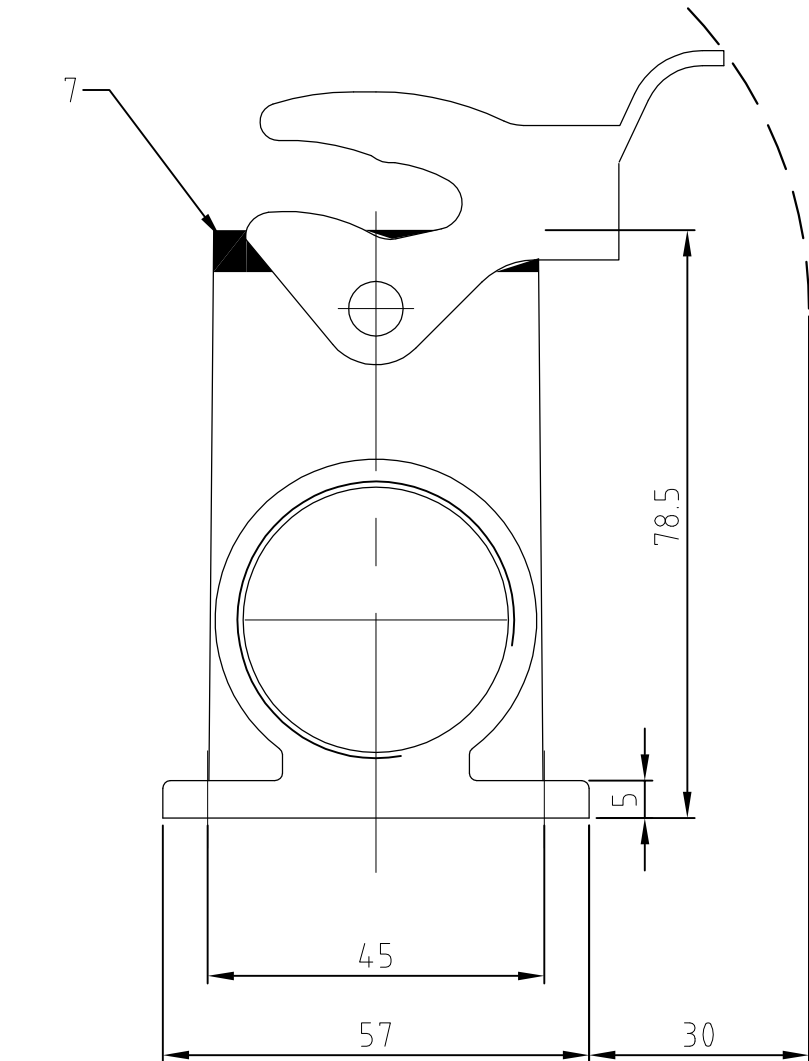
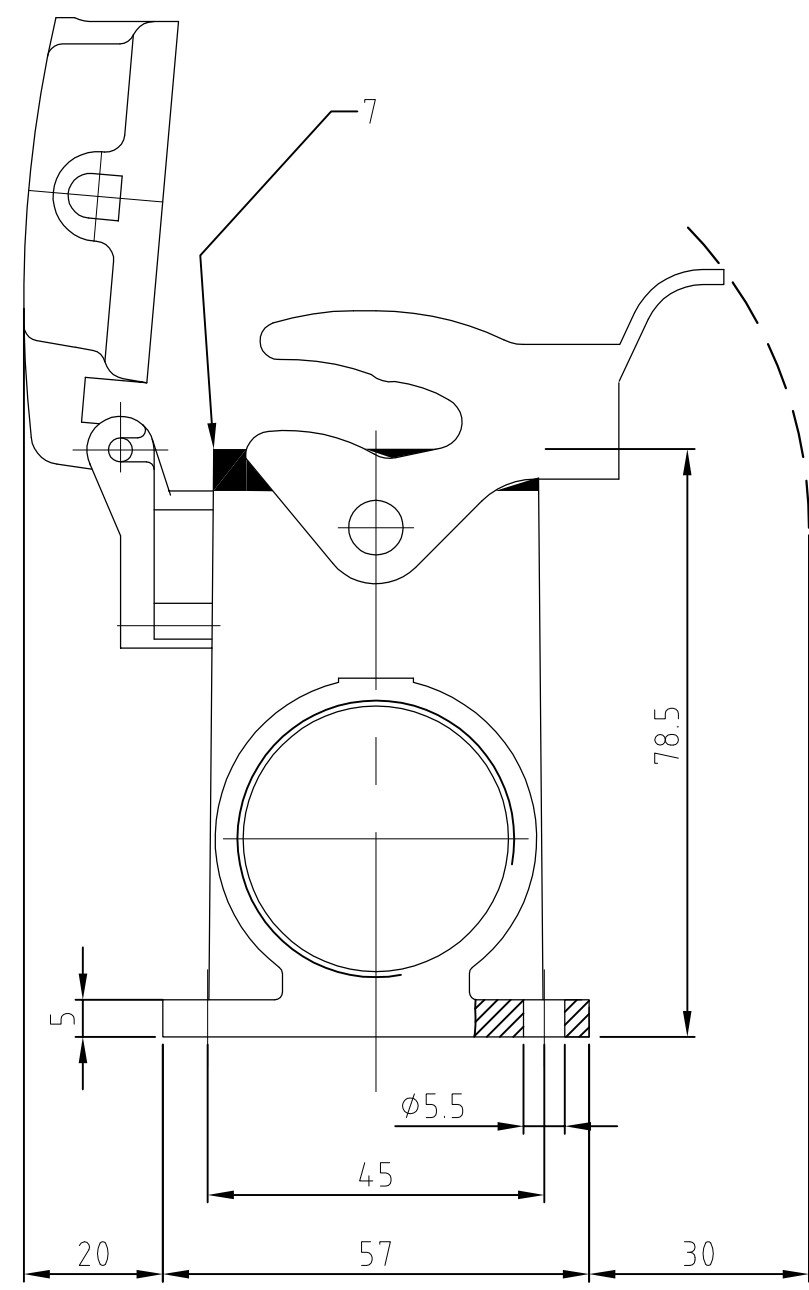




6 VARNISH ON THE INSIDE NOT NECESARILY

THIS DRAWING IS A CONTROLLED DOCUMENT. DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.		DIN 30.09.03 Schneider		 TE Connectivity			
		GDK 30.09.03 Schweiger					
DIMENSIONS: MASSE/WEITEN mm 		TOLERANCES: UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS TO TOLERANCES a. ISO 2768 - mS ± 0.15 b. ISO 16501 - 13.0		NAME Surface mounted housing side entry Sockelgehäuse HD.16/24/64.SG.2.M32.Z -			
		PRODUCT SPEC PRODUCTS/ITEMS 108-74003 APPLICATION SPEC VERARBEITUNGSPEC 114-74001					
MATERIAL	-	WEIGHT	-	SIZE	CAGE CODE	DRAWING NO. BEZEICHNUNG-NR.	RESTRICTED TO NUR FUER
	-	GUSTOMER	-	A1	00779	C-1106469	
FINISH: OBERFLÄCHE/FARBE		CUSTOMER DRAWING / KUNDENZEICHNUNG		SCALE: MASSSTAB: 1:1		SHEET: BLATT 1 OF 1	REV: A6

Technical drawing of a mechanical part, showing front and side views with dimensions and labels.

Front View (Left):

- Overall width: 82
- Overall height: 70
- Top flange thickness: 7
- Bottom flange thickness: 4
- Central hole diameter: $\phi 5.5$
- Side flange height: M32

Side View (Right):

- Overall width: 57
- Overall height: 73.5
- Top flange thickness: 15
- Bottom flange thickness: 5
- Central hole diameter: 45
- Side flange height: 58.5