


- 1. RECOMMENDED SPARE PARTS.
- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4. CUT TO LENGTH AT ASSY.

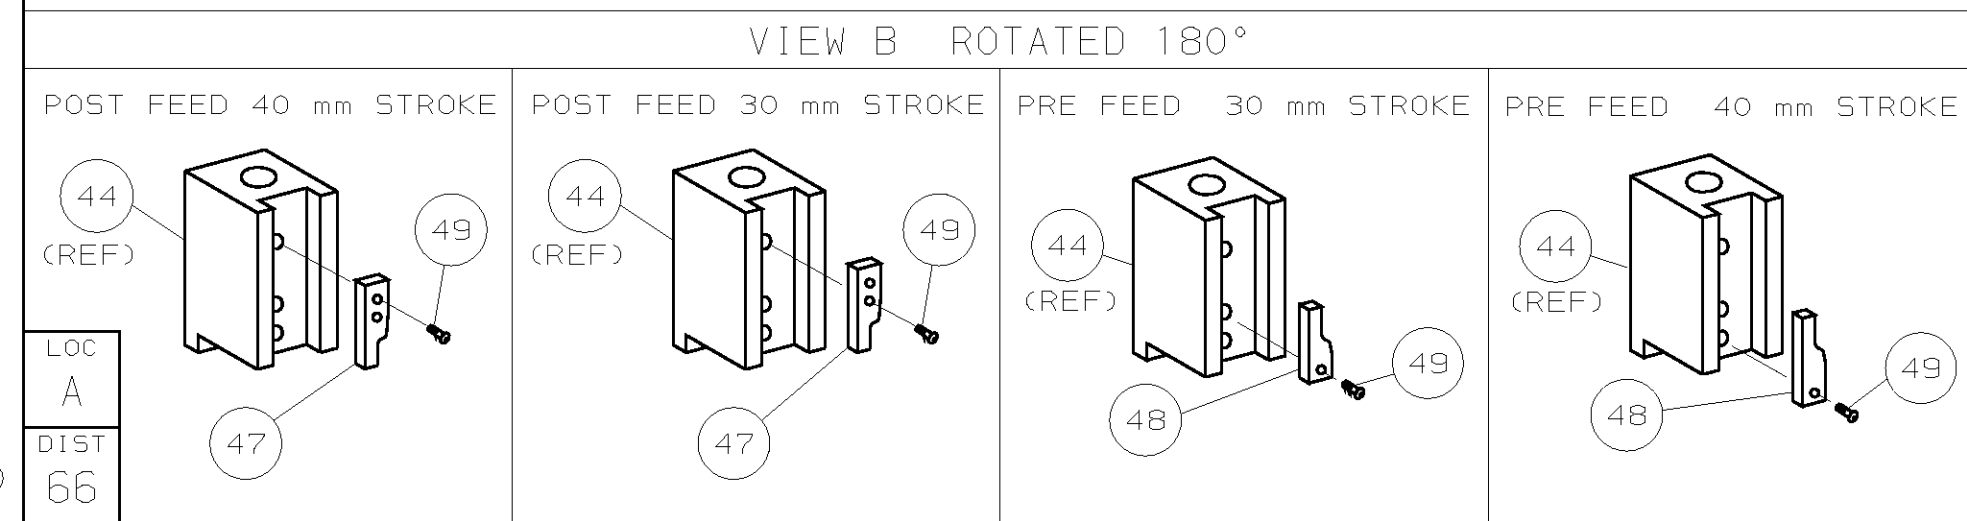

QTY REQD PER ASSY				PARTS LIST							
CMR MC APP	JUL03 FEB01 DATE	DIMENSIONS: mm [INCHES]		MATERIAL		HT TR		FIN			
		DO NOT SCALE PRINT.		-		-		-			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		11 JAN01		11 JAN01					
		1 PLC DEC ± 0.5 [0.02 IN]		DR M.C. CLIFFORD		F. BACKHURST					
		2 PLC DEC $\pm$		CHK 08-02-01		REL 08-02-01					
		3 PLC DEC $\pm$		L. LOFTHOUSE		M.C. CLIFFORD		AMP			
		ANGLES $\pm$		NAME		MACHINE REF					
		SURF TEXTURE: $\checkmark$		SIDE FEED HD-I APPLICATOR		HD-I APPL					
		REMOVE BURRS, BREAK SHARP EDGES RO. 38 MAX		SCALE		DWG NO		SHEET			
				-		1426140		1 OF 1			
								REV			
								B			
CASE CODE		RESTRICTED TO									
00779		CUSTOMER AND ASSEMBLY DRAWING									