

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

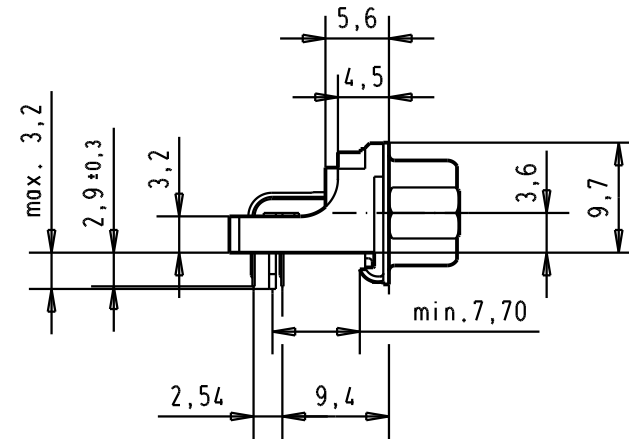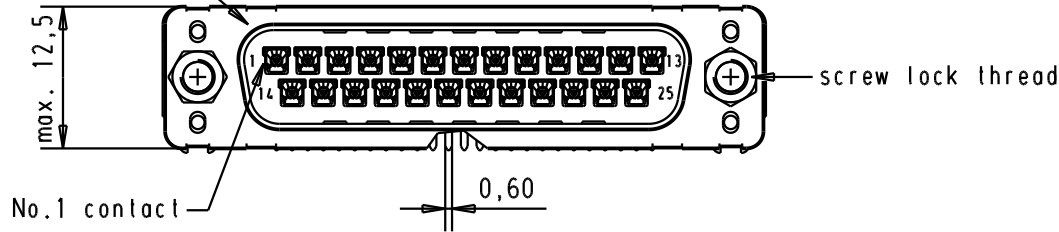


PCB layout hole
component side

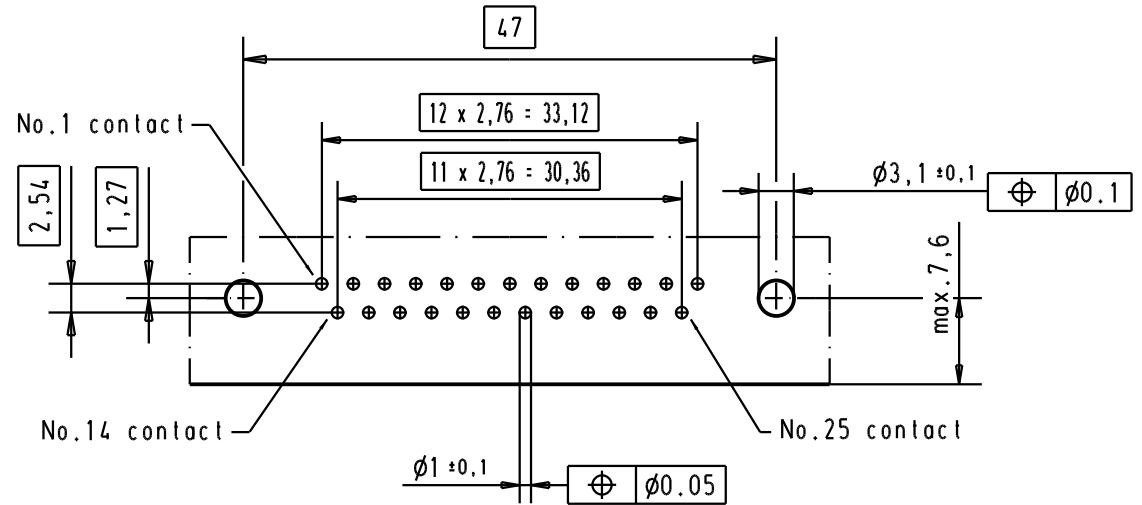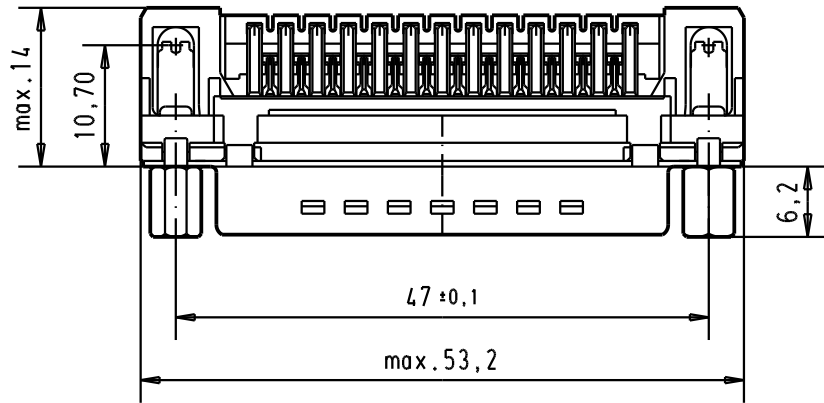

Connector retention and assembling forces on the PCB = 25 / 80 newtons

A

							Dat.	Name			
							Detail.	18/dec/00	ALSPACE		
							Insp.				
							Stand.				
09 65 362 3817	4-40 UNC	1	31084	04/SEP/02	YT						
09 65 362 6817	4-40 UNC	2	29689	03/07/01	AA						
09 65 362 7817	4-40 UNC	3	27960	18/dec/00	ALSPACE						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name						



All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, low profil angle
25 poles, with solder pin,
screw lock, grounding board lock.

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0965362x81x

Sub.

Blatt/ Page

3